

---

# INDEX

---

**COMPANY PROFILE**

**1 - 4**

---

**SCREW CLAMP TERMINAL BLOCKS**

**5 - 72**

---

**CY SERIES SCREW TERMINAL BLOCKS**

**73 - 92**

---

**SPRING CLAMP TERMINAL BLOCKS**

**93 - 142**

---

**CP SERIES PUSH-IN TERMINAL BLOCKS**

**143 - 170**

---

**STUD & BOLT TYPE TERMINAL BLOCKS**

**171 - 195**

---

**MELAMINE TERMINAL BLOCKS**

**196 - 216**

---

**ACCESSORIES**

**217 - 237**

---

**PROFESSIONAL TOOLS**

**238 - 240**

---

**SOCKETS & SWITCHES**

**241 - 242**

---

**TECHNICAL REFERENCE**

**243 - 255**

---


**ALPHABETICAL INDEX**

**256 - 263**







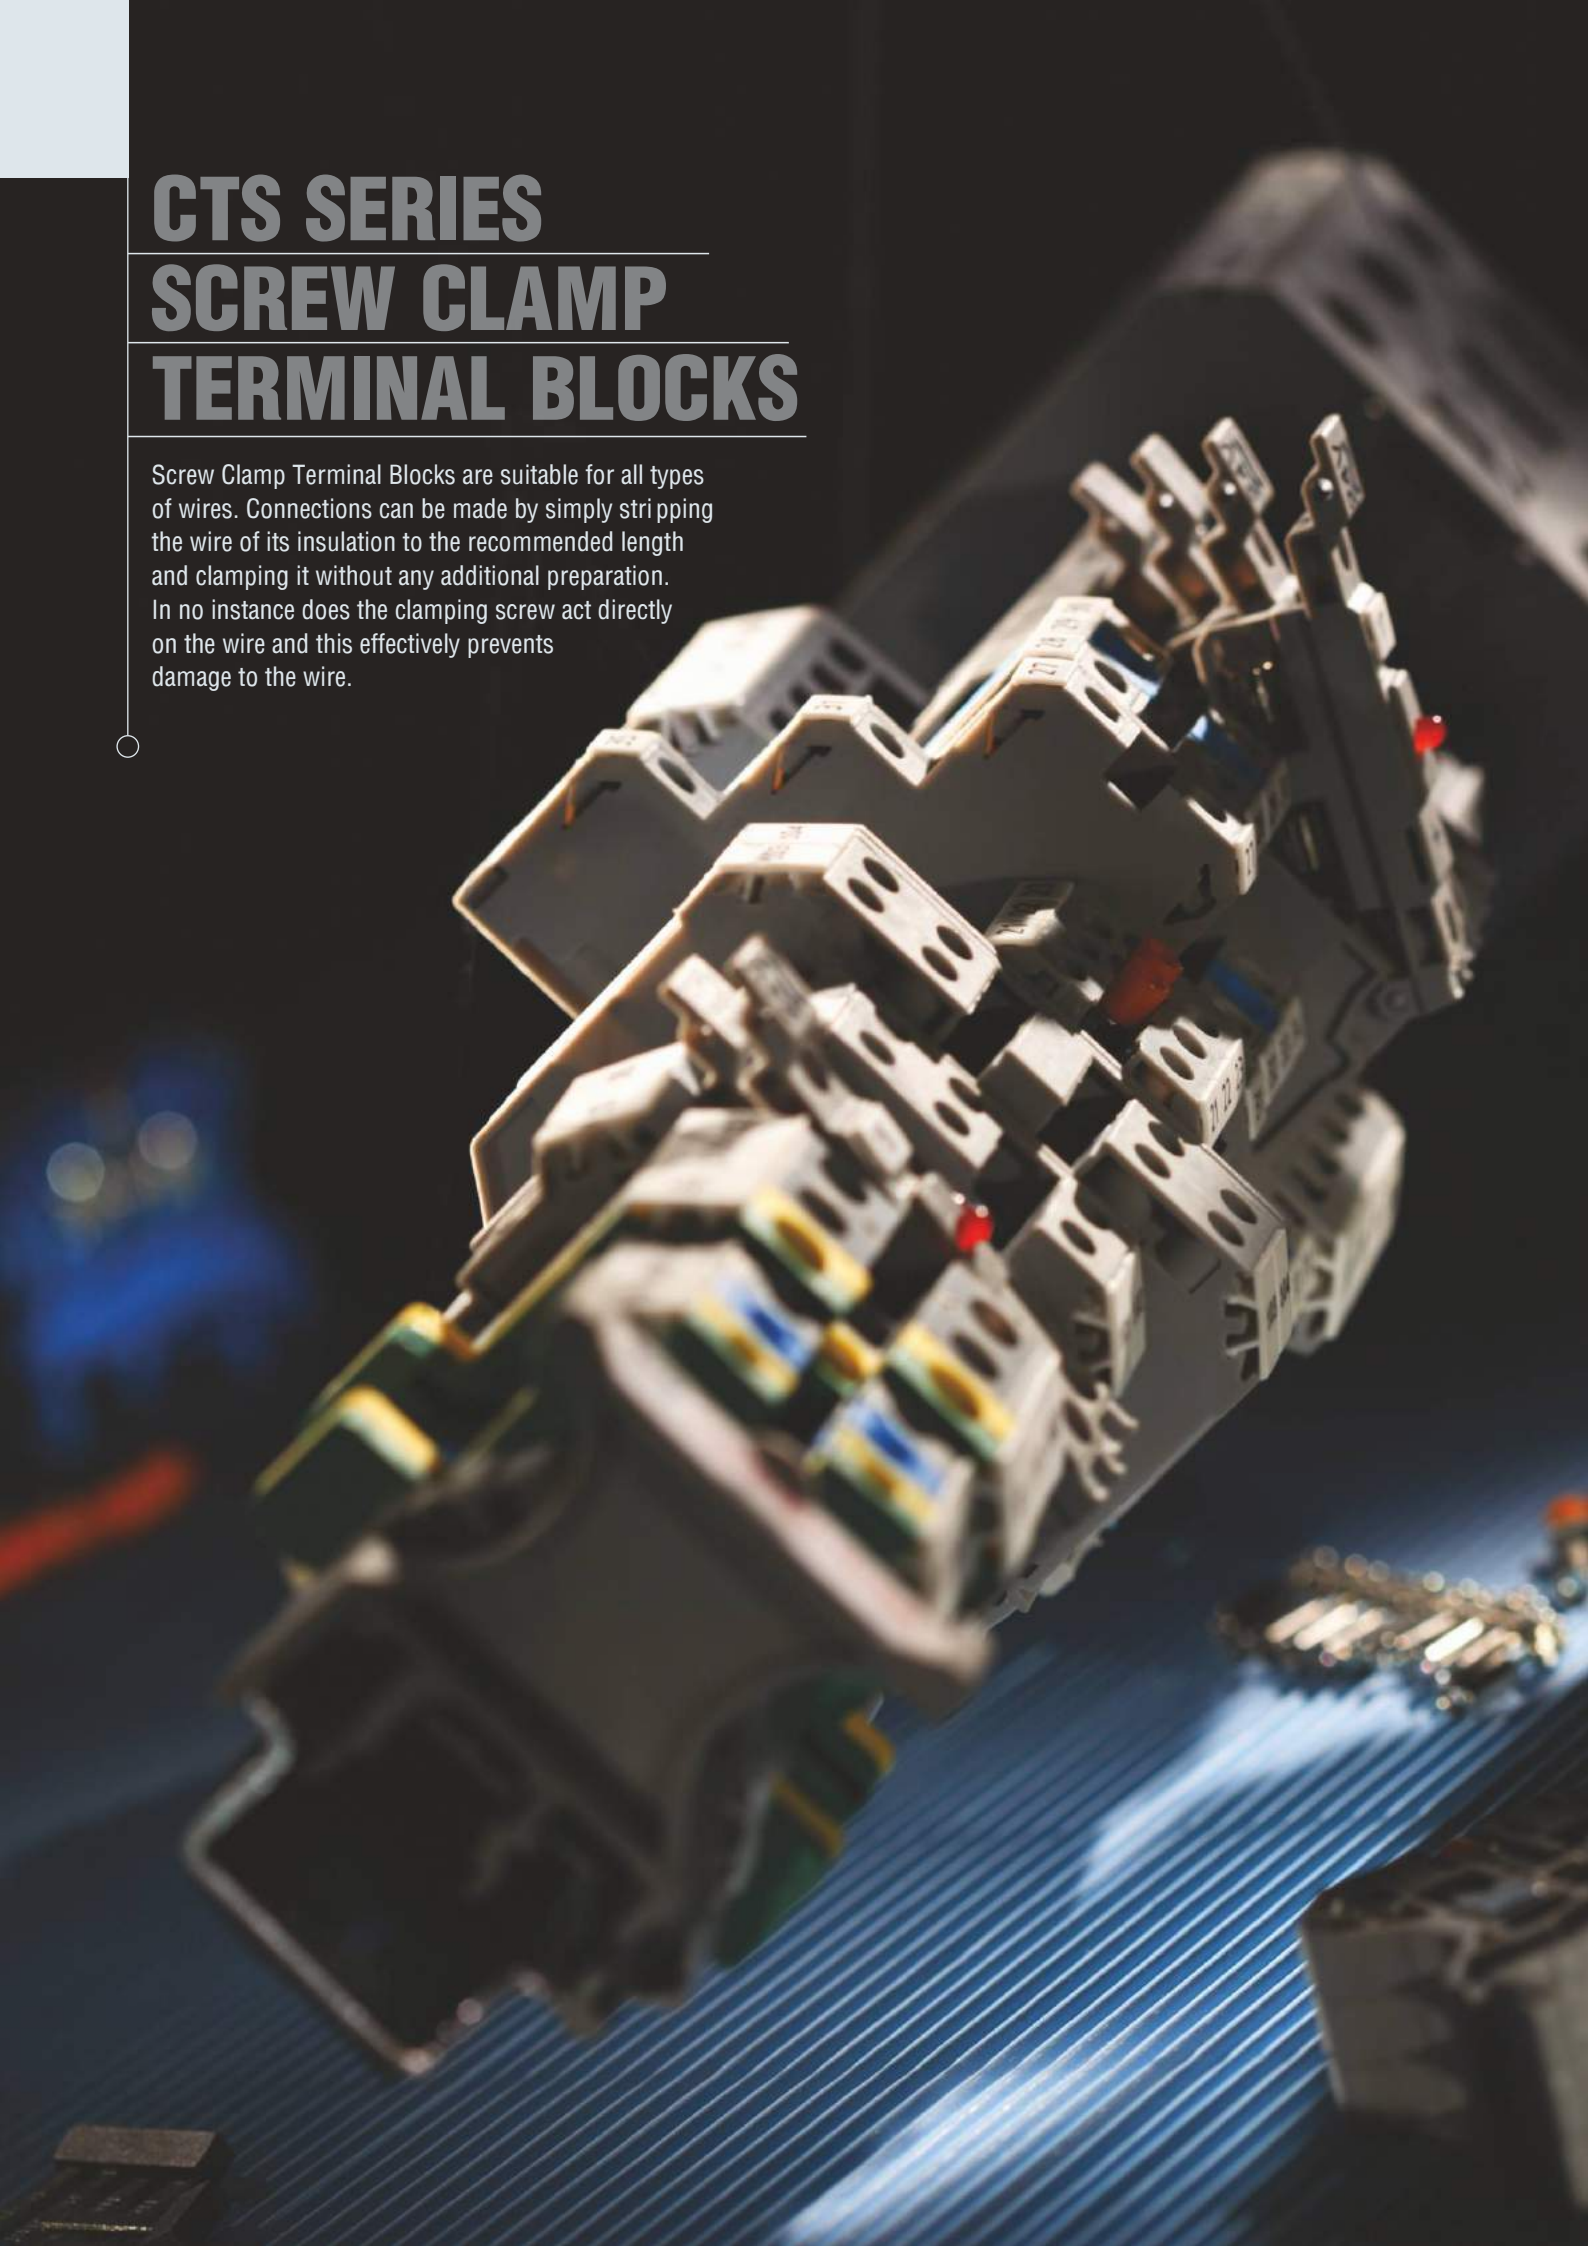











---


# CTS SERIES SCREW CLAMP TERMINAL BLOCKS

Screw Clamp Terminal Blocks are suitable for all types of wires. Connections can be made by simply stripping the wire of its insulation to the recommended length and clamping it without any additional preparation. In no instance does the clamping screw act directly on the wire and this effectively prevents damage to the wire.




## CTS SERIES SCREW CLAMP TERMINAL BLOCKS


	<b>Standard Feed Through</b>	<b>9 - 14</b>
	<b>Multiple Connection</b>	<b>15 - 16</b>
	<b>Multiple Level</b>	<b>17 - 24</b>
	<b>Ground / Earth</b>	<b>25 - 28</b>
	<b>Neutral / Earth Clamps</b>	<b>29 - 30</b>
	<b>Screw Type Shield Connection Clamps</b>	<b>31</b>
	<b>Spring Type Shield Connection Clamps</b>	<b>32</b>
	<b>Fuse Terminal</b>	<b>33 - 34</b>
	<b>Double Level Fuse</b>	<b>35 - 36</b>
	<b>Disconnect &amp; Test</b>	<b>37 - 48</b>
	<b>Distribution Blocks</b>	<b>48 - 52</b>
	<b>Compact Distribution Blocks</b>	<b>53 - 55</b>
	<b>Component Carrier</b>	<b>56</b>
	<b>High Voltage</b>	<b>57 - 58</b>
	<b>Spring Loaded</b>	<b>59 - 62</b>
	<b>Micro &amp; Panel Mount</b>	<b>63 - 64</b>
	<b>Thermocouple &amp; Tab Connection</b>	<b>65 - 66</b>
	<b>With Electronic Components</b>	<b>67 - 72</b>

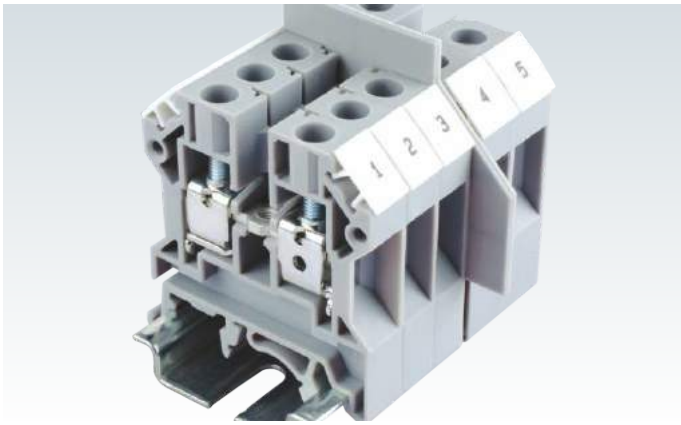


A high torque clamping system on the Screw Clamp Terminal Blocks ensures safe, gas tight connections. Cold forged, rolled threaded screws ensure highly reliable connections.

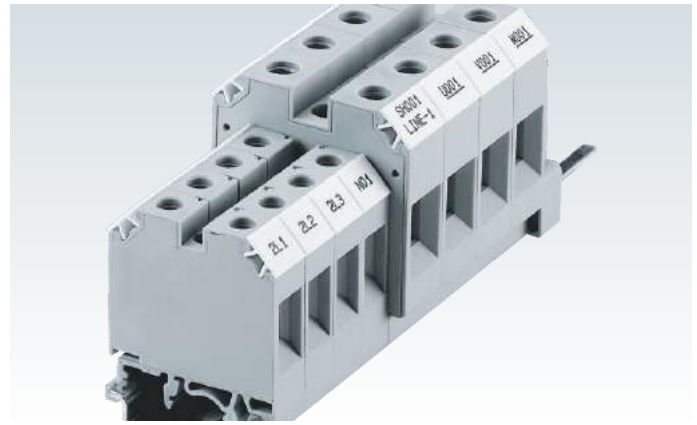

An end plate forms is integral to all Terminal Blocks for 16 mm<sup>2</sup> wires and above, their by completely closing the Terminal Blocks. This ensures safe isolation for power connections.

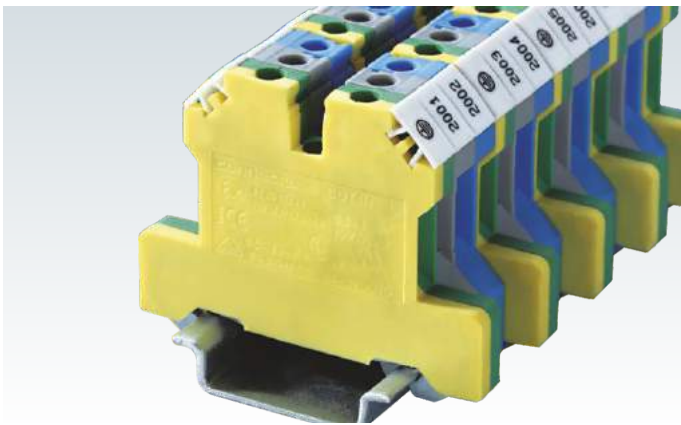


Same profile grounding terminals are clearly identified with a green-yellow housing. Their shape and thickness is identical to the FeedThrough Terminal Blocks.

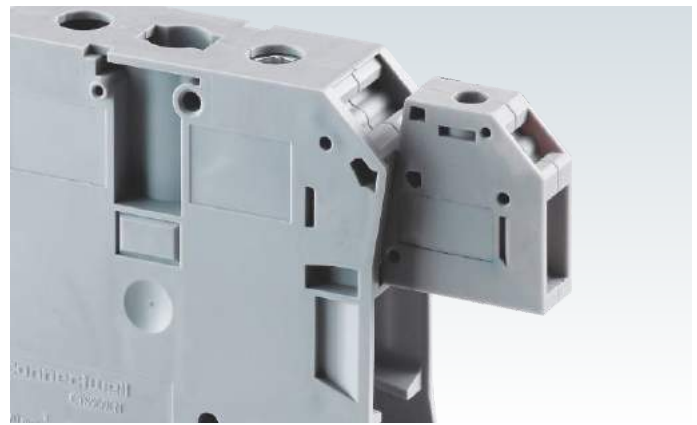


In high current Terminal Blocks, an additional auxillary terminal can be connected. This enables an additional connection of upto 6 mm<sup>2</sup> wires.




Two level plus ground and Three level plus ground terminals facilitate single & three phase connections. These Terminal Blocks are an ideal choice for space saving applications.

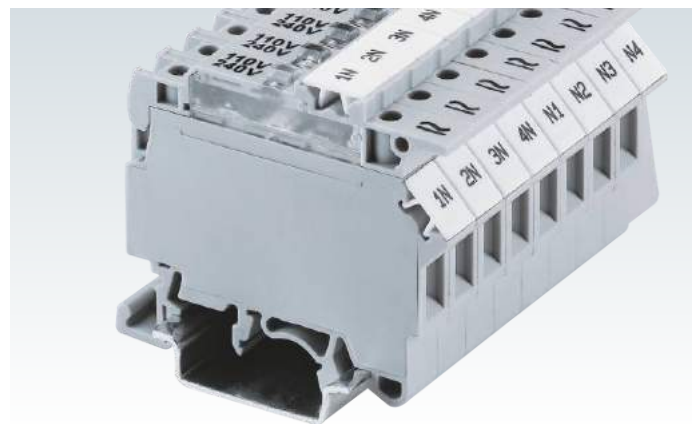


Universal voltage rating of 6 - 60V & 110 - 240V is available on Fuse Terminal Blocks with offline indication. Both AC & DC circuits can be connected without any polarisation requirement.

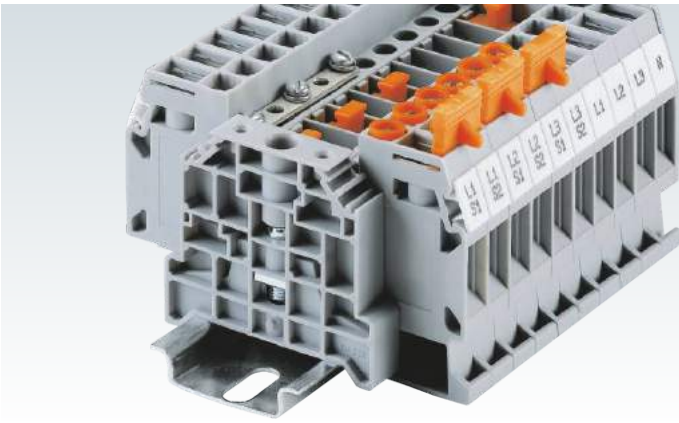

CDS6U Terminal Block system is a versatile wire connection method for current transformer and power meters. A wide range of accessories eases the testing of connected instruments.

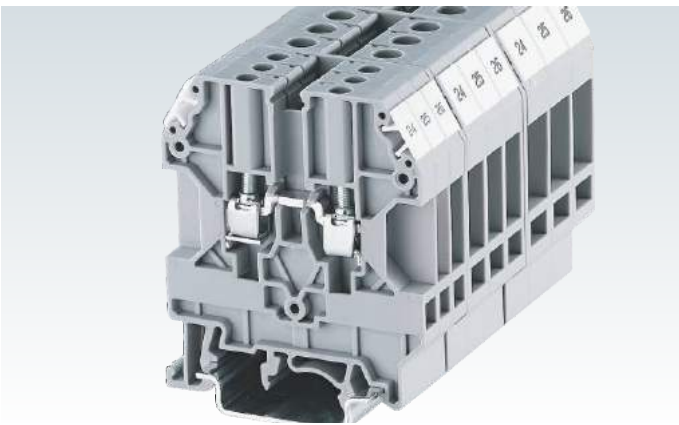


The CHV series High Voltage Terminal Blocks are suitable for upto 1500V DC applications required in the solar industry. The specially designed creepage and clearance distances help achieve the high voltage specifications.

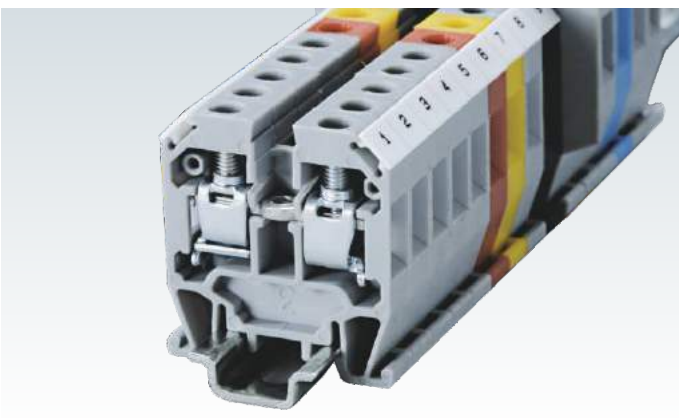


Ideal for applications with limited space, these miniature blocks can be mounted on a special DIN15 rail.

# STANDARD FEED THROUGH TERMINAL BLOCKS

These Feed Through Terminal Blocks are the most versatile terminals for Control, Automation, Instrumentation and Power Distribution applications. A specially designed flexible foot enables easy mounting and dismounting from the DIN rail with the help of a screw driver. These Terminal Blocks have marker holding recesses to accept marking tags for circuit identification. Cross connection can be achieved with the aid of shorting links / sleeves & screws.

The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.


## CTS2.5UN



Width (Thickness) x Length	5 x 43 mm				
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	46.2 mm / 53.7 mm / 51.1 mm				
Connection Possibility as per	IEC		UL - CSA		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG		
	Solid	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG		
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG		
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 16 AWG		
	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	22 - 16 AWG		
Wire Stripping Length	8 mm				
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7	
Voltage	1000 V	600 V	600 V	690 V	
Current	24 A	25 A	25 A	21 A	
Torque	0.4 Nm	7 lb-in	7 lb-in	0.4 Nm	
Approvals					
Insulation Material / Material Group	Polyamide 6,6 / 1				
Rated Impulse Voltage / Pollution Degree	8 KV / 3				
	Type / Cat. No.		Standard Pack		
Terminal Block	Grey	CTS2.5UN	100		
	Blue	CTS2.5UNBU	100		
	Red	CTS2.5UNR	100		
	Yellow	CTS2.5UNY	100		
	Black	CTS2.5UNBK	100		
	Green	CTS2.5UNGN	100		
	Orange	CTS2.5UNO	100		
	White	CTS2.5UNW	100		
	Ground / Earth (Refer Pg. 25-26 for Details)		CGT4N	50	
	End Plate		EP2.5/4UN	50	
Partition Plate		PP2.5/4UN	50		
Separator Plate		SP2.5/4UN	100		
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m		
		CA701-15-1M / CA701-15-1M-S	25 m		
End Clamp (Refer Pg. 220 for details)		CA702 / CA802	50		
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT	100		
Screw Driver		SCS0.5/3	Blade size: 0.5 x 3.0 mm	10	

Shorting Links		Uninsulated	Insulated	Imax	Standard Pack
Pre Assembled Shorting Links	2 pole	CA721/2	CA741/2	24 A	100
	3 pole	CA721/3	CA741/3	24 A	100
	4 pole	CA721/4	CA741/4	24 A	100
	10 pole	CA721/10	CA741/10	24 A	10
	100 pole	CA721/100	CA741/100	24 A	10
Permanent Shorting Links	2 pole	CA703/01		24 A	100
	3 pole	CA704/01		24 A	100
	4 pole	CA705/01		24 A	100
	10 pole	CA731/10		24 A	100
	100 pole (Breakable)	CA731/100		24 A	10
Short Sleeve & Screw for Permanent Shorting Links		CA707/S/Q/01			100
Switchable Shorting Links		CA706/01		24 A	100
Long Sleeve & Screw for Switchable Shorting Links		CA707/L/Q/01			100
Insulated External Shorting Links	2 pole		CA717/2	24 A	100
	3 pole		CA717/3	24 A	100
	4 pole		CA717/4	24 A	100
	10 pole		CA717/10	24 A	20
Test Socket		CA707/TS/01			100

**CTS2.5UE**



6 x 43 mm

46.2 mm / 53.7 mm / 51.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

1000 V	600 V	600 V	690 V
30 A	30 A	30 A	28 A
0.5 Nm	7 lb-in	7 lb-in	0.4 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS2.5UE	100
CTS2.5UEBU	100
CTS2.5UER	100
CTS2.5UEY	100
CTS2.5UEBK	100
CTS2.5UEGN	100
CTS2.5UEO	100
CTS2.5UEW	100
CGT4N	50
EP2.5/4UN	50
PP2.5/4UN	50
SP2.5/4UN	100
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

**CTS4UN**



6 x 43 mm

46.2 mm / 53.7 mm / 51.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

1000 V	600 V	600 V	690 V
32 A	35 A	35 A	28 A
0.5 Nm	7 lb-in	7 lb-in	0.5 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS4UN	100
CTS4UNBU	100
CTS4UNR	100
CTS4UNY	100
CTS4UNBK	100
CTS4UNGN	100
CTS4UNO	100
CTS4UNW	100
CGT4N	50
EP2.5/4UN	50
PP2.5/4UN	50
SP2.5/4UN	100
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

**CTS6U**



8 x 43 mm

47.8 mm / 55.5 mm / 52.8 mm

IEC	UL - CSA
0.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.5 - 6.0 mm <sup>2</sup>	
0.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG

9 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

1000 V	600 V	600 V	690 V
41 A	50 A	50 A	36 A
0.8 Nm	14 lb-in	14 lb-in	0.8 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS6U	100
CTS6UBU	100
CTS6UR	100
CTS6UY	100
CTS6UBK	100
CTS6UGN	100
CTS6UO	100
CTS6UW	100
CGT6N	50
EP6/10U	50
PP6/10U	50
SP6/10U	100
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Uninsulated	Insulated	Imax	Standard Pack
CA722/2	CA742/2	32 A	100
CA722/3	CA742/3	32 A	100
CA722/4	CA742/4	32 A	100
CA722/10	CA742/10	32 A	10
CA722/100	CA742/100	32 A	10
CA703/1		32 A	100
CA704/1		32 A	100
CA705/1		32 A	100
CA732/10		32 A	100
CA732/10-A		32 A	100
CA732/100		32 A	10
CA707/S/Q/01			100
CA706/1		32A	100
CA707/L/Q/01			100
	CA713/2	30 A	100
	CA713/3	30 A	100
	CA713/4	30 A	100
	CA713/10	30 A	20
CA707/TS/01			100


Uninsulated	Insulated	Imax	Standard Pack
CA722/2	CA742/2	32 A	100
CA722/3	CA742/3	32 A	100
CA722/4	CA742/4	32 A	100
CA722/10	CA742/10	32 A	10
CA722/100	CA742/100	32 A	10
CA703/1		32 A	100
CA704/1		32 A	100
CA705/1		32 A	100
CA732/10		32 A	100
CA732/10-A		32 A	100
CA732/100		32 A	10
CA707/S/Q/01			100
CA706/1		32A	100
CA707/L/Q/01			100
	CA713/2	30 A	100
	CA713/3	30 A	100
	CA713/4	30 A	100
	CA713/10	30 A	20
CA707/TS/01			100

Uninsulated	Insulated	Imax	Standard Pack
CA723/2	CA743/2	41 A	100
CA723/3	CA743/3	41 A	50
CA723/4	CA743/4	41 A	50
CA723/10	CA743/10	41 A	10
CA703/2		41 A	100
CA704/2		41 A	100
CA705/2		41 A	100
CA733/10		41 A	100
CA707/S/Q/1			100
CA706/2		41A	100
CA707/L/Q/1			100
	CA710/2	35 A	100
	CA710/3	35 A	50
	CA710/4	35 A	50
	CA710/10	35 A	20
CA707/TS/05			100




# STANDARD FEED THROUGH TERMINAL BLOCKS

## CTS10U



## CTS16U




Width (Thickness) x Length	10 x 43 mm				12 x 43 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	47.8 mm / 55.5 mm / 52.8 mm				47.8 mm / 55.5 mm / 52.8 mm			
Connection Possibility as per	IEC		UL - CSA		IEC		UL - CSA	
	0.5 - 10.0 mm <sup>2</sup>		16 - 6 AWG		0.2 - 16.0 mm <sup>2</sup>		20 - 4 AWG	
With 1 Conductor per clamp	Stranded / Flexible		16 - 6 AWG		0.2 - 16.0 mm <sup>2</sup>		20 - 4 AWG	
	Solid with Ferrule / Lug		16 - 6 AWG		0.2 - 10.0 mm <sup>2</sup>		20 - 8 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible		16 - 10 AWG		0.2 - 10.0 mm <sup>2</sup>		20 - 8 AWG	
	with TWIN Ferrule / Lug		16 - 10 AWG		0.2 - 10.0 mm <sup>2</sup>		20 - 8 AWG	
Wire Stripping Length	11 mm				12 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7	IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7
Voltage	1000 V	600 V	600 V	690 V	1000 V	600 V	600 V	690 V
Current	57 A	65 A	65 A	50 A	76 A	85 A	70 A	66 A
Torque	1.2 Nm	14 lb-in	14 lb-in	1.2 Nm	1.2 Nm	14 lb-in	14 lb-in	2.0 Nm
Approvals								
Insulation Material / Material Group	Polyamide 6,6 / 1				Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3				8 KV / 3			

		Type / Cat. No.	Standard Pack			Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CTS10U	100			CTS16U	50	
	Blue	CTS10UBU	100			CTS16UBU	50	
	Red	CTS10UR	100			CTS16UR	50	
	Yellow	CTS10UY	100			CTS16UY	50	
	Black	CTS10UBK	100			CTS16UBK	50	
	Green	CTS10UGN	100			CTS16UGN	50	
	Orange	CTS10UO	100					
	White	CTS10UW	100					
	Ground / Earth (Refer Pg. 27-28 for Details)		CGT10N			50	CGT16N	50
	End Plate		EP6/10U			50		
Partition Plate		PP6/10U	50					
Separator Plate		SP6/10U	100	SP6/10U	100			
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m			
		CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m			
End Clamp (Refer Pg. 220 for details)		CA702 / CA802	50	CA702 / CA802	50			
Marking Tags (Refer Pg. 224 for details)		CA509/K10WHT	100	CA509/K12WHT	100			
Screw Driver		SCS0.8/4 Blade size: 0.8 x 4 mm	10	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10			

Shorting Links		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	
Pre Assembled Shorting Links		2 pole	CA724/2	CA744/2	57 A	100	CA751/2	CA761/2	65 A	50
		3 pole	CA724/3	CA744/3	57 A	50	CA751/3	CA761/3	65 A	50
		4 pole	CA724/4	CA744/4	57 A	50	CA751/4	CA761/4	65 A	50
		10 pole	CA724/10	CA744/10	57 A	10	CA751/10	CA761/10	65 A	10
Permanent Shorting Links		2 pole	CA703/3		57 A	100	CA703/8		65 A	100
		3 pole	CA704/3		57 A	100	CA704/8		65 A	100
		4 pole	CA705/3		57 A	100	CA705/8		65 A	100
		10 pole	CA734/10		57 A	100	CA739/10		65 A	100
Short Sleeve & Screw for Permanent Shorting Links		CA707/S/Q/1			100		CA707/S/Q/1			100
Switchable Shorting Links		CA706/3		57 A	100					
Long Sleeve & Screw for Switchable Shorting Links		CA707/L/Q/1			100					
Insulated External Shorting Links		2 pole		CA718/2	57 A	100				
		3 pole		CA718/3	57 A	50				
		4 pole		CA718/4	57 A	50				
		10 pole		CA718/10	57 A	20				
Test Socket		CA707/TS/05			100		CA707/TS/05			100

**CTS25UN**



12 x 48 mm  
57.2 mm / 64.7 mm / 62.3 mm

IEC	UL - CSA
4.0 - 25.0 mm <sup>2</sup>	14 - 2 AWG
4.0 - 25.0 mm <sup>2</sup>	14 - 2 AWG
4.0 - 16 mm <sup>2</sup>	14 - 4 AWG
4.0 - 10 mm <sup>2</sup>	14 - 6 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

1000 V	600 V	600 V	690 V
101 A	105 A	85 A	88 A
2.0 Nm	30 lb-in	18 lb-in	2.0 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS25UN	50
CTS25UNBU	50
CTS25UNNR	50
CTS25UNY	50
CTS25UNBK	50
CTS25UNGN	50

**CTS35UN**



16 x 50.5 mm  
59.2 mm / 66.7 mm / 64.3 mm

IEC	UL - CSA
4.0 - 35.0 mm <sup>2</sup>	12 - 1/0 AWG
4.0 - 35.0 mm <sup>2</sup>	12 - 1/0 AWG
4.0 - 16.0 mm <sup>2</sup>	12 - 4 AWG
4.0 - 16.0 mm <sup>2</sup>	12 - 8 AWG

15 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

1000 V	600 V	600 V	800 V
125 A	150 A	130 A	109 A
2.5 Nm	30 lb-in	25 lb-in	2.5 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS35UN	50
CTS35UNBU	50
CTS35UNNR	50
CTS35UNY	50
CTS35UNBK	50
CTS35UNGN	50

CGT35U	20
--------	----

PP35UN	50
--------	----

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m

CA702 / CA802	50
---------------	----

CA509/K16WHT	100
--------------	-----

SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10
-------------------------------------	----



Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA725/2	CA745/2	90 A	50
CA725/3	CA745/3	90 A	20
CA725/4	CA745/4	90 A	20
CA725/10	CA745/10	90 A	10

CA703/4		90 A	100
CA704/4		90 A	100
CA705/4		90 A	100
CA735/10		90 A	100

CA707/S/Q/2	100
-------------	-----

CA707/TS/06	100
-------------	-----

**CTS35UNA**



With Allen screw



16 x 50.5 mm  
59.2 mm / 66.7 mm / 64.3 mm

IEC	UL - CSA
4.0 - 35.0 mm <sup>2</sup>	12 - 2 AWG
4.0 - 35.0 mm <sup>2</sup>	12 - 2 AWG
4.0 - 16.0 mm <sup>2</sup>	12 - 4 AWG
4.0 - 16.0 mm <sup>2</sup>	12 - 8 AWG

15 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	600 V	600 V
125 A	150 A	130 A
2.5 Nm	30 lb-in	25 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS35UNA	50
CTS35UNABU	50
CTS35UNAR	50
CTS35UNAY	50
CTS35UNABK	50
CTS35UNAGN	50

CGT35U	20
--------	----

PP35UN	50
--------	----

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m

CA702 / CA802	50
---------------	----

CA509/K16WHT	100
--------------	-----

SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10
-------------------------------------	----

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA771/2	CA781/2	105 A	50
CA771/3	CA781/3	105 A	20
CA771/4	CA781/4	105 A	20
CA771/10	CA781/10	105 A	10


CA703/10		105 A	100
CA704/10		105 A	100
CA705/10		105 A	100
CA770/10		105 A	10

CA707/S/Q/2	100
-------------	-----

CA707/TS/06	100
-------------	-----

# STANDARD FEED THROUGH TERMINAL BLOCKS

## CTS50/70N

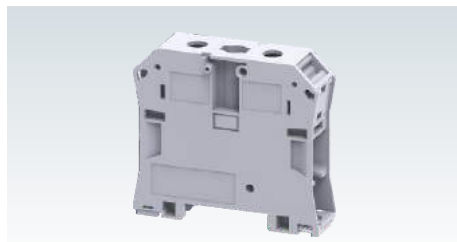

## CTS50/70NA



With Allen screw

Width (Thickness) x Length	20.5 x 77 mm			20.5 x 77 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	71.1 mm / 78.1 mm			71.1 mm / 78.1 mm		
Connection Possibility as per	IEC	UL - CSA		IEC	UL - CSA	
		With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug		10.0 - 70.0 mm <sup>2</sup>	8 - 2/0 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	10.0 - 35.0 mm <sup>2</sup>	8 - 2 AWG	10.0 - 35.0 mm <sup>2</sup>	8 - 2 AWG	8 - 2 AWG
Wire Stripping Length	22 mm			22 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	1000 V	1000 V	1000 V	1000 V	1000 V	1000 V
Current	192 A	175 A	175 A	192 A	175 A	175 A
Torque	3.0 Nm	38 lb-in	38 lb-in	3.0 Nm	38 lb-in	38 lb-in
Approvals						
Insulation Material / Material Group	Polyamide 6,6 / 1			Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3			8 KV / 3		

		Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	Grey	CTS50/70N	20	CTS50/70NA	20
	Blue	CTS50/70NBU	20	CTS50/70NABU	20
	Red	CTS50/70NR	20	CTS50/70NAR	20
	Yellow	CTS50/70NY	20	CTS50/70NAY	20
	Black	CTS50/70NBK	20	CTS50/70NABK	20
	Green	CTS50/70NGN	20	CTS50/70NAGN	20
Auxiliary / Pick Off Terminal		AUX6	10	AUX6	10
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA202 / CA102	50	CA202 / CA102	50
Marking Tags (Refer Pg. 224 for details)		CA509/K16WHT	100	CA509/K16WHT	100

		Type / Cat. No.	Imax	Standard Pack	Type / Cat. No.	Imax	Standard Pack
Shorting Link System		CA628/2	192 A	10	CA628/2	192 A	10
		CA628/3	192 A	10	CA628/3	192 A	10

### CTS95/120N



With Allen screw

27 x 85 mm

83.0 mm / 90.5 mm

IEC	UL - CSA
25.0 - 120.0 mm <sup>2</sup>	2 - 250 kcmil
25.0 - 120.0 mm <sup>2</sup>	2 - 250 kcmil

25.0 - 70 mm<sup>2</sup>      2 - 2/0 AWG

24 mm

IEC60947-7-1    UL-1059    CSA22.2-158

1000 V	1000 V	1000 V
269 A	240 A	240 A
6.0 Nm	90 lb-in	90 lb-in



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
CTS95/120N	10
CTS95/120NBU	10
CTS95/120NR	10
CTS95/120NY	10
CTS95/120NBK	10
CTS95/120NGN	10
AUX6	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA202 / CA102	50
CA509/K16WHT	100

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA629/2	269 A	10
CA629/3	269 A	10

### AUX6 (Auxiliary Terminal Block)

In certain power circuits, there is a need to take an extra connection for an Auxiliary circuit like an indicating light or contactor. The AUX6 terminal easily plugs into the terminal and provides this extra connection point.

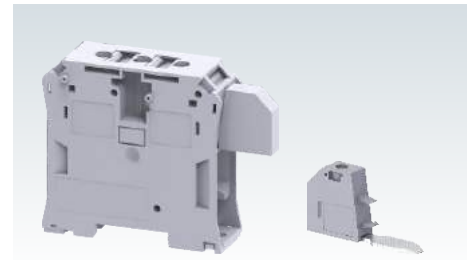

8 x 53.6 x 29.4 mm

0.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG


Width (Thickness) x Length x Height	
With 1 Conductor per clamp	Stranded / Flexible Solid with Ferrule / Lug
With 2 same size Conductors per clamp	Stranded / Flexible with TWIN Ferrule / Lug
Ratings As Per	
Voltage	1000 V
Current	41 A
Torque	0.8 Nm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7
1000 V	600 V	600 V	630 V
41 A	50 A	50 A	36 A
0.8 Nm	14 lb-in	14 lb-in	0.8 Nm

Type / Cat. No.	Standard Pack	Suitable For
Auxiliary Terminal	AUX6	10
Marking Tag	CA509/K8WHT	100




CTS50/70N  
CTS50/70NA  
CTS95/120N

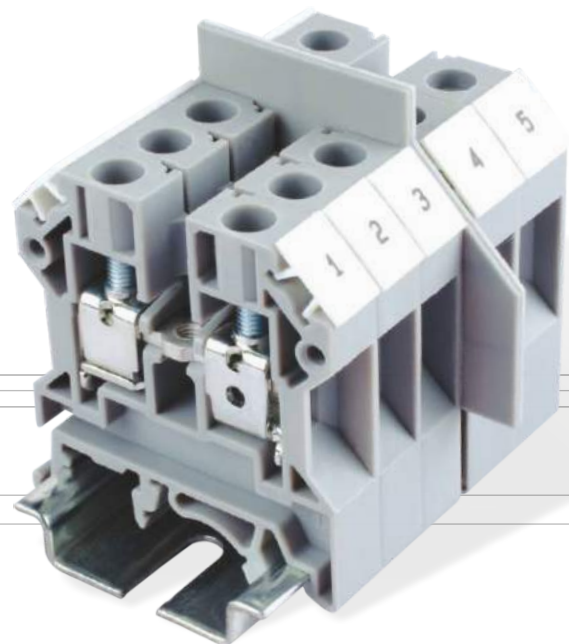


# MULTIPLE CONNECTION TERMINAL BLOCKS





These blocks are used to connect multiple wires in a single Terminal Block, thereby eliminating reliability problems encountered when connecting multiple wires in a single clamp.

CMCG4 ground terminal enables the connection of grounding wires.

The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.


## CMC1-2



Width (Thickness) x Length		6 x 46.5 mm				
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail		49.5 mm / 56.5 mm / 53.3 mm				
Connection Possibility as per		IEC		UL - CSA		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG			
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG			
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG			
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG			
Wire Stripping Length		9 mm				
Ratings As Per		IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7	
Voltage		630 V	600 V	600 V	500 V	
Current		32 A	35 A	35 A	28 A	
Torque		0.5 Nm	7 lb-in	7 lb-in	0.5 Nm	
Approvals						
Insulation Material / Material Group		Polyamide 6,6 / 1				
Rated Impulse Voltage / Pollution Degree		8 KV / 3				
		Type / Cat. No.		Standard Pack		
Terminal Block	Grey	CMC1-2		100		
	Blue	CMC1-2BU		100		
Ground / Earth (Refer Pg. 16 for Details)						
End Plate		EPCMC1-2		50		
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S		50 m		
		CA701-15-1M / CA701-15-1M-S		25 m		
End Clamp (Refer Pg. 220 for details)		CA702 / CA802		50		
Marking Tags (Refer Pg. 224 for details)		CA509/K6WHT		100		
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm		10		
<b>Shorting Links</b>		<b>Uninsulated</b>	<b>Insulated</b>	<b>I<sub>max</sub></b>	<b>Standard Pack</b>	
Pre Assembled Shorting Links		2 pole	CA722/2	CA742/2	32 A	100
		3 pole	CA722/3	CA742/3	32 A	100
		4 pole	CA722/4	CA742/4	32 A	100
		10 pole	CA722/10	CA742/10	32 A	10
		100 pole	CA722/100	CA742/100	32 A	10
Permanent Shorting Links		2 pole	CA703/1		32 A	100
		3 pole	CA704/1		32 A	100
		4 pole	CA705/1		32 A	100
		10 pole	CA732/10		32 A	100
		10 pole (Breakable)	CA732/10-A		32 A	100
		100 pole	CA732/100		32 A	10
Short Sleeve & Screw for Permanent Shorting Links		CA707/S/Q/01		100		
Insulated External Shorting Links		2 pole	CA713/2		30 A	100
		3 pole	CA713/3		30 A	100
		4 pole	CA713/4		30 A	100
		10 pole	CA713/10		30 A	20
Test Socket		CA707/TS/01		100		

\* External Shorting links can be used only in the upper level clamping unit of the Terminal Block.

**CMC2-2**



6 x 65 mm

53.4 mm / 60.5 mm / 58.7 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

9 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

630 V	600 V	600 V	690 V
32 A	35 A	35 A	28 A
0.5 Nm	7 lb-in	7 lb-in	0.5 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CMC2-2	50
CMC2-2BU	50
CMCG4	50
EPCMC2-2	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA722/2	CA742/2	32 A	100
CA722/3	CA742/3	32 A	100
CA722/4	CA742/4	32 A	100
CA722/10	CA742/10	32 A	10
CA722/100	CA742/100	32 A	10
CA703/1		32 A	100
CA704/1		32 A	100
CA705/1		32 A	100
CA732/10		32 A	100
CA732/10-A		32 A	100
CA732/100		32 A	10
CA707/S/Q/01			100
CA713/2		30 A	100
CA713/3		30 A	100
CA713/4		30 A	100
CA713/10		30 A	20
CA707/TS/01			100

**CMCG4**



6 x 65 mm

53.7 mm / 60.9 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

9 mm

IEC60947-7-2 UL-1059 CSA22.2-158

0.5 Nm	4.5 lb-in	4.5 lb-in	
--------	-----------	-----------	--



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CMCG4	50
EPCKT4U/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack

# MULTIPLE LEVEL TERMINAL BLOCKS

These Terminal Blocks are ideal for use in applications requiring high density wiring. In the ODL series Terminal Blocks, the top level is offset from the bottom level by half the thickness of the Terminal Block. In ODL2.5A, ODL4UA the terminals can be interlocked.

In the ODL2.5(I.S) & CDL4UN(I.S) Terminal Blocks, both levels are internally shorted.

The ODLG2.5 & CDLG4 Terminal Block have a feed through functions in the top level and grounding function on the bottom level. These grounding points are appropriately identified by the green-yellow imprint. ODLG2.5(I.S) and CDLG4(I.S) are grounding Terminal Blocks with the same profile of ODL2.5 and CDL4UN Terminal Blocks respectively.


Triple level Terminal Blocks are an ideal choice for control systems where sensor and actuator applications are involved. The simplified 3-level connections tremendously increase wiring density in the circuit.

The top level of the CTL2.5UH Terminal Block provides connection points for signal wires while the middle and bottom level are used for positive and negative potentials. In applications where switching indication is required choice of CTL2.5UL & CTL2.5UHL with built in electronic components is available.

Marking tags in blue and red colour besides the conventional white colour are suggested for effective identification. CTL2.5U(I.S) is internally shorted and CTL2.5UH(I.S)D2 is internally shorted with built in Diode for reverse polarity protection..

CTLG2.5 is a triple level Terminal Block with an additional connection point for earthing cables.

Width (Thickness) x Length	5 x 62 mm		
Height with DIN 35 x 7.5 / 35 x 15	61 mm / 68.5 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	
With 2 same size Conductors per clamp	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	Stranded / Flexible with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
Wire Stripping Length	8 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	800 V	300 V	300 V
Current	24 A	25 A	25 A
Torque	0.4 Nm	4.5 lb-in	4.5 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

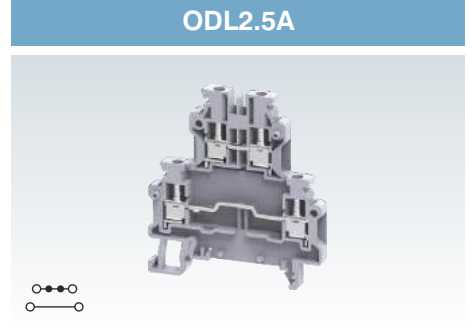


Terminal Block		With Stackable Function
End Plate		Front Side Back Side
Mounting Rail	(Refer Pg. 219 for details)	
End Clamp	(Refer Pg. 220 for details)	
Marking Tags	(Refer Pg. 224 for details)	
Screw Driver		

Type / Cat. No.	Standard Pack
ODL2.5A	50
ODL2.5	50
EPODL2.5	50
EP1ODL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K5WHT	100
SCS0.6/3.5	Blade size: 0.6 x 3.5 mm / 10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack
	JX2.5/2	24 A	100
	JX2.5/3	24 A	50
	JX2.5/4	24 A	50
	JX2.5/5	24 A	50
	JX2.5/6	24 A	10
	JX2.5/7	24 A	10
	JX2.5/8	24 A	10
	JX2.5/10	24 A	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

### ODL2.5A(I.S)



5 x 62 mm

61 mm / 68.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	300 V	300 V
24 A	25 A	25 A
0.4 Nm	4.5 lb-in	4.5 lb-in




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
ODL2.5A(I.S)	50
ODL2.5(I.S)	50
EPODL2.5	50
EP1ODL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K5WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

### ODLG2.5A



5 x 62 mm

61 mm / 68.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	300 V	300 V
24 A	25 A	25 A
0.4 Nm	4.5 lb-in	4.5 lb-in




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
ODLG2.5A	50
ODLG2.5	50
EPODL2.5	50
EP1ODL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K5WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

### ODLG2.5A(I.S)



5 x 62 mm

61 mm / 68.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	300 V	300 V
24 A	25 A	25 A
0.4 Nm	4.5 lb-in	4.5 lb-in



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
ODLG2.5A(I.S)	50
ODLG2.5(I.S)	50
EPODL2.5	50
EP1ODL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K5WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10



**CDL4UN**



**CDL4UN(I.S)**



Width (Thickness) x Length	6 x 57 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	59.5 mm / 67.2 mm / 64.5 mm			
Connection Possibility as per	IEC	UL - CSA		
	With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
		Solid	0.2 - 6.0 mm <sup>2</sup>	
		with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
Wire Stripping Length	9 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7
Voltage	800 V	600 V	600 V	550 V
	Current	32 A	35 A	35 A
Torque	0.5 Nm	7 lb-in	7 lb-in	0.5 Nm

Width (Thickness) x Length	6 x 57 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	59.5 mm / 67.2 mm / 64.5 mm			
Connection Possibility as per	IEC	UL - CSA		
	With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
		Solid	0.2 - 6.0 mm <sup>2</sup>	
		with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
Wire Stripping Length	9 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	
Voltage	800 V	600 V	600 V	
	Current	32 A	35 A	35 A
Torque	0.5 Nm	7 lb-in	7 lb-in	

Approvals



Insulation Material / Material Group

Polyamide 6,6 / 1

Polyamide 6,6 / 1

Rated Impulse Voltage / Pollution Degree

8 KV / 3

8 KV / 3

		Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CDL4UN	100	
	Blue	CDL4UNBU	100	
	Red	CDL4UNR	100	
	Yellow	CDL4UNY	100	
	Black	CDL4UNBK	100	
	Green	CDL4UNGN	100	
	Orange	CDL4UNO	100	
	White	CDL4UNW	100	
	Ground / Earth (Refer Pg. 20 for Details)		CDLG4(I.S)	100
	End Plate		EPCDL4UN	50
Separator Plate		SPCDL4U	100	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m	
		CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)		CA702 / CA802 / CA202	50	
Marking Tags (Refer Pg. 224 for details)		CA509/K6WHT	100	
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	

		Type / Cat. No.	Standard Pack	
Terminal Block		CDL4UN(I.S)	100	
		CDL4UN(I.S)BU	100	
		CDL4UN(I.S)R	100	
		CDL4UN(I.S)Y	100	
		CDL4UN(I.S)BK	100	
		CDL4UN(I.S)GN	100	
		CDL4UN(I.S)O	100	
		CDL4UN(I.S)W	100	
	Ground / Earth (Refer Pg. 20 for Details)		CDLG4(I.S)	100
	End Plate		EPCDL4UN	50
Separator Plate		SPCDL4U	100	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m	
		CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)		CA702 / CA802 / CA202	50	
Marking Tags (Refer Pg. 224 for details)		CA509/K6WHT	100	
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	

Shorting Links




		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	
Pre Assembled Shorting Links		2 pole	CA722/2	CA742/2	32 A	100
		3 pole	CA722/3	CA742/3	32 A	100
		4 pole	CA722/4	CA742/4	32 A	100
		10 pole	CA722/10	CA742/10	32 A	10
		100 pole	CA722/100	CA742/100	32 A	10
Permanent Shorting Links		2 pole	CA703/1		32 A	100
		3 pole	CA704/1		32 A	100
		4 pole	CA705/1		32 A	100
		10 pole	CA732/10		32 A	100
		10 pole (Breakable)	CA732/10-A		32 A	100
Short Sleeve & Screw for Permanent Shorting Links			CA707/S/Q/01		100	
Insulated External Shorting Links		2 pole	CA714/2		32 A	100
		3 pole	CA714/3		32 A	100
		4 pole	CA714/4		32 A	100
		10 pole	CA714/10		32 A	20
	Test Socket			CA707/TS/01		100

		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	
Pre Assembled Shorting Links		2 pole	CA722/2	CA742/2	32 A	100
		3 pole	CA722/3	CA742/3	32 A	100
		4 pole	CA722/4	CA742/4	32 A	100
		10 pole	CA722/10	CA742/10	32 A	10
		100 pole	CA722/100	CA742/100	32 A	10
Permanent Shorting Links		2 pole	CA703/1		32 A	100
		3 pole	CA704/1		32 A	100
		4 pole	CA705/1		32 A	100
		10 pole	CA732/10		32 A	100
		10 pole (Breakable)	CA732/10-A		32 A	100
Short Sleeve & Screw for Permanent Shorting Links			CA707/S/Q/01		100	
Insulated External Shorting Links		2 pole	CA714/2		32 A	100
		3 pole	CA714/3		32 A	100
		4 pole	CA714/4		32 A	100
		10 pole	CA714/10		32 A	20
	Test Socket			CA707/TS/01		100

**CDLG4**

**CDLG4(I.S)**

**ODL4U**



6 x 57 mm  
59.5 mm / 67.2 mm

6 x 57 mm  
59.5 mm / 67.2 mm

6 x 68 mm  
65.0 mm / 71.7 mm / 69.2 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

8 mm  
IEC60947-7-2 UL-1059 CSA22.2-158


8 mm  
IEC60947-7-2 UL-1059 CSA22.2-158

9 mm  
IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

500 V	150 V	150 V
32 A	32 A	30 A
0.5 Nm	4.5 lb-in	4.5 lb-in

0.5 Nm	4.5 lb-in	4.5 lb-in
--------	-----------	-----------

800 V	600 V	600 V	550 V
32 A	35 A	35 A	28 A
0.5 Nm	7 lb-in	7 lb-in	0.5 Nm



Polyamide 6,6 / 1  
6 KV / 3

Polyamide 6,6 / 1  
6 KV / 3

Polyamide 6,6 / 1  
6 KV / 3

Type / Cat. No.	Standard Pack
CDLG4	100

Type / Cat. No.	Standard Pack
CDLG4(I.S) (Green-Yellow)	100

Type / Cat. No.	Standard Pack
ODL4U	50
ODL4UBU	50
ODL4UA (Gray Stackable)	50

EPCDL4UN	50
SPCDL4U	100
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

EPCDL4UN	50
SPCDL4U	100
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

EPODL4U (Front Side)	50
EP1ODL4U (Back Side)	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA722/2	CA742/2	32 A	100
CA722/3	CA742/3	32 A	100
CA722/4	CA742/4	32 A	100
CA722/10	CA742/10	32 A	10
CA722/100	CA742/100	32 A	10
CA703/1		32 A	100
CA704/1		32 A	100
CA705/1		32 A	100
CA732/10		32 A	100
CA732/10-A		32 A	100
CA732/100		32 A	10
CA707/S/Q/01			100
CA714/2		32 A	100
CA714/3		32 A	100
CA714/4		32 A	100
CA714/10		32 A	20
CA707/TS/01			100


Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA722/2	CA742/2	32 A	100
CA722/3	CA742/3	32 A	100
CA722/4	CA742/4	32 A	100
CA722/10	CA742/10	32 A	10
CA722/100	CA742/100	32 A	10
CA703/1		32 A	100
CA704/1		32 A	100
CA705/1		32 A	100
CA732/10		32 A	100
CA732/10-A		32 A	100
CA732/100		32 A	10
CA707/S/Q/01			100
CA714/2		32 A	100
CA714/3		32 A	100
CA714/4		32 A	100
CA714/10		32 A	20
CA707/TS/01			100

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA727/2	CA747/2	32 A	100
CA727/3	CA747/3	32 A	100
CA727/4	CA747/4	32 A	100
CA727/10	CA747/10	32 A	10
CA703/1		32 A	100
CA704/1		32 A	100
CA705/1		32 A	100
CA732/10		32 A	100
CA732/10-A		32 A	100
CA732/100		32 A	10
CA607/S/Q			100
CA714/2		32 A	100
CA714/3		32 A	100
CA714/4		32 A	100
CA714/10		32 A	20
CA707/TS/01			100

**CDLG2.5**



**CTL2.5U**

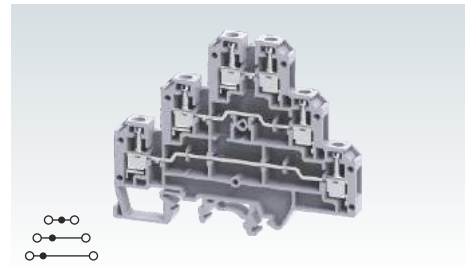

Width (Thickness) x Length	6 x 71.7 mm		6 x 84 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	52.5 mm / 61.0 mm		68.0 mm / 75.6 mm / 73.8 mm			
Connection Possibility as per	IEC	UL - CSA		IEC	UL - CSA	
		With 1 Conductor per clamp	Stranded / Flexible Solid with Ferrule / Lug		24 - 12 AWG 24 - 10 AWG 24 - 12 AWG	0.2 - 2.5 mm <sup>2</sup> 0.2 - 4.0 mm <sup>2</sup> 0.2 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	Stranded / Flexible with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup> 0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG 22 - 16 AWG	0.2 - 1.5 mm <sup>2</sup> 0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG 22 - 14 AWG	
Wire Stripping Length	9 mm		9 mm			
Ratings As Per	IEC60947-7-2	UL-1059	IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7			
Voltage	500 V	300 V	500 V	300 V	300 V	380 V
Current	24 A	24 A	24 A	25 A	25 A	21 A
Torque	0.4 Nm	4.5 lb-in	0.4 Nm	4.5 lb-in	4.5 lb-in	0.4 Nm
Approvals						
Insulation Material / Material Group	Polyamide 6,6 / 1		Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	6 KV / 3		4 KV / 3			

	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	CDLG2.5	100	CTL2.5U CTL2.5UBU	50 50
End Plate	EPCDLG2.5	50	EPCTL2.5U	50
Separator Plate	SPCDLG2.5	100		
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802 / CA202	50	CA702 / CA802 / CA202	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2GWHT	100	CA509/K2WHT	100
Screw Driver	SCS0.5/3 Blade size: 0.5 x 3 mm	10	SCS0.5/3 Blade size: 0.5 x 3 mm	10

	Type / Cat. No.	I <sub>max</sub>	Standard Pack	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links	2 pole CA627/2	24 A	100	2 pole CA722/2	24 A	100
	3 pole CA627/3	24 A	100	3 pole CA722/3	24 A	100
	4 pole CA627/4	24 A	100	4 pole CA722/4	24 A	100
	10 pole CA627/10	24 A	10	10 pole CA722/10	24 A	10
	100 pole CA627/100	24 A	10	100 pole CA722/100	24 A	10
Permanent Shorting Links	2 pole CA703/1	24 A	100	2 pole CA703/1	24 A	100
	3 pole CA704/1	24 A	100	3 pole CA704/1	24 A	100
	4 pole CA705/1	24 A	100	4 pole CA705/1	24 A	100
	10 pole CA732/10	24 A	100	10 pole CA732/10	24 A	100
	10 pole (Breakable) CA732/10-A	24 A	100	10 pole (Breakable) CA732/10-A	24 A	100
Short Sleeve & Screw for Permanent Shorting Links	CA611/S/Q		100	CA707/S/Q/01		100
Insulated External Shorting Links	2 pole CA715/2	24 A	100	2 pole CA715/2	24 A	100
	3 pole CA715/3	24 A	100	3 pole CA715/3	24 A	100
	4 pole CA715/4	24 A	100	4 pole CA715/4	24 A	100
	10 pole CA715/10	24 A	20	10 pole CA715/10	24 A	20
	Test Socket	CA707/TS/01		100	CA707/TS/01	

**CTL2.5UH**



6 x 61 mm

68.0 mm / 75.6 mm / 73.8 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG

9 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

500 V	300 V	300 V	380 V
24 A	25 A	25 A	21 A
0.4 Nm	4.5 lb-in	4.5 lb-in	0.4 Nm



Polyamide 6,6 / 1


4 KV / 3

Type / Cat. No.	Standard Pack
CTL2.5UH	50
CTL2.5UHBU	50
EPCTL2.5UH	50

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K2WHT	100
SCS0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA722/2	24 A	100
CA722/3	24 A	100
CA722/4	24 A	100
CA722/10	24 A	10
CA722/100	24 A	10
CA703/1	24 A	100
CA704/1	24 A	100
CA705/1	24 A	100
CA732/10	24 A	100
CA732/10-A	24 A	100
CA732/100	24 A	10
CA707/S/Q/01		100
CA715/2	24 A	100
CA715/3	24 A	100
CA715/4	24 A	100
CA715/10	24 A	20
CA707/TS/01		100

**CTL2.5U(I.S)**



6 x 84 mm

68.0 mm / 75.6 mm / 73.8 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG

9 mm

IEC60947-7-1 UL-1059 CSA22.2-158

500 V	150 V	150 V
24 A	25 A	25 A
0.4 Nm	4.5 lb-in	4.5 lb-in



Polyamide 6,6 / 1


4 KV / 3

Type / Cat. No.	Standard Pack
CTL2.5U(I.S)	50
EPCTL2.5U	50

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K2WHT	100
SCS0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA722/2	24 A	100
CA722/3	24 A	100
CA722/4	24 A	100
CA722/10	24 A	10
CA722/100	24 A	10
CA703/1	24 A	100
CA704/1	24 A	100
CA705/1	24 A	100
CA732/10	24 A	100
CA732/10-A	24 A	100
CA732/100	24 A	10
CA707/S/Q/01		100
CA715/2	24 A	100
CA715/3	24 A	100
CA715/4	24 A	100
CA715/10	24 A	20
CA707/TS/01		100

**CTL2.5UH(I.S)D2**



6 x 61 mm

68.0 mm / 75.6 mm / 73.8 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG

9 mm

IEC60947-7-1 UL-1059

500 V	150 V
24 A	25 A
0.4 Nm	4.5 lb-in



Polyamide 6,6 / 1


4 KV / 3

Type / Cat. No.	Standard Pack
CTL2.5UH(I.S)D2	50
EPCTL2.5UH	50


CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K2WHT	100
SCS0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA722/2	24 A	100
CA722/3	24 A	100
CA722/4	24 A	100
CA722/10	24 A	10
CA722/100	24 A	10
CA703/1	24 A	100
CA704/1	24 A	100
CA705/1	24 A	100
CA732/10	24 A	100
CA732/10-A	24 A	100
CA732/100	24 A	10
CA707/S/Q/01		100
CA715/2	24 A	100
CA715/3	24 A	100
CA715/4	24 A	100
CA715/10	24 A	20
CA707/TS/01		100

**CTL2.5UL**

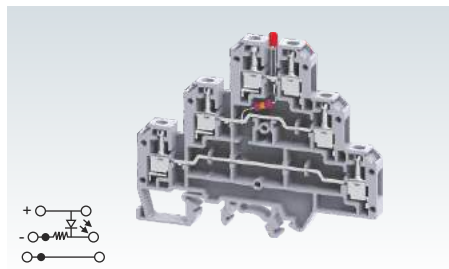

**CTL2.5UHL**

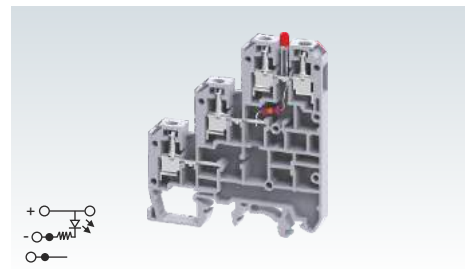

Width (Thickness) x Length	6 x 84 mm			6 x 61 mm				
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	68.0 mm / 75.6 mm / 73.8 mm			68.0 mm / 75.6 mm / 73.8 mm				
Connection Possibility as per	IEC		UL - CSA		IEC		UL - CSA	
	With 1 Conductor per clamp		With 2 same size Conductors per clamp		With 1 Conductor per clamp		With 2 same size Conductors per clamp	
	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG	0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG	0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG	
	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG	0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG	0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG	
Wire Stripping Length	9 mm			9 mm				
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60947-7-1	UL-1059	CSA22.2-158		
Voltage	500 V	300 V	300 V	500 V	300 V	300 V		
Current	24 A	25 A	25 A	24 A	25 A	25 A		
Torque	0.4 Nm	4.5 lb-in	4.5 lb-in	0.4 Nm	4.5 lb-in	4.5 lb-in		
Approvals								
Insulation Material / Material Group	Polyamide 6,6 / 1			Polyamide 6,6 / 1				
Rated Impulse Voltage / Pollution Degree	4 KV / 3			4 KV / 3				

		Type / Cat. No.	Standard Pack			Type / Cat. No.	Standard Pack
Terminal Block	Grey	CTL2.5UL*	50	Terminal Block		CTL2.5UHL*	50
End Plate		EPCTL2.5U	50	End Plate		EPCTL2.5UH	50
Mounting Rail	(Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	Mounting Rail		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m			CA701-15-1M / CA701-15-1M-S	25 m
End Clamp	(Refer Pg. 220 for details)	CA702 / CA802 / CA202	50	End Clamp		CA702 / CA802 / CA202	50
Marking Tags	(Refer Pg. 224 for details)	CA509/K2WHT	100	Marking Tags		CA509/K2WHT	100
Screw Driver		SCS0.5/3 Blade size: 0.5 x 3 mm	10	Screw Driver		SCS0.5/3 Blade size: 0.5 x 3 mm	10

Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack	Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links	2 pole	CA722/2	24 A	100	Pre Assembled Shorting Links	2 pole	CA722/2	24 A	100
	3 pole	CA722/3	24 A	100		3 pole	CA722/3	24 A	100
	4 pole	CA722/4	24 A	100		4 pole	CA722/4	24 A	100
	10 pole	CA722/10	24 A	10		10 pole	CA722/10	24 A	10
	100 pole	CA722/100	24 A	10		100 pole	CA722/100	24 A	10
Permanent Shorting Links	2 pole	CA703/1	24 A	100	Permanent Shorting Links	2 pole	CA703/1	24 A	100
	3 pole	CA704/1	24 A	100		3 pole	CA704/1	24 A	100
	4 pole	CA705/1	24 A	100		4 pole	CA705/1	24 A	100
	10 pole	CA732/10	24 A	100		10 pole	CA732/10	24 A	100
	10 pole (Breakable)	CA732/10-A	24 A	100		10 pole (Breakable)	CA732/10-A	24 A	100
100 pole	CA732/100	24 A	10	100 pole	CA732/100	24 A	10		
Short Sleeve & Screw for Permanent Shorting Links		CA707/S/Q/01		100	Short Sleeve & Screw for Permanent Shorting Links		CA707/S/Q/01		100
Insulated External Shorting Links	2 pole	CA715/2	24 A	100	Insulated External Shorting Links	2 pole	CA715/2	24 A	100
	3 pole	CA715/3	24 A	100		3 pole	CA715/3	24 A	100
	4 pole	CA715/4	24 A	100		4 pole	CA715/4	24 A	100
	10 pole	CA715/10	24 A	20		10 pole	CA715/10	24 A	20
	Test Socket		CA707/TS/01			100	Test Socket		CA707/TS/01

\* Standard voltage for "LED Indication" is 12 V D.C. Other variations in voltage is available on request. Add required voltage to Type / Cat. No. as suffix e.g. CTL2.5UL24 for 24V D.C.

## CTLG2.5



6 x 87.5 mm

66.0 mm / 74.0 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG

9 mm

IEC60947-7-1 UL-1059

440 V	300 V		
24 A	24 A		
0.4 Nm	4.5 lb-in		





Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CTLG2.5	50
EPCTLG2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K2GWHT	100
SCS0,5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA627/2	24 A	100
CA627/3	24 A	100
CA627/4	24 A	100
CA627/10	24 A	10
CA703/1	24 A	100
CA704/1	24 A	100
CA705/1	24 A	100
CA732/10	24 A	100
CA732/10-A	24 A	100
CA732/100	24 A	10

CA611/S/Q		100
CA715/2	24 A	100
CA715/3	24 A	100
CA715/4	24 A	100
CA715/10	24 A	20
CA707/TS/01		100

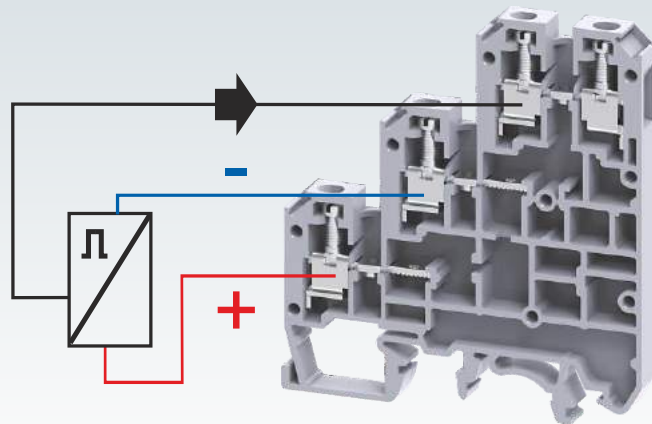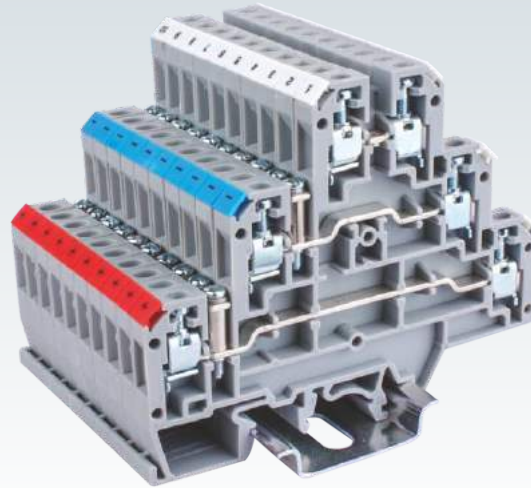

# GROUND / EARTH TERMINAL BLOCKS

These blocks are used for terminating Grounding / Earthing wires. They are green-yellow colour coded as per industry standards.


CGT4N, CGT6N & CGT10N terminals can be mounted only on the DIN 35 & DIN 35-15 Rails. They have the same top profile as their respective feed through Terminal Blocks.






CGT4U can be mounted on the DIN 35 and DIN 32 rails.

CGT16N terminals can be mounted only on the DIN 35 & DIN 35-15 Rails. They have the same top profile as their respective feed through Terminal Blocks.

CGT10U & CGT35U can be mounted on the DIN 35 and DIN 32 rails.

CGMT4 is suitable for DIN 15 micro rail & can be used in conjunction with CMT4 (Pg - 67) Terminal Blocks.

The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.

Width (Thickness) x Length		6 x 54.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail		47.0 mm / 54.4 mm	
Connection Possibility as per		<b>IEC</b>	<b>UL - CSA</b>
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	Solid	0.2 - 6.0 mm <sup>2</sup>	
with Ferrule / Lug		0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length		8 mm	
Ratings As Per		IEC60947-2	UL-1059 CSA22.2-158 IEC 60079-7
Torque		0.5 Nm	7 lb-in 7 lb-in 0.5 Nm
Torque at Center Screw		0.8 Nm	7 lb-in 7 lb-in
Approvals			
Insulation Material / Material Group		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	
		<b>Type / Cat. No.</b>	<b>Standard Pack</b>
Terminal Block		CGT4N	50
End Plate 			
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
Marking Tags (Refer Pg. 224 for details)		CA509/K6WHT	100
Screw Driver 		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

## CGT4N



### CGT4U



6 x 43 mm  
49.5 mm / 56.7 mm / 54.3 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

8 mm  
IEC60947-7-2 UL-1059 CSA22.2-158 IEC 60079-7

0.5 Nm	7 lb-in	7 lb-in	0.5 Nm
0.8 Nm	7 lb-in	7 lb-in	



Polyamide 6,6 / 1

8 KV / 3

### CGT6N



8 x 54.5 mm  
48.2 mm / 55.8 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

9 mm  
IEC60947-7-2 UL-1059 CSA22.2-158 IEC 60079-7


1.6 Nm	14 lb-in	14 lb-in	0.8 Nm
0.8 Nm	7 lb-in	7 lb-in	



Polyamide 6,6 / 1

8 KV / 3

### CGT10N



10 x 55 mm  
48.5 mm / 56.0 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	16 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	
0.2 - 10.0 mm <sup>2</sup>	16 - 6 AWG
0.2 - 6.0 mm <sup>2</sup>	16 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	16 - 10 AWG

11 mm  
IEC60947-7-2 UL-1059 CSA22.2-158 IEC 60079-7

1.6 Nm	14 lb-in	14 lb-in	1.2 Nm
1.6 Nm	14 lb-in	14 lb-in	




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CGT4U	50
EPCGT4UY	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA501-1M / CA501-1M-S	50 m
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	Standard Pack
CGT6N	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	Standard Pack
CGT10N	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K10WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

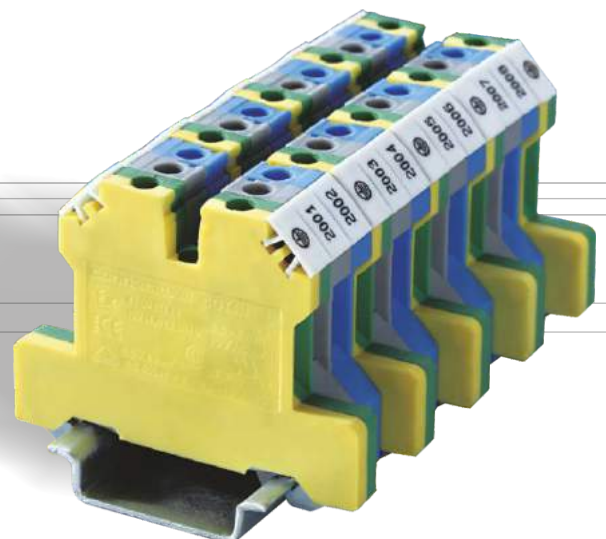



# GROUND / EARTH TERMINAL BLOCKS

## CGT10U



## CGT16N



Width (Thickness) x Length	10 x 45 mm				12 x 55 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	51.0 mm / 58.2 mm / 55.7 mm				48.5 mm / 56.0 mm			
Connection Possibility as per	IEC		UL - CSA		IEC		UL - CSA	
	0.2 - 10.0 mm <sup>2</sup>		16 - 8 AWG		0.2 - 16.0 mm <sup>2</sup>		20 - 4 AWG	
With 1 Conductor per clamp	Stranded / Flexible		16 - 8 AWG		0.2 - 16.0 mm <sup>2</sup>		20 - 4 AWG	
	Solid with Ferrule / Lug		16 - 8 AWG		0.2 - 10.0 mm <sup>2</sup>		20 - 6 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible		16 - 10 AWG		0.2 - 10.0 mm <sup>2</sup>		20 - 6 AWG	
	with TWIN Ferrule / Lug		16 - 10 AWG		0.2 - 10.0 mm <sup>2</sup>		20 - 6 AWG	
Wire Stripping Length	11 mm				12 mm			
Ratings As Per	IEC60947-7-2	UL-1059	CSA22.2-158	IEC 60079-7	IEC60947-7-2	UL-1059	CSA22.2-158	IEC 60079-7
Torque	1.6 Nm	14 lb-in	14 lb-in	1.2 Nm	1.6 Nm	14 lb-in	14 lb-in	2.0 Nm
Torque at Center Screw	0.5 Nm	4.5 lb-in	4.5 lb-in		1.6 Nm	14 lb-in	14 lb-in	
Approvals								
Insulation Material / Material Group	Polyamide 6,6 / 1				Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3				8 KV / 3			

	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	CGT10U	50	CGT16N	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m
	CA501-1M / CA501-1M-S	50 m		
Marking Tags (Refer Pg. 224 for details)	CA509/K10WHT	100	CA509/K12WHT	100
Screw Driver	SCS0.8/4 Blade size: 0.8 x 4 mm	10	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

### CGT35U



16 x 58 mm  
63.2 mm / 70.5 mm / 68.0 mm

IEC	UL - CSA
2.5 - 35.0 mm <sup>2</sup>	8 - 2 AWG
2.5 - 35.0 mm <sup>2</sup>	8 - 2 AWG
2.5 - 25.0 mm <sup>2</sup>	8 - 4 AWG

15 mm

IEC60947-7-2 UL-1059 CSA22.2-158 IEC 60079-7

2.8 Nm	25 lb-in	25 lb-in	2.5 Nm
1.2 Nm	10 lb-in	10 lb-in	



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CGT35U	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA501-1M / CA501-1M-S	50 m
CA509/K16WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

### CGT50/70N




20 x 77 mm  
71.1 mm / 78.1 mm

IEC	UL - CSA
10.0 - 70.0 mm <sup>2</sup>	8 - 2 AWG
10.0 - 70.0 mm <sup>2</sup>	8 - 2 AWG
10.0 - 35.0 mm <sup>2</sup>	8 - 2 AWG

22 mm

IEC60947-7-2 UL-1059 CSA22.2-158

3.0 Nm	38 lb-in	38 lb-in
1.2 Nm	10 lb-in	10 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CGT50/70N	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K16WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

### CGMT4



For DIN 15 Rail only

6 x 27 mm  
30.7 mm (Height with DIN 15 Rail only)

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

8 mm

IEC60947-7-2 UL-1059 CSA22.2-158 IEC 60079-7


0.8 Nm	7 lb-in	7 lb-in	0.5 Nm
0.4 Nm	3.6 lb-in	3.6 lb-in	



Polyamide 6,6 / 1

4 KV / 3

Type / Cat. No.	Standard Pack
CGMT4	100
CA601	50 m
CA509/K2WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

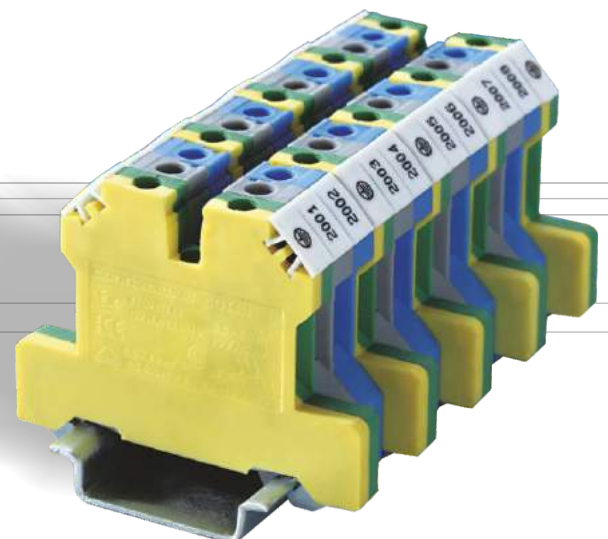

# NEUTRAL / EARTH CLAMPS

The CENC series clamps are a flexible solution for terminating neutral and grounding wires on bus bar.

The NEB10 (10 x 3mm) and NEB6 (6 x 6mm) bus bar can either be panel mounted using Plastic supports NES or Din rail mounted using the end clamp CA202.

## CENC4



Width (Thickness) x Length	7.5 x 23.3 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail				
Connection Possibility as per	IEC	UL - CSA		
With 1 Conductor per clamp	Stranded / Flexible	10.0 mm <sup>2</sup>	22 - 12 AWG	
	Solid with Ferrule / Lug	10.0 mm <sup>2</sup>	22 - 10 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible	4.0 mm <sup>2</sup>	22 - 14 AWG	
	with TWIN Ferrule / Lug	4.0 mm <sup>2</sup>	22 - 14 AWG	
Wire Stripping Length	12 mm			
Ratings As Per	IEC60947-2	UL-1059	CSA22.2-158	
Voltage	800 V			
Current	57 A			
Torque	0.8 Nm	14 lb-in	14 lb-in	
Approvals				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3			
	<b>Type / Cat. No.</b>	<b>Standard Pack</b>		
Terminal Block	Green	CENC4	50	
	Blue	CENC4BU	50	
	Black	CENC4BK	50	
	Grey	CENC4G	50	
Bus Bar 6 (H) x 6 (W) mm		NEB6	I <sub>max</sub> : 140 A	10
Bus Bar 10(H) x 3 (W) mm		NEB10	I <sub>max</sub> : 120 A	10
Plastic support with fixing screw		NES		50
Bus Bar Support for DIN 35 Rail Mounting		CA202		50
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT		100
Screw Driver		SCS0.8/4	Blade size: 0.8 x 4 mm	10

Note:  
The current carrying capacity of the busbar (140A) should be taken into account while connecting loads.

## PANEL & RAIL MOUNTING ASSEMBLY OF CENC CLAMPS



### CENC16



9.8 x 23.3 mm

### CENC35



14.5 x 27.3 mm

IEC	UL - CSA
10.0 - 16.0 mm <sup>2</sup>	10 - 6 AWG
10.0 - 16.0 mm <sup>2</sup>	10 - 6 AWG
6.0 - 10.0 mm <sup>2</sup>	10 - 4 AWG
6.0 - 10.0 mm <sup>2</sup>	10 - 4 AWG

16 mm

IEC60947-7-2 UL-1059 CSA22.2-158

800 V

76 A

2.0 Nm 17.5 lb-in 14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CENC16	50
CENC16BU	50
CENC16BK	50
CENC16G	50

NEB6	Imax.: 140 A	10
NEB10	Imax.: 120 A	10

NES 50

CA202 50

CA509/K6WHT 100

SCS1.0/5.5 Blade size: 1.0 x 5.5 mm 10

IEC	UL - CSA
10.0 - 35.0 mm <sup>2</sup>	8 - 2 AWG
10.0 - 35.0 mm <sup>2</sup>	8 - 2 AWG
10.0 - 25.0 mm <sup>2</sup>	8 - 4 AWG
10.0 - 25.0 mm <sup>2</sup>	8 - 4 AWG

16 mm

IEC60947-7-2 UL-1059 CSA22.2-158

800 V

125 A

2.5 Nm 25 lb-in 25 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CENC35	50
CENC35BU	50
CENC35BK	50
CENC35G	50


NEB6	Imax.: 140 A	10
NEB10	Imax.: 120 A	10

NES 50

CA202 50


CA509/K6WHT 100

SCS1.0/5.5 Blade size: 1.0 x 5.5 mm 10

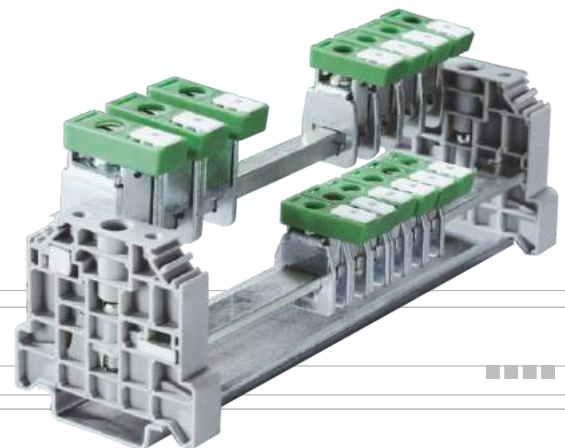

# SCREW TYPE SHIELD CONNECTION CLAMPS

The screw type Shield connection clamps are with Knurled Screw and suitable for mounting on 10 x 3 mm Busbar. These clamps can be easily used with the holder NES or NESCC.

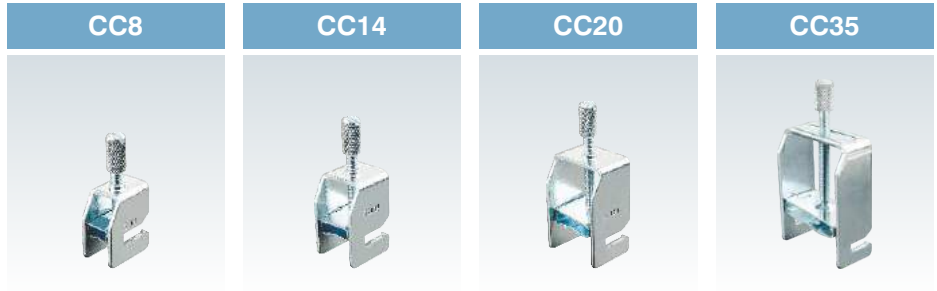

Type of Mounting







Bus bar mounting screw type shield connectors

Shield connection clamps for Busbar 10 X 3 mm	
Ø8 mm, tightening torque 0.6 Nm	
Ø14 mm, tightening torque 0.8 Nm	
Ø20 mm, tightening torque 0.8 Nm	
Ø35 mm, tightening torque 1.5 Nm	

Type / Cat. No.	Standard Pack
CC8	10
CC14	10
CC20	10
CC35	10

Busbar 10(H) X 3(W) mm	NEB10	I <sub>max</sub> : 120A	10
Mounting Support (Panel Mount)	NES		50
Mounting Support (Din 35 Rail Mounting)	NESCC		20

Busbar 10(H) X 3(W) mm	NEB10	I <sub>max</sub> : 120A	10
Mounting Support (Panel Mount)	NES		50
Mounting Support (Din 35 Rail Mounting)	NESCC		20

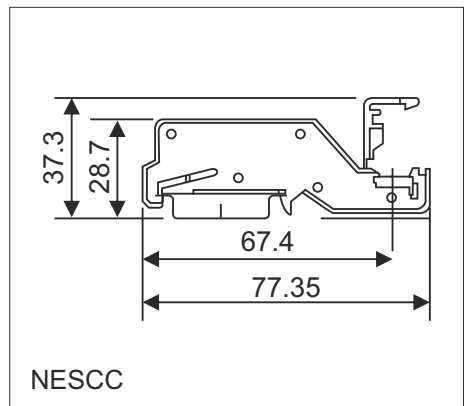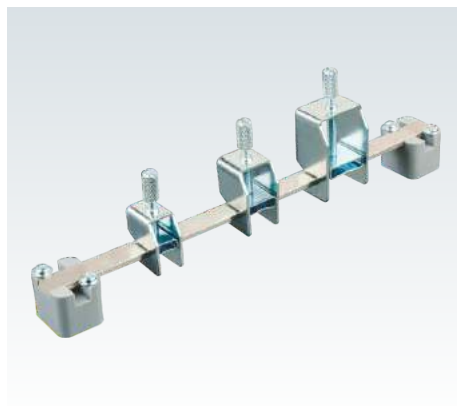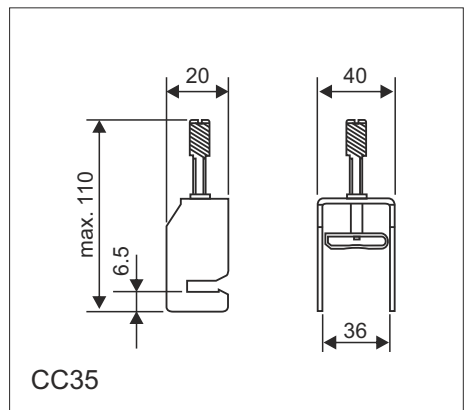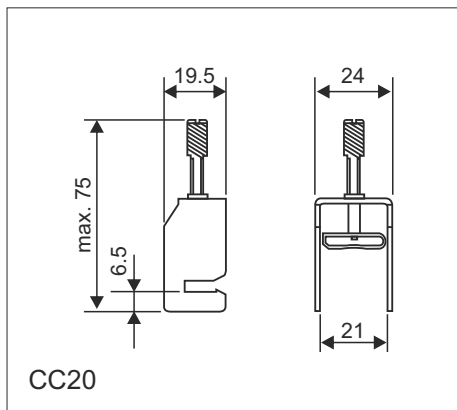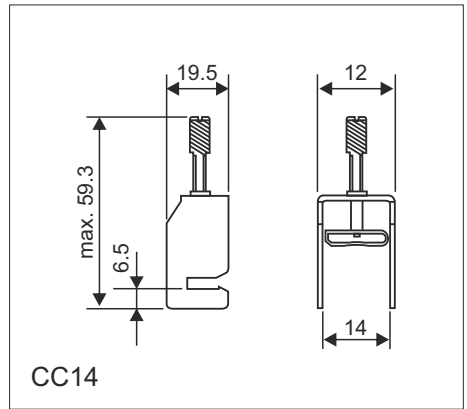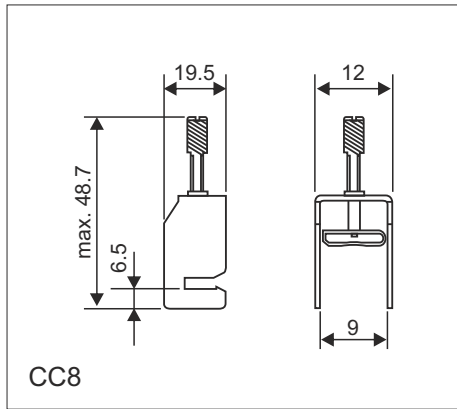

# SPRING TYPE SHIELD CONNECTION CLAMPS



The electromagnetic compatibility of electrical machines and installations has become a very important aspect, our Spring shield connection clamps CCS series offer wide range for cable and conductors from diameters 2 to 32 mm.



Type of Mounting Bus bar mounting spring type shield connectors

Shield connection clamps for Busbar 10 X 3 mm		Type / Cat. No.	Standard Pack
	Ø 2 - 6 mm	CCS2X2-6	10
	Ø 3 - 8 mm	CCS3-8	10
	Ø 4 - 13.5 mm	CCS4 -13.5	10
	Ø 10 - 20 mm	CCS10-20	10
	Ø 15 - 32 mm	CCS15-32	10
Busbar 10(H) X 3(W) mm		NEB10 I <sub>max</sub> : 120A	10
Mounting Support (Panel Mount)		NES	50
Mounting Support (Din 35 Rail Mounting)		NESCC	20

Part No.	A	B	C
CCS 2X2 - 6	24	15	18.20
CCS 3 - 8	25.50	13.6	18.30
CCS 4 - 13.5	31	19.10	19.70
CCS 10 - 20	38.70	24.60	26.10
CCS 15 - 32	62.20	37.60	32.00

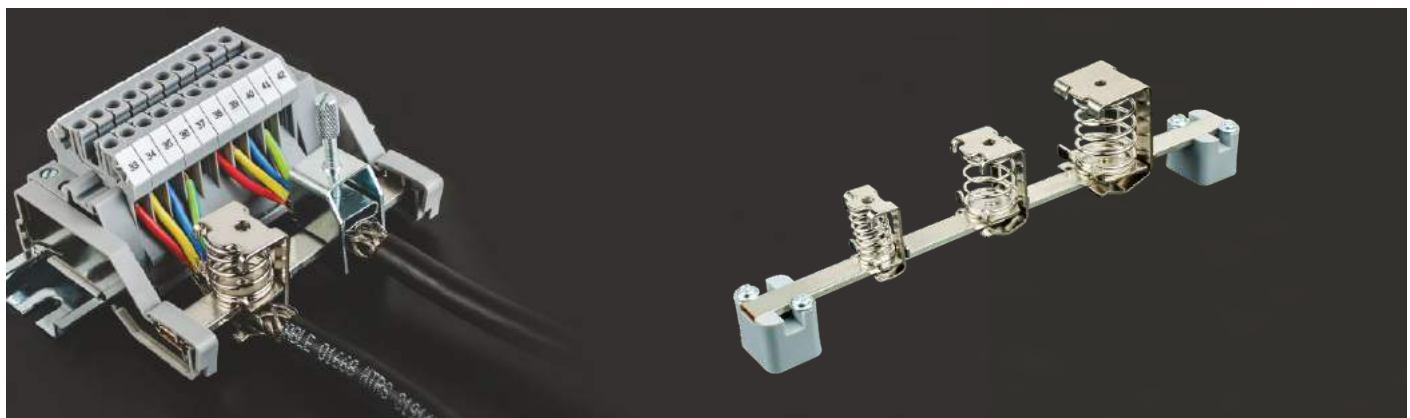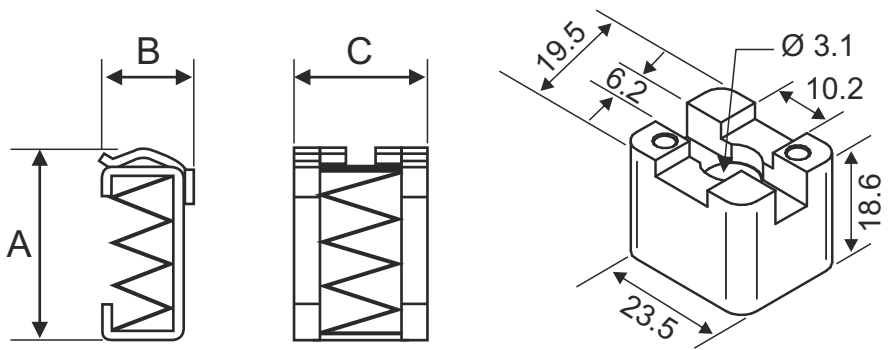

# FUSE TERMINAL BLOCKS

These Terminal Blocks are used in electrical and control systems which require fuse protection.

The CF4U series Terminal Blocks accepts industry standard Ø5 x 20mm and Ø5 x 25 mm glass cartridge fuses. These are 8 mm thick Terminal Blocks with a provision to hold a spare fuse (In the non LED version).

CF4SP series fuse terminals, have a thickness of 6 mm with a provision for using internal shorting links. These terminals can be used in an alternating configuration with CTS2.5UN, CTS2.5UE, CTS4UN and CF4SPFT feed through terminals.


CYF4 series fuse terminals have a thickness of 6 mm with a provision for using push in shorting links. These terminals are completely closed and do not need a separate end plate.

CF4UL, CF4SPL & CYF4L series terminals have a built in LED circuit which gives an offline indication in case of a fuse blow out.

The CAFL series terminals accept Ø¼" x 1" and Ø¼" x 1¼" (Ø6.3 x 32 mm) fuses. Fuse blocks with suffix (L), (N) are used for off-line indication in case of a fuse blow out.


These blocks can be used with AC & DC voltages.

## CF4U



Width (Thickness) x Length	8 x 57 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	50.3 mm / 57.6 mm / 56.5 mm		
Connection Possibility as per	IEC		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	
	Solid	0.2 - 6.0 mm <sup>2</sup>	
With 2 same size Conductors per clamp	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	
	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	
with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>		22 - 12 AWG
Wire Stripping Length	9.5 mm		
Ratings As Per	IEC60947-7-3	UL-1059	CSA22.2-158
Voltage	800 V	600 V	600 V
Current	6.3 A	10 A	10 A
Torque	0.5 Nm	7 lb-in	7 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		
Fuse Size	Ø5 x 20, Ø5 x 25 mm		

Type / Cat. No.	Standard Pack
CF4U	100
CF4UBU	100
CF4UBK	100
CF4UL6-60V	100
CF4UL110-240V	100
End Plate	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S 50 m CA701-15-1M / CA701-15-1M-S 25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802 50
Marking Tags	CA509/K8WHT 100 CA509/K6WHT 100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm 10

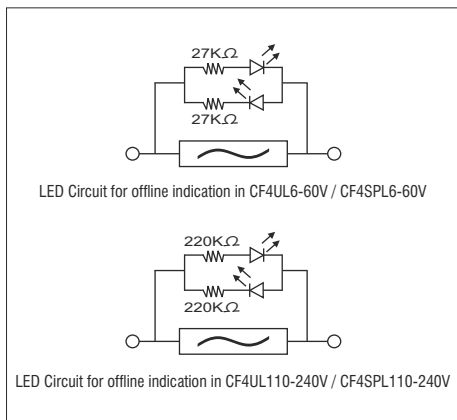

Shorting Links	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links				
				2 pole
				3 pole
				4 pole
				10 pole
				100 pole
Insulated External Shorting Links				2 pole
				3 pole
				4 pole
				10 pole
		CA711/2	32 A	100
		CA711/3	32 A	50
		CA711/4	32 A	50
		CA711/10	32 A	20






# DOUBLE LEVEL FUSE TERMINAL BLOCKS

These blocks have a fuse carrier link on the top level and a separate feed through terminal connection at the lower level. This eliminates the use of additional feed through Terminal Blocks.

DDFL4U(E) terminals have a specially designed built in circuit which gives light indication in the event of a fuse blow out at the top level.

DDFL4ULR is a modified version of the DDFL4U Terminal Block where two equi-potential connection points are available on both sides of the Terminal Block.

## DDFL4U

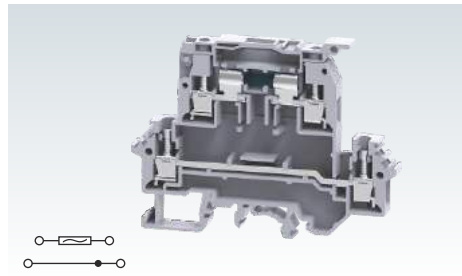


Width (Thickness) x Length		8 x 88 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail		67.4 mm / 74.3 mm / 71.4 mm		
Connection Possibility as per		IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>		
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
Wire Stripping Length		9.5 mm		
Ratings As Per		IEC60947-7-3	UL-1059	CSA22.2-158
Voltage	Top Level	800 V	600 V	600 V
	Bottom Level			
Current	Top Level	6.3 A	6.3 A	6.3 A
	Bottom Level	32 A	35 A	35 A
Torque		0.5 Nm	7 lb-in	7 lb-in
Approvals				
Insulation Material / Material Group		Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree		8 KV / 3		
Fuse Size		Ø5 x 20, Ø5 x 25 mm		

		Type / Cat. No.	Standard Pack
Terminal Block	Grey	DDFL4UW/F	20
	With LED for 6 - 60 V AC/DC	DDFL4UE6-60V	20
	With LED for 110 - 240 V AC/DC	DDFL4UE110-240V	20
	With LED for 24 V AC/DC	DDFL4UE24V	20
	With LED for 48 V AC/DC	DDFL4UE48V	20
	With LED for 110 V AC/DC	DDFL4UE110V	20
	With LED for 220 V AC/DC	DDFL4UE220V	20
	With LED for 440 V AC	DDFL4UE440V	20
End Plate		EPDDFL4U	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA702 / CA802 / CA202	50
Marking Tags	On Terminal	CA509/K8WHT	100
	Continuous Tag	CA509/K2WHT	100
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Shorting Links		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links		CA729/2	CA749/2	32 A	100
		CA729/3	CA749/3	32 A	50
		CA729/4	CA749/4	32 A	50
		CA729/10	CA749/10	32 A	10
Insulated External Shorting Links			CA711/2	32 A	100
			CA711/3	32 A	50
			CA711/4	32 A	50
			CA711/10	32 A	20

## DDFL4ULR

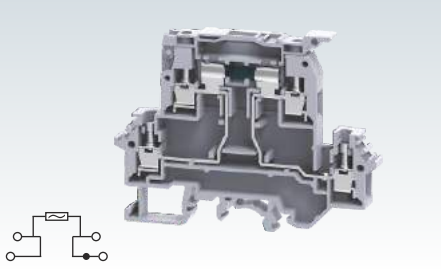

8 x 88 mm

67.4 mm / 74.3 mm / 71.4 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

9.5 mm

IEC60947-7-3	UL-1059	CSA22.2-158
800 V	600 V	600 V
6.3 A	6.3 A	6.3 A

0.5 Nm	7 lb-in	7 lb-in
--------	---------	---------



Polyamide 6,6 / 1

8 KV / 3

Ø5 x 20, Ø5 x 25 mm

Type / Cat. No.	Standard Pack
DDFL4ULRW/F	20
DDFL4UELR24V	20
DDFL4UELR48V	20
DDFL4UELR110V	20
DDFL4UELR220V	20
DDFL4UELR440V	20
EPDDFL4U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K8WHT	100
CA509/K2WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA729/2	CA749/2	32 A	100
CA729/3	CA749/3	32 A	50
CA729/4	CA749/4	32 A	50
CA729/10	CA749/10	32 A	10
CA711/2		32 A	100
CA711/3		32 A	50
CA711/4		32 A	50
CA711/10		32 A	20

# DISCONNECT & TEST TERMINAL BLOCKS

These blocks are used for measuring, control and regulatory circuits.

In CKT4U & CKT4U/4 Disconnection is achieved by lifting a lever which operates the knife contact.

Specially designed socket headed screws act as test monitoring points in these Terminal Blocks.

CKT4U/S is another version of CKT4U Terminal Block in which regular slotted screws are used.


CKT4SP terminal provides a possibility of using an internal shorting link for cross connection.

CF4SPFT feed through terminals have the same profile as that of the CF4SP and CKT4SP Terminal Block.

CF4SP & CKT4SP series terminal are completely closed and do not need a separate end plate.

CKT4UH & CKT6U terminals have an extended tab on the disconnecting blade.

## CKT4U

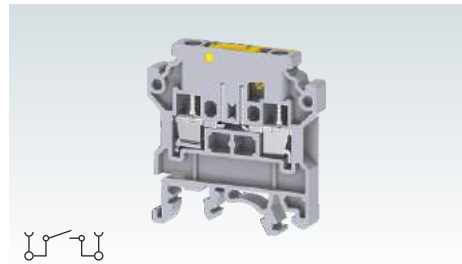

Width (Thickness) x Length	6 x 46.3 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	48.3 mm / 56.0 mm / 54.5 mm		
Connection Possibility as per	IEC		UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	Solid	0.2 - 6.0 mm <sup>2</sup>	
With 2 same size Conductors per clamp	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	8 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	800 V	600 V	600 V
Current	28 A	35 A	16 A
Torque	0.5 Nm	7 lb-in	7 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

		Type / Cat. No.	Standard Pack
Terminal Block	With Socket Headed Screw - Grey	CKT4U	50
	With Socket Headed Screw - Blue	CKT4UBU	50
	With Standard Slotted Screw	CKT4U/S	50
	Disconnecting knife with Pull Tale	CKT4UH	50
End Plate		EPCKT4U	50
Mounting Rail	(Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp	(Refer Pg. 220 for details)	CA702 / CA802	50
Marking Tags	(Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Shorting Links		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links					
	2 pole				
	3 pole				
	4 pole				
	10 pole				
Permanent Shorting Links					
	2 pole				
	3 pole				
	4 pole				
	10 pole				
Short Sleeve & Screw for Permanent Shorting Links					
	2 pole				
	3 pole				
	4 pole				
	10 pole				
Insulated External Shorting Links					
	2 pole	CA714/2		28 A	100
	3 pole	CA714/3		28 A	100
	4 pole	CA714/4		28 A	100
	10 pole	CA714/10		28 A	20




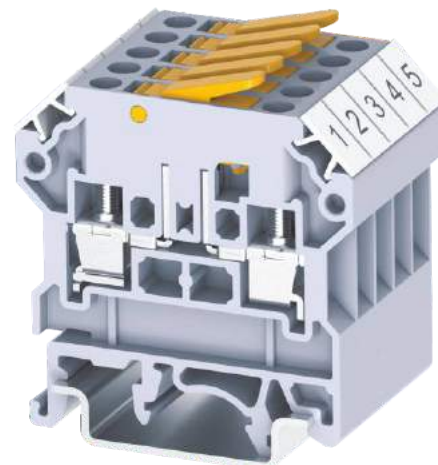
**CKT6U**



Width (Thickness) x Length	8 x 42.5 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	51.2 mm / 58.7 mm / 56.1 mm		
Connection Possibility as per	<b>IEC</b>	<b>UL - CSA</b>	
With 1 Conductor per clamp	Stranded / Flexible	0.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
	Solid		
With 2 same size Conductors per clamp	with Ferrule / Lug	0.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
	Stranded / Flexible with TWIN Ferrule / Lug	0.5 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	8 mm		
Ratings As Per	IEC60947-7-1		
Voltage	1000 V		
Current	41 A		
Torque	0.8 Nm		
Approvals	<b>CE</b>		
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

	Type / Cat. No.	Standard Pack
Terminal Block	CKT6U CKT6UBU	50 50
End Plate	EP6/10U	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50
Marking Tags (Refer Pg. 224 for details)	CA509/K8WHT	100
Screw Driver	SCS0.8/4 Blade size: 0.8 x 4 mm	10

Shorting Links	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Insulated External Shorting Links 	2 pole	CA710/2	41 A	100
	3 pole	CA710/3	41 A	50
	4 pole	CA710/4	41 A	50
	10 pole	CA710/10	41 A	20



# CERTIFICATIONS & APPROVALS



is an ISO 9001:2008 Company with products and systems approved by various credible third party organizations



Cert. No.: 44 100 990789/01-E3  
TUV NORD



VDE Testing & Certification Institute



Underwriters Laboratories Inc



Canadian Standards Association



Installation instruction refer page 175-178



(IECEE) CB Scheme



(IECEE) CE Scheme



STQC Certification Services



# DISCONNECT & TEST TERMINAL BLOCKS


These blocks are used for measuring, control and regulatory circuits. They provide a clear functional advantage for devices having utility instruments and associated transformers.

In CDTTU & CDTTUSH disconnection is achieved by means of a slide link operated with a screw driver.

Specially designed socket headed screws act as test monitoring points in Disconnecting & Test Terminal Blocks.


CDTTUFT is a standard feed through terminal with the same profile as that of CDTTU.

## CDTTU



Width (Thickness) x Length		8 x 63 mm				
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail		58.7 mm / 65.7 mm / 63.7 mm				
Connection Possibility as per		IEC		UL - CSA		
With 1 Conductor per clamp	Stranded / Flexible	1.5 - 10.0 mm <sup>2</sup>		16 - 8 AWG		
	Solid with Ferrule / Lug	1.5 - 10.0 mm <sup>2</sup>		16 - 8 AWG		
With 2 same size Conductors per clamp	Stranded / Flexible	1.5 - 4.0 mm <sup>2</sup>		16 - 10 AWG		
	with TWIN Ferrule / Lug	1.5 - 4.0 mm <sup>2</sup>		16 - 10 AWG		
Wire Stripping Length		12 mm				
Ratings As Per		IEC60947-7-1 UL-1059 CSA22.2-158				
Voltage		800 V	600 V	600 V		
Current		57 A	41 A	41 A		
Torque		1.2 Nm	14 lb-in	14 lb-in		
Approvals						
Insulation Material / Material Group		Polyamide 6,6 / 1				
Rated Impulse Voltage / Pollution Degree		8 KV / 3				
		Type / Cat. No.		Standard Pack		
Terminal Block	Grey Blue	CDTTU		50		
		CDTTUBU		50		
End Plate		EPCDTTU		50		
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S		50 m		
		CA701-15-1M / CA701-15-1M-S		25 m		
End Clamp (Refer Pg. 220 for details)		CA702 / CA802		50		
Marking Tags (Refer Pg. 224 for details)		CA509/K8WHT		100		
Screw Driver		SCS1.0/5.5 Blade size: 1.0 x 5.5 mm		10		
Shorting Links		Type / Cat. No.		Imax	Standard Pack	
Insulated External Shorting Links		2 pole		CA710/2	35 A	100
		3 pole		CA710/3	35 A	50
		4 pole		CA710/4	35 A	50
		10 pole		CA710/10	35 A	20
Shorting Plug		2 pole		QJ8/2		25

### CDTTUSH



16 x 63 mm

58.7 mm / 65.7 mm / 63.7 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG

12 mm

IEC60947-7-1 UL-1059 CSA22.2-158

160 V	300 V	300 V
10 A	25 A	25 A
1.2 Nm	14 lb-in	14 lb-in




Polyamide 6,6 / 1

2.5 KV / 3

Type / Cat. No.	Standard Pack
CDTTUSH	20
EPCDTTU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA710/2	35 A	100
CA710/3	35 A	50
CA710/4	35 A	50
CA710/10	35 A	20
QJ8/2		25

### CDTTUFT



8 x 63 mm

58.7 mm / 65.7 mm / 63.7 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG

12 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
57 A	41 A	41 A
1.2 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CDTTUFT	50
CDTTUFTBU	50
EPCDTTU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA710/2	35 A	100
CA710/3	35 A	50
CA710/4	35 A	50
CA710/10	35 A	20
QJ8/2		25



# DISCONNECT & TEST TERMINAL BLOCKS

The CDS6U Disconnect & Test Terminal Block is used for measuring, control and regulatory circuits. They provide a clear functional advantage for devices having utility instruments and associated transformers.

Separate testing points facilitate insertion of test probes. Disconnection is achieved by means of a slide link operated with a Screw Driver.


In the CDS6U/TS, the insulated test point screw system (TPSLS) is integrated.

CDS6U/FT Terminal Block is a standard feed through Terminal Block.

In the CDS6U/SC Disconnect & Test Terminal Block, an additional safety spring is provided underneath the screw clamp. These Terminal Blocks are preferred for connections that involve safety requirements of the Electric Supply Industry (ESI) standards, British CEGB regulations and NTPC applications.

The SLS2 and SLS4 slide shorting link can be used in combination with either the supplied screw or the TPSLS Test point screw system.

Lock out cap LCCDS can be used to lock the center shorting screw, to prevent accidental opening of circuits.

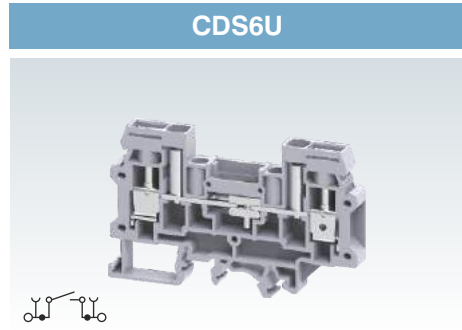


Width (Thickness) x Length	8 x 82 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	51.0 mm / 59.2 mm / 56.7 mm		
Connection Possibility as per	IEC		UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	with TWIN Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
Wire Stripping Length	10 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	800 V	600 V	600 V
Current	41 A	45 A	45 A
Torque	0.8 Nm	14 lb-in	14 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey Blue	CDS6U CDS6UBU	50 50
End Plate		EPCDS6U	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)		CA702 / CA802	50
Marking Tags (Refer Pg. 224 for details)		CA509/K8WHT	100
Screw Driver		SCS0.8/4 Blade size: 0.8 x 4 mm	10

	Type / Cat. No.	Imax	Standard Pack		
Pre Assembled Shorting Links		2 pole	CA723/2	41 A	100
		3 pole	CA723/3	41 A	50
		4 pole	CA723/4	41 A	50
		5 pole	CA723/5	41 A	50
		6 pole	CA723/6	41 A	10
		10 pole	CA723/10	41 A	10
Slide Shorting Link		2 Pole	SLS2	35 A	50
		3 Pole	SLS3	35 A	25
		4 Pole	SLS4	35 A	25
Insulated Test Socket		Grey	TPSLS		50
		Red	TPSLSR		50
		Yellow	TPSLSY		50
		Blue	TPSLSBU		50
		Black	TPSLSBK		50
Switchable Link Assembly		SWCDS	35 A	50	
Lock Out Cap		LCCDS		50	
Shorting Plug		2 pole	QJ8/2		25

**CDS6U/TS**



8 x 82 mm  
51.0 mm / 59.2 mm / 56.7 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158

630 V	600 V	600 V
41 A	45 A	45 A
0.8 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
CDS6U/TS	50
EPCDS6U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA723/2	41 A	100
CA723/3	41 A	50
CA723/4	41 A	50
CA723/5	41 A	50
CA723/6	41 A	10
CA723/10	41 A	10
SLS2	35 A	50
SLS3	35 A	25
SLS4	35 A	25

SWCDS	35 A	50
LCCDS		50
QJ8/2		25

**CDS6U/FT**



8 x 82 mm  
51.0 mm / 59.2 mm / 56.7 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	600 V	600 V
41 A	45 A	45 A
0.8 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
CDS6U/FT	50
EPCDS6U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA723/2	41 A	100
CA723/3	41 A	50
CA723/4	41 A	50
CA723/5	41 A	50
CA723/6	41 A	10
CA723/10	41 A	10

SWCDS	35 A	50
LCCDS		50
QJ8/2		25

**CDS6U/SC**



8 x 82 mm  
51.0 mm / 59.2 mm / 56.7 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
41 A	45 A	45 A
0.8 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3


Type / Cat. No.	Standard Pack
CDS6U/SC	50
EPCDS6U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA723/2	41 A	100
CA723/3	41 A	50
CA723/4	41 A	50
CA723/5	41 A	50
CA723/6	41 A	10
CA723/10	41 A	10
SLS2	35 A	50
SLS3	35 A	25
SLS4	35 A	25

TPSLS	50
TPSLSR	50
TPSLSY	50
TPSLSBU	50
TPSLSBK	50


SWCDS	35 A	50
LCCDS		50
QJ8/2		25

## Usage of CDS6U range of products in Simple Current Transformer Test Circuit

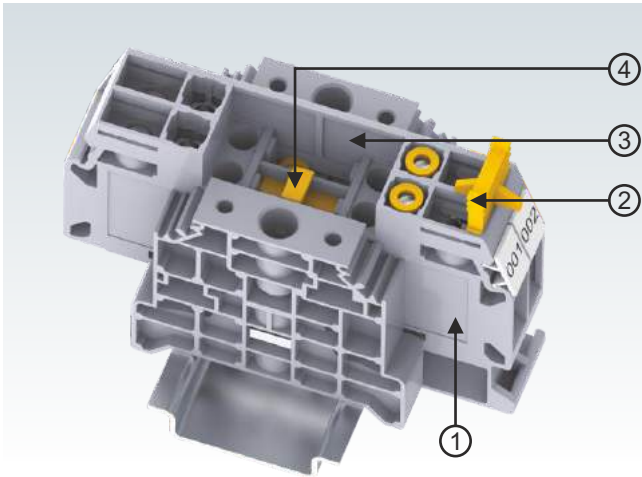


No.	Cat. No.	Qty.
1	CDS6U	2
2	SLS2	1
3	EPCDS6U	1
4	LCCDS	1

### Operating status

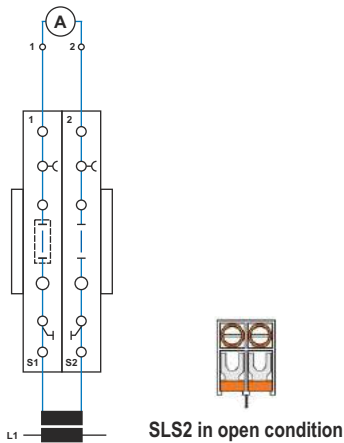


### Meter test for L1 through external power supply

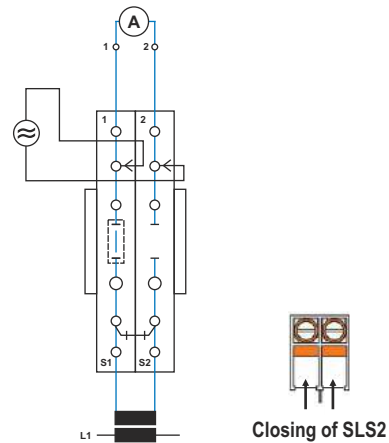

#### Sequence for test :

- 1) Close short circuit slide SLS2 of terminals 1 and 2.
- 2) Open disconnect slide link of terminal 2.
- 3) Connect external power supply to test sockets of terminals 1 and 2.


### Comparison measurement for L1

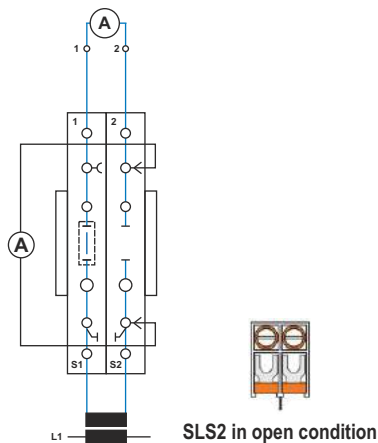

#### Sequence for test :

- 1) Remove SLS2 screw from terminal 2.
- 2) Connect ammeter to test sockets of terminal 2.
- 3) Open disconnect slide link of terminal 2.

### Changing the meter for L1



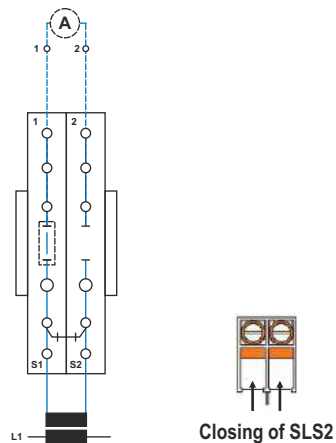


#### Sequence for test :

- 1) Close short circuit slide SLS2 of terminals 1 and 2.
- 2) Open disconnect slide link of terminal 2.
- 3) Disconnect meter for L1 at terminals 1 and 2.

## Usage of CDS6U range of products in 3 Phase Current Transformer Test Set


## Usage of CDS6U range of products in 3 Phase Linked Current Transformer Test Set

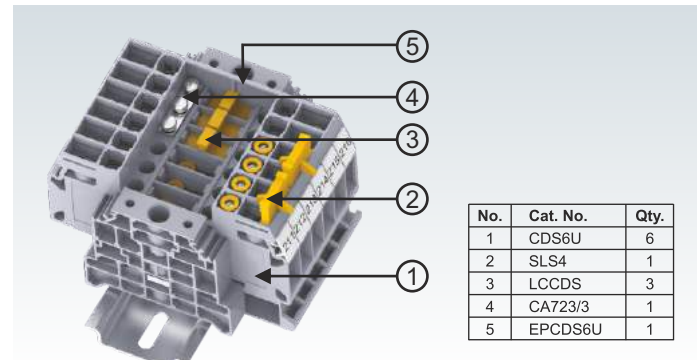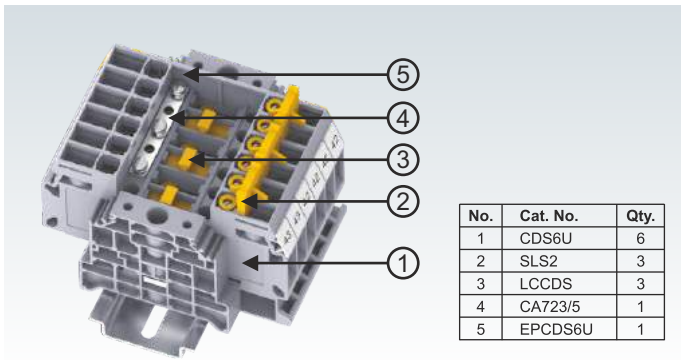


**Operating status**  
(with internal distribution of the k-point)




**SLS2 in open condition**



**Operating status**




**SLS4 in open condition**



### Comparison measurement for L1

**Sequence for test :**


- 1) Remove SLS2 screw from terminal 1.
- 2) Connect ammeter to test sockets of terminal 1.
- 3) Open disconnect slide link of terminal 1.



### Comparison measurement for L1

**Sequence for test :**


- 1) Remove SLS4 screw from terminal 1.
- 2) Connect ammeter to test sockets of terminal 1.
- 3) Open disconnect slide link of terminal 1.



### Meter test for L1 through external power supply

**Sequence for test :**


- 1) Close short circuit slide SLS2 of terminals 1 and 2.
- 2) Open disconnect slide link of terminal 1.
- 3) Connect external power supply to test sockets of terminals 1 and 2.



### Meter test for L1 through external power supply

**Sequence for test :**


- 1) Close short circuit slide SLS4 of terminals 1,2, 3 and 4.
- 2) Open disconnect slide link of terminal 1.
- 3) Connect external power supply to test sockets of terminals 1 and 5.



### Changing the meter for L1

**Sequence for test :**

- 1) Close short circuit slide SLS2 of terminals 1 and 2.
- 2) Open disconnect slide link of terminal 1.
- 3) Disconnect meter for L1.




### Changing the meter for L1

**Sequence for test :**


- 1) Close short circuit slide SLS4 of terminals 1,2, 3 and 4.
- 2) Open disconnect slide link of terminal 1.
- 3) Disconnect meter for L1.

# Usage of CDS6U Test Disconnect Terminal Block for 3 Phase 4 wire multi function meter

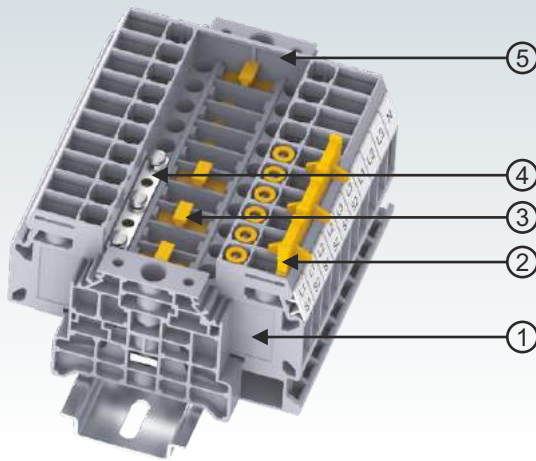


No.	Cat. No.	Qty.
1	CDS6U	10
2	SLS2	3
3	LCCDS	4
4	CA723/5	1
5	EPCDS6U	1

### Operating status

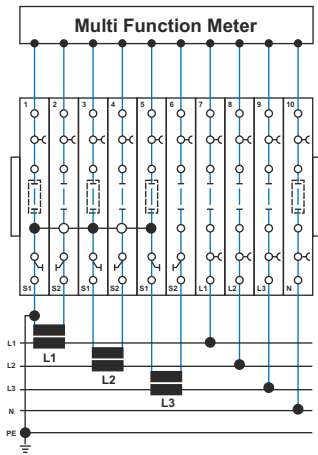

SLS2 in open condition

### Meter test for L1 through external power supply

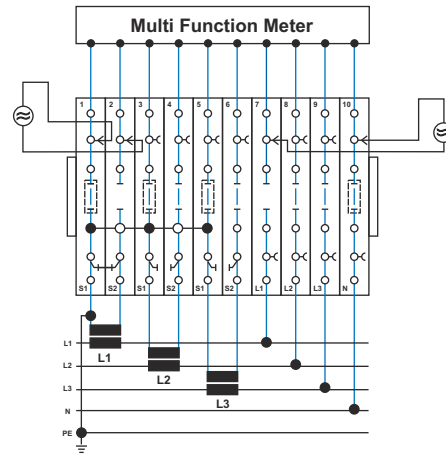


Closing of SLS2

#### Sequence for test :

- 1) Close short circuit slide SLS2 of terminals 1 and 2.
- 2) Open disconnect slide link of terminal 2 and 7.
- 3) Connect external power supply to test sockets of terminals 1, 2 and 7, 10.

### Comparison measurement for L1

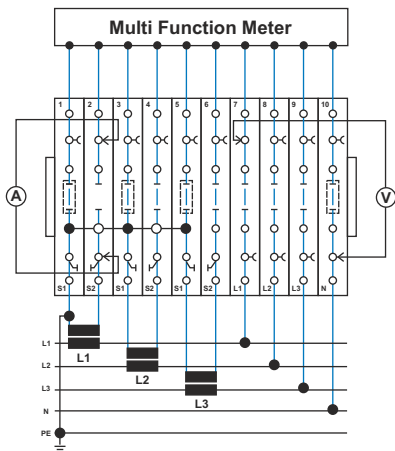


SLS2 in open condition

#### Sequence for test :

- 1) Remove SLS2 screw from terminal 2.
- 2) Connect ammeter to test sockets of terminal 2.
- 3) Open disconnect slide link of terminal 2.
- 4) Connect voltmeter to test sockets of terminals 7 and 10.

### Changing the meter for L1

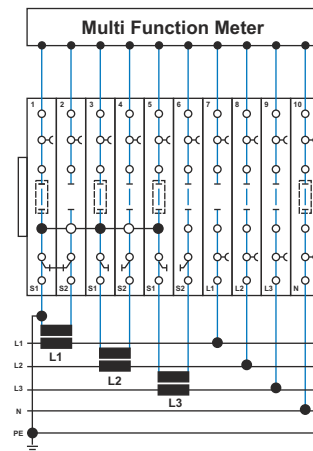


Closing of SLS2

#### Sequence for test :



- 1) Close short circuit slide SLS2 of terminals 1 and 2.
- 2) Open disconnect slide link of terminal 2 and 7.
- 3) Disconnect meter for L1 at terminals 1, 2 and 7.

# DISCONNECT & TEST TERMINAL BLOCKS

## CSDL4U



## DDDL4U



Width (Thickness) x Length	8 x 58 mm				8 x 88 mm						
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	44.5 mm / 52.0 mm / 49.4 mm				67.4 mm / 74.3 mm / 71.4 mm						
Connection Possibility as per	IEC	UL - CSA		IEC	UL - CSA		IEC	UL - CSA			
		With 1 Conductor per clamp	Stranded / Flexible		0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG		0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
			Solid		0.2 - 6.0 mm <sup>2</sup>						
With 2 same size Conductors per clamp	Stranded / Flexible with TWIN Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG		
		0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG							0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	9.5 mm				9.5 mm						
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158		IEC60947-7-1	UL-1059	CSA22.2-158				
Voltage	1000 V	600 V	600 V		800 V	600 V	600 V				
	Current	10 A	14 A	14 A	10 A	6.3 A	14 A	32 A			
Torque	0.5 Nm		7 lb-in	7 lb-in	0.5 Nm		7 lb-in	7 lb-in			
	Top Level				32 A		35 A	32 A			
Approvals											
Insulation Material / Material Group	Polyamide 6,6 / 1				Polyamide 6,6 / 1						
Rated Impulse Voltage / Pollution Degree	5 KV / 3				5 KV / 3						

		Type / Cat. No.	Standard Pack			Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CSDL4U	100	DDDL4U			20	
	Blue				DDDL4UBU			20
	Black				DDDL4UBK			20
End Plate		EPCSFL4U	50	EPDDL4U			50	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S			50 m	
		CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S			25 m	
End Clamp (Refer Pg. 220 for details)		CA702 / CA802	50	CA702 / CA802			50	
Marking Tags	On Terminal	CA509/K8WHT	100	CA509/K8WHT			100	
	Continuous Tag	CA509/K2WHT	100	CA509/K2WHT			100	
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm			10	

		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links						CA729/2	CA749/2	32 A	100
	2 pole					CA729/3	CA749/3	32 A	50
	3 pole					CA729/4	CA749/4	32 A	50
	4 pole					CA729/10	CA749/10	32 A	10
	10 pole								
Permanent Shorting Links						CA703/6		32 A	100
	2 pole					CA704/6		32 A	100
	3 pole					CA705/6		32 A	100
	4 pole					CA737/10		32 A	100
	10 pole								
Short Sleeve & Screw for Permanent Shorting Links						CA707/S/Q/3			100
Insulated External Shorting Links		CA711/2		32 A	100	CA711/2		32 A	100
	2 pole	CA711/3		32 A	50	CA711/3		32 A	50
	3 pole	CA711/4		32 A	50	CA711/4		32 A	50
	4 pole	CA711/10		32 A	20	CA711/10		32 A	20
	10 pole								

# DISTRIBUTION BLOCKS

The CDB range of Distribution Blocks is an ideal choice for a simplified distribution system. A bolt in the center of the block provides a connection point for the incoming cable. All the terminals are internally connected and provide multiple connection points for the outgoing wires. A protective shield effectively shrouds the incoming connection.

CDB4(1) blocks are recommended for applications where the input connection point is located at one end instead of the center.

CMDB blocks are a modified version of the CDB Terminal Blocks without the central incoming terminal connection.

**Note:**  
Sum of outgoing currents on either side of the center should not exceed half the maximum permissible incoming current

Sum of total outgoing currents should not exceed maximum permissible incoming current.

Connection for higher outgoing currents should be done through the terminal nearest to the incoming connection.

Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	46.2 mm / 53.7 mm / 51.1 mm		
Wire size at Input	16.0 mm <sup>2</sup> / 8 AWG		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup> / 22 - 10 AWG	
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup> / 22 - 10 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup> / 22 - 10 AWG	
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup> / 22 - 12 AWG	
Wire Stripping Length	8 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	800 V	600 V	600 V
Current	Total Output (on either side of Input)	Input	50 A
		Output	25 A
Torque	Input	64 A	50 A
		32 A	35 A
Torque	Output	26 lb-in	26 lb-in
		7 lb-in	7 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		


Terminal Block	Type / Cat. No.	No. of Outputs	Standard Pack
	CDB4/1	4	10
	CDB4/2	8	10
	CDB4/3	12	10
	CDB4/4	16	10
	CDB4/5	20	5
	CDB4/6	24	5

Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10


Type / Cat. No.	H x W x T ( mm )	No. of Output
CDB4/1	45 x 43 x 44	4
CDB4/2	45 x 43 x 56	8
CDB4/3	45 x 43 x 68	12
CDB4/4	45 x 43 x 80	16
CDB4/5	45 x 43 x 96	20
CDB4/6	45 x 43 x 108	24

Note: These Terminal Blocks are available in Red, Yellow, Blue, Black & Green colours.

## CDB4

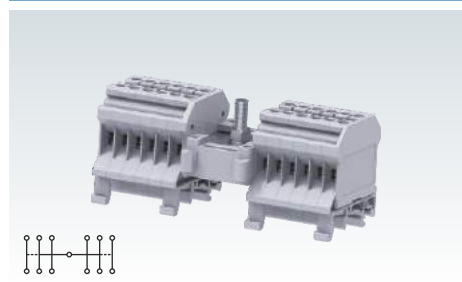

### CDB4(1)



46.2 mm / 53.7 mm / 51.1 mm

16.0 mm<sup>2</sup> / 8 AWG

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
64 A	50 A	50 A
64 A*	50 A	25 A
2.0 Nm	26 lb-in	26 lb-in
0.5 Nm	7 lb-in	7 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	No. of Outputs	Standard Pack
CDB4/2(1)	6	10
CDB4/3(1)	8	10
CDB4/4(1)	10	10
CDB4/5(1)	12	5
CDB4/6(1)	14	5
CDB4/10(1)	22	5
CDB4/11(1)	24	5

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m


CA702 / CA802	50
---------------	----

CA509/K6WHT	100
-------------	-----

SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10
-------------------------------------	----

Type / Cat. No.	H x W x T ( mm )	No. of Output
CDB4/2(1)	45 x 43 x 52	6
CDB4/3(1)	45 x 43 x 58	8
CDB4/4(1)	45 x 43 x 64	10
CDB4/5(1)	45 x 43 x 70	12
CDB4/6(1)	45 x 43 x 76	14
CDB4/10(1)	45 x 43 x 100	22
CDB4/11(1)	45 x 43 x 106	24

### CDB6



47.8 mm / 55.5 mm / 52.8 mm

25.0 mm<sup>2</sup> / 2 AWG

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG

9 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
82 A	100 A	100 A
41 A	50 A	50 A
3.0 Nm	35 lb-in	35 lb-in
0.8 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	No. of Outputs	Standard Pack
CDB6/1	4	10
CDB6/2	8	10
CDB6/3	12	10
CDB6/4	16	5

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m



CA702 / CA802	50
---------------	----

CA509/K8WHT	100
-------------	-----

SCS0.8/4 Blade size: 0.8 x 4 mm	10
---------------------------------	----

Type / Cat. No.	H x W x T ( mm )	No. of Output
CDB6/1	43 x 48 x 48	4
CDB6/2	43 x 48 x 64	8
CDB6/3	43 x 48 x 80	12
CDB6/4	43 x 48 x 96	16

### CDB10



47.8 mm / 55.5 mm / 52.8 mm

35.0 mm<sup>2</sup> / 1/0 AWG

IEC	UL - CSA
1.5 - 10 mm <sup>2</sup>	16 - 6 AWG
1.5 - 10 mm <sup>2</sup>	
1.5 - 10 mm <sup>2</sup>	16 - 6 AWG
1.5 - 6 mm <sup>2</sup>	16 - 8 AWG
1.5 - 6 mm <sup>2</sup>	16 - 8 AWG

11 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
114 A	130 A	130 A
57 A	65 A	65 A
6.0 Nm	53 lb-in	53 lb-in
1.2 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	No. of Outputs	Standard Pack
CDB10/2	8	10
CDB10/3	12	10
CDB10/4	16	5

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m


CA702 / CA802	50
---------------	----

CA509/K10WHT	100
--------------	-----

SCS0.8/4 Blade size: 0.8 x 4 mm	10
---------------------------------	----

Type / Cat. No.	H x W x T ( mm )	No. of Output
CDB10/2	43 x 48 x 72	8
CDB10/3	43 x 48 x 92	12
CDB10/4	43 x 48 x 112	16

#### Phase Distribution Application with CDB Terminals

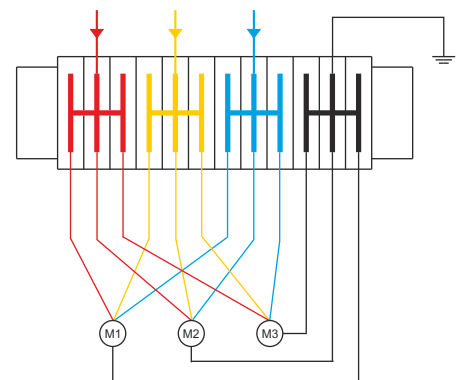


\* Total output current of the system.



# DISTRIBUTION BLOCKS

## CDB25

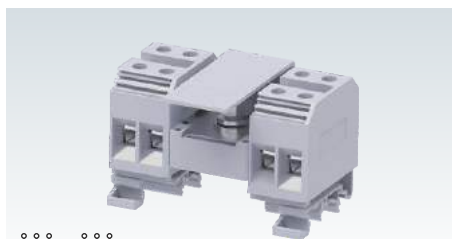

## CMDB4



Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	57.2 mm / 64.7 mm / 62.3 mm				46.2 mm / 53.7 mm / 51.1 mm							
Wire size at Input	50.0 mm <sup>2</sup> / 2/0 AWG											
Connection Possibility as per	IEC		UL - CSA		IEC		UL - CSA					
With 1 Conductor per clamp	Stranded / Flexible		12 - 2 AWG		0.2 - 4.0 mm <sup>2</sup>		22 - 10 AWG					
	Solid				0.2 - 6.0 mm <sup>2</sup>							
With 2 same size Conductors per clamp	with Ferrule / Lug		12 - 2 AWG		0.2 - 4.0 mm <sup>2</sup>		22 - 10 AWG					
	Stranded / Flexible		12 - 8 AWG		0.2 - 2.5 mm <sup>2</sup>		22 - 12 AWG					
	with TWIN Ferrule / Lug		12 - 8 AWG		0.2 - 2.5 mm <sup>2</sup>		22 - 12 AWG					
Wire Stripping Length	14 mm				8 mm							
Ratings As Per	IEC60947-7-1		UL-1059		IEC60947-7-1		UL-1059					
Voltage	800 V		600 V		1000 V		600 V					
	600 V		600 V									
Current	150 A		150 A		32 A		35 A					
	75 A		75 A									
Torque	6.0 Nm		53 lb-in		0.5 Nm		7 lb-in					
	2.0 Nm		22 lb-in									
Approvals												
Insulation Material / Material Group	Polyamide 6,6 / 1				Polyamide 6,6 / 1							
Rated Impulse Voltage / Pollution Degree	8 KV / 3				8 KV / 3							
	Type / Cat. No.		No. of Outputs		Standard Pack		Type / Cat. No.		No. of Outputs		Standard Pack	
Terminal Block	CDB25/1		4		10		CMDB4/2		4		10	
	CDB25/2		8		10		CMDB4/3		6		10	
	CDB25/3		12		10		CMDB4/4		8		10	
	CDB25/4		16		5		CMDB4/10		20		5	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S		50 m		CA701-1M / CA701-1M-S		50 m					
	CA701-15-1M / CA701-15-1M-S		25 m		CA701-15-1M / CA701-15-1M-S		25 m					
End Clamp (Refer Pg. 220 for details)	CA702 / CA802		50		CA702 / CA802		50					
Marking Tags (Refer Pg. 224 for details)	CA509/K12WHT		100		CA509/K6WHT		100					
Warning Label					SWL4		50					
Screw Driver	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm		10		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm		10					
	Type / Cat. No.		H x W x T ( mm )		No. of Output		Type / Cat. No.		H x W x T ( mm )		No. of Output	
	CDB25/1		56 x 49 x 64		4		CMDB4/2		45 x 43 x 13.5		4	
	CDB25/2		56 x 49 x 88		8		CMDB4/3		45 x 43 x 19.5		6	
	CDB25/3		56 x 49 x 112		12		CMDB4/4		45 x 43 x 25.5		8	
	CDB25/4		56 x 49 x 136		16		CMDB4/10		45 x 43 x 61.5		20	

Note: These Terminal Blocks are available in Red, Yellow, Blue, Black & Green colours.

**CMDB6**



47.8 mm / 55.5 mm / 52.8 mm

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG

9 mm

IEC60947-7-1 UL-1059

1000 V	600 V		
41 A	50 A		

0.8 Nm 14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	No. of Outputs	Standard Pack
CMDB6/2	4	10
CMDB6/3	6	10
CMDB6/4	8	5
CMDB6/10	20	5
CA701-1M / CA701-1M-S		50 m
CA701-15-1M / CA701-15-1M-S		25 m
CA702 / CA802		50
CA509/K8WHT		100
SWL6		50
SCS0.8/4	Blade size: 0.8 x 4 mm	10

Type / Cat. No.	H x W x T ( mm )	No. of Output
CMDB6/2	43 x 48 x 17.5	4
CMDB6/3	43 x 48 x 25.5	6
CMDB6/4	43 x 48 x 33.5	8
CMDB6/10	43 x 48 x 81.5	20

**CMDB10**



47.8 mm / 55.5 mm / 52.8 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 10 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 10 AWG

11 mm

IEC60947-7-1 UL-1059

1000 V	600 V		
57 A	65 A		

1.2 Nm 14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	No. of Outputs	Standard Pack
CMDB10/2	4	10
CMDB10/3	6	10
CMDB10/4	8	5
CMDB10/10	20	5
CA701-1M / CA701-1M-S		50 m
CA701-15-1M / CA701-15-1M-S		25 m
CA702 / CA802		50
CA509/K10WHT		100
SCS0.8/4	Blade size: 0.8 x 4 mm	10

Type / Cat. No.	H x W x T ( mm )	No. of Output
CMDB10/2	43 x 48 x 21.5	4
CMDB10/3	43 x 48 x 31.5	6
CMDB10/4	43 x 48 x 41.5	8
CMDB10/10	43 x 48 x 101.5	20

**CMDB25**



57.2 mm / 64.7 mm / 62.3 mm

IEC	UL - CSA
6.0 - 25.0 mm <sup>2</sup>	12 - 4 AWG
6.0 - 25.0 mm <sup>2</sup>	12 - 4 AWG
6.0 - 16.0 mm <sup>2</sup>	12 - 6 AWG
6.0 - 16.0 mm <sup>2</sup>	12 - 8 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V	
101 A	85 A	85 A	

2.0 Nm 22 lb-in 22 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	No. of Outputs	Standard Pack
CMDB25/2	4	10
CMDB25/3	6	10
CMDB25/4	8	5
CMDB25/10	20	5
CA701-1M / CA701-1M-S		50 m
CA701-15-1M / CA701-15-1M-S		25 m
CA702 / CA802		50
CA509/K12WHT		100
SCS1.0/5.5	Blade size: 1.0 x 5.5 mm	10


Type / Cat. No.	H x W x T ( mm )	No. of Output
CMDB25/2	56 x 49 x 26	4
CMDB25/3	56 x 49 x 38	6
CMDB25/4	56 x 49 x 50	8
CMDB25/10	56 x 49 x 62	20

# COMPACT DISTRIBUTION BLOCKS

Compact Distribution Block is used for single phase distribution systems. These blocks can either be mounted on a Din Rail or can be panel mounted.


These blocks are completely shrouded and offer IP 20 protection.

## DB16



Width (Thickness) x Length	27 x 66 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	50.8 mm / 57.8 mm		
Total number of connection points	7		
Connection Possibility as per	IEC	UL - CSA	
At 1 Connection Point (Input)	Wire Range	6 - 16 mm <sup>2</sup> (3 Conn.)	
	Stripping Length	15 mm	
	Torque	1.2 Nm	
At Position A in diagram below	Wire Range	2.5 - 6 mm <sup>2</sup> (4 Conn.)	
	Stripping Length	9 mm	
	Torque	0.8 Nm	
At Position B in diagram below	Wire Range	8 - 4 AWG	
	Stripping Length	15 mm	
	Torque	14 lb-in	
At Position C in diagram below	Wire Range	14 - 10 AWG	
	Stripping Length	9 mm	
	Torque	7 lb-in	
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	1000 V	600 V	600 V
Current	76 A	80 A	80 A
Torque	1.2 / 0.8 Nm	14 / 7 lb-in	14 / 7 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	6 KV / 3		
Terminal Block	Grey	DB16	10
	Blue	DB16BU	10
	Red	DB16R	10
	Yellow	DB16Y	10
	Black	DB16BK	10
	Green	DB16GN	10
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50	
Marking Tags (Refer Pg. 224 for details)	CA509/K7.5WHT	100	
Screw Driver	SCPH2	Blade size: 2 x 100 mm	10

Note:  
Sum of total outgoing currents should not exceed maximum permissible incoming current.

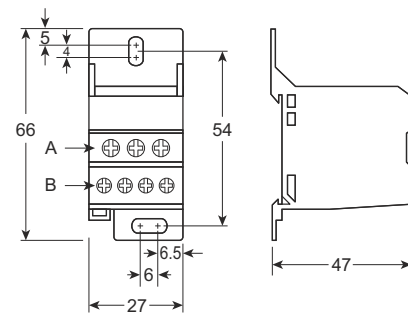

**DB25**



30.5 x 55.4 mm

52.1 mm / 61.35 mm

6

IEC

2.5 - 25 mm<sup>2</sup> (2 Conn.)

17 mm

3.0 Nm

1.5 - 10 mm<sup>2</sup> (3 Conn.)

9 mm

2.0 Nm

1.5 - 10 mm<sup>2</sup> (3 Conn.)

9 mm

2.0 Nm

IEC60947-7-1

690 V

100 A

3.0 / 2.0 Nm



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.

Standard Pack

DB25

1

DB25BU

1

DB25GN

1

CA701-1M / CA701-1M-S

50 m

CA701-15-1M / CA701-15-1M-S

25 m


CA702 / CA802

50

SCPH2

Blade size: 2 x 100 mm

10

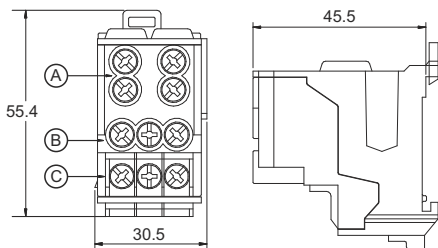

**DB35**



27 x 74.5 mm

50.8 mm / 57.8 mm

8

IEC

UL - CSA

6 - 35 mm<sup>2</sup> (1 Conn.)

15 mm

6 Nm

6 - 16 mm<sup>2</sup> (1 Conn.)

15 mm

3 Nm

2.5 - 10 mm<sup>2</sup> (6 Conn.)

10 mm

2.0 Nm

8 - 2 AWG

15 mm

40 lb-in

8 - 4 AWG

15 mm

14 lb-in

14 - 6 AWG

10 mm

17.5 lb-in

IEC60947-7-1

UL-1059

1000 V

600 V

125 A

115 A

6.0 / 3.0 Nm 40 / 17.5 lb-in



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.

Standard Pack

DB35

10

DB35BU

10

DB35R

10

DB35Y

10

DB35BK

10

DB35GN

10

CA701-1M / CA701-1M-S

50 m

CA701-15-1M / CA701-15-1M-S

25 m

CA702 / CA802

50


CA509/K7.5WHT

100

SCPH2

Blade size: 2 x 100 mm

10

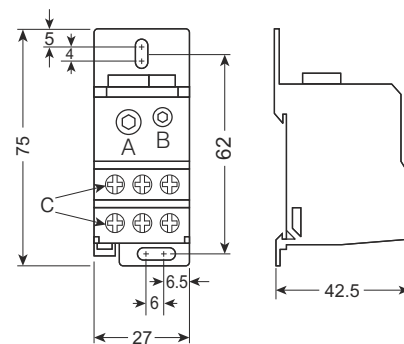

**DB70**



41.6 x 74.45mm

55.2 mm / 66.5 mm

8

IEC

UL - CSA

10 - 70 mm<sup>2</sup> (1 Conn.)

17 mm

10.0 Nm

2.5 - 25 mm<sup>2</sup> (2 Conn.)

12 mm

2.0 Nm

1.5 - 16 mm<sup>2</sup> (3 Conn.)

12 mm

2.0 Nm

8 - 1/0 AWG

17 mm

90 lb-in

14 - 4 AWG

12 mm

27 lb-in

16 - 6 AWG

12 mm

27 lb-in

IEC60947-7-1

UL-1059

1000 V

600 V

160 A

160 A

10.0 / 2.0 Nm 90 / 27 lb-in



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.

Standard Pack

DB70

1

CA701-1M / CA701-1M-S

50 m

CA701-15-1M / CA701-15-1M-S

25 m


CA702 / CA802

50

SCPH2

Blade size: 2 x 100 mm

10

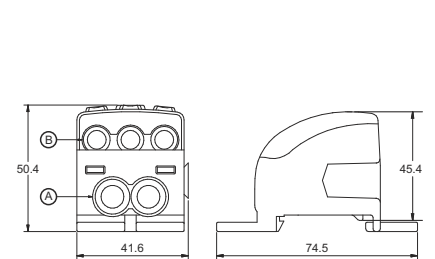

# COMPACT DISTRIBUTION BLOCKS

## PDB400





## DB185



Width (Thickness) x Length	53.3 x 94 mm		53.3 x 94 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	77.5 mm / 85.0 mm		68 mm / 74.0 mm	
Total number of connection points	8		8	
<b>Connection Possibility as per</b>	<b>IEC</b>	<b>UL - CSA</b>	<b>IEC</b>	<b>UL - CSA</b>
At 1 Connection Point (Input)	Wire Range	35 - 120 mm <sup>2</sup> (1 Conn.)	2 - 250 KCMIL	95 - 185 mm <sup>2</sup> (1 Conn.)
	Stripping Length	27 mm	19 mm	27 mm
	Torque	19.0 Nm	172 lb-in	19.0 Nm
At 2 Connection Points (Position A in diagram)	Wire Range	4.0 - 35 mm <sup>2</sup> (2 Conn.)	12 - 2 AWG	4.0 - 35 mm <sup>2</sup> (2 Conn.)
	Stripping Length	18 mm	18 mm	18 mm
	Torque	2.5 Nm	54 lb-in	2.5 Nm
At 3 Connection Point (Position B in diagram)	Wire Range	2.5 - 25 mm <sup>2</sup> (3 Conn.)	14 - 4 AWG	2.5 - 25 mm <sup>2</sup> (3 Conn.)
	Stripping Length	12 mm	12 mm	12 mm
	Torque	2.0 Nm	27 lb-in	2.0 Nm
At 4 Connection Point (Position C in diagram)	Wire Range	1.5 - 16 mm <sup>2</sup> (4 Conn.)	16 - 6 AWG	1.5 - 16 mm <sup>2</sup> (4 Conn.)
	Stripping Length	12 mm	12 mm	12 mm
	Torque	2.0 Nm	27 lb-in	2.0 Nm
<b>Ratings As Per</b>	IEC60947-7-1	UL-1059	IEC60947-7-1	UL-1059
Voltage	1000 V	600 V	1000 V	600 V
Current	250 A	250 A	353 A	310 A
Torque	19.0 / 2.5 / 2.0 Nm 172 / 54 / 27 lb-in		19.0 / 2.5 / 2.0 Nm 227 / 54 / 27 lb-in	
<b>Approvals</b>				
Insulation Material / Material Group	Polyamide 6,6 / 1		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	6 KV / 3		6 KV / 3	


	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	PDB400	1	DB185	1
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50	CA702 / CA802	50
Marking Tags (Refer Pg. 224 for details)				
Screw Driver	SCPH2 Blade size: 2 x 100 mm	10	SCPH2 Blade size: 2 x 100 mm	10

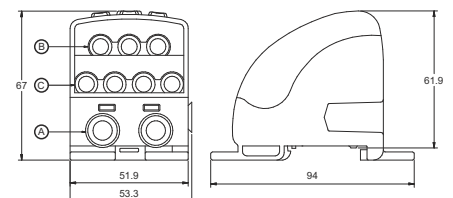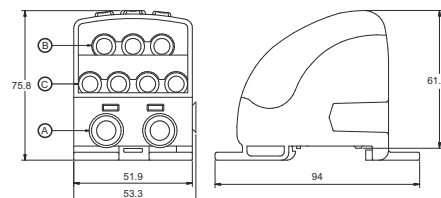

# COMPONENT CARRIER TERMINAL BLOCK

The CCC4U Terminal Block is a component carrier base. Various pluggable component carriers can be installed easily. These component carriers have built in protection against incorrect polarity.

## CCC4U

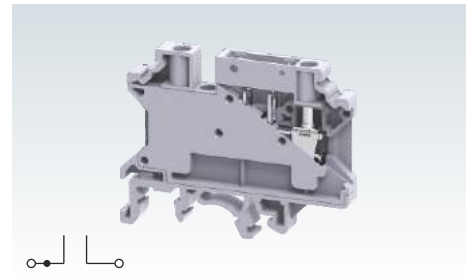


Width (Thickness) x Length	6 x 58.5 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	46.0 mm / 53.5 mm / 51.5 mm			
Connection Possibility as per	IEC	UL - CSA		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
	Solid	0.2 - 6.0 mm <sup>2</sup>		
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
Wire Stripping Length	8 mm			
Ratings As Per	IEC60947-7-1 UL-1059			
Voltage	1000 V	600 V		
Current	*	*		
Torque	0.5 Nm	4.5 lb-in		
Approvals	CE			
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3			
	Type / Cat. No.	Standard Pack		
Terminal Block	CCC4U	50		
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m		
	CA701-15-1M / CA701-15-1M-S	25 m		
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50		
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100		
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10		
	Type / Cat. No.	Imax	Standard Pack	
Pre Assembled Shorting Links	2 pole	CA722/2	10 A	100
	3 pole	CA722/3	10 A	100
	4 pole	CA722/4	10 A	100
	10 pole	CA722/10	10 A	10
	100 pole	CA722/100	10 A	10

\* Current Rating is based on Plug used.


# COMPONENT CARRIERS

CPD1 is component plug with built in diode 1N4007 (Not to be used with fuse). CPF is component fuse plug suitable for Ø 5 x 20 mm fuses. CPFL is component plug which provides offline indication in case of a blown off fuse. These plugs can be used with CXCC4 Terminal Block.

## CPD1



## CPF



## CIP




	Type / Cat. No.	Std. Pack	Type / Cat. No.	Std. Pack	Type / Cat. No.	Std. Pack
Component Carrier	CPD1	50	CPF	50	CIP	50
With Diode For Ø 5 x 20 mm Fuse Fuse with 6-60V AC/DC LED Circuit Fuse with 110-240V AC/DC LED Circuit			CPFL6-60V	50		
			CPFL110-240V	50		
Width (Thickness) x Length x Height	6 x 28 x 35 mm		6 x 28 x 35 mm		5.4 x 17.45 x 26 mm	
Current Rating *	1 A		6.3 A & 10 A		10 A	
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100	CA509/K6WHT	100		

# HIGH VOLTAGE TERMINAL BLOCKS

The CHV series Terminal Blocks have been specially designed for extremely high voltage (1500 VDC) applications.


A specially designed flexible foot enables easy mounting and dismounting from the mounting rail with the help of a screw driver. These Terminal Blocks have marker holding recesses to accept marking tags for circuit identification. Cross connection can be achieved with the aid of shorting links / sleeves & screws.

## CHV4U



Width (Thickness) x Length		6 x 52 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail		63.4 mm / 70.8 mm / 68.2 mm		
Connection Possibility as per		IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
Wire Stripping Length		12 mm		
Ratings As Per		IEC60947-7-1	UL-1059	CSA22.2-158
Voltage		1000 V	1000 V	1000 V
Current		32 A	35 A	35 A
Torque		0.5 Nm	7 lb-in	7 lb-in
Approvals				
Insulation Material / Material Group		Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree		8 KV / 3		
		<b>Type / Cat. No.</b>	<b>Standard Pack</b>	
Terminal Block	Grey / Blue	CHV4U	50	
		CHV4UBU	50	
End Plate		EPUSC	50	
Separator Plate		SP2.5/4UN	50	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m	
		CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)		CA702 / CA802	50	
Marking Tags (Refer Pg. 224 for details)		CA509/K6WHT	100	
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	
		<b>Type / Cat. No.</b>	<b>I<sub>max</sub></b>	<b>Standard Pack</b>
Pre Assembled Shorting Links		CA623/2	32 A	100
		CA623/3	32 A	100
		CA623/4	32 A	100
		CA623/10	32 A	10

### CHV6U



8 x 52 mm

63.4 mm / 70.8 mm / 68.2 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	1000 V	1000 V
41 A	50 A	50 A
0.8 Nm	14 lb-in	14 lb-in




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CHV6U	50
CHV6UBU	50
EPUSC	50
SP2.5/4UN	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA624/2	41 A	100
CA624/3	41 A	100
CA624/4	41 A	100
CA624/10	41 A	10

### CHV10U



10 x 52 mm

63.4 mm / 70.8 mm / 68.2 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	20 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	20 - 6 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	1000 V	1000 V
57 A	65 A	65 A
1.2 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CHV10U	50
CHV10UBU	50
EPUSC	50
SP2.5/4UN	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K10WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA625/2	57 A	100
CA625/3	57 A	100
CA625/4	57 A	100
CA625/10	57 A	10



# SPRING LOADED TERMINAL BLOCKS

These modified version of feed through Terminal Blocks come with springs below the clamps. These Terminal Blocks are preferred for connections that involve safety requirements of the Electric Supply Industry (ESI) standards, British CEBG regulations and NTPC applications. In addition to the high torque screws, these blocks have a built-in spring loading feature.

It is recommended to use hook type lug / ferrule for terminating wires in such connections.

These Terminal Blocks have a specially designed current bar for the right location & placement of wires crimped in hook type lug / ferrule, thus preventing loosening of the wires even when the screw clamps are not tightened.

Width (Thickness) x Length

Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail

Connection Possibility as per

With 1 Conductor per clamp	Stranded / Flexible
	Solid
with Ferrule / Lug	

With 2 same size Conductors per clamp	Stranded / Flexible
	with TWIN Ferrule / Lug

Wire Stripping Length

Ratings As Per

Voltage







Current

Torque


Approvals


Insulation Material / Material Group

Rated Impulse Voltage / Pollution Degree

Terminal Block	Grey Blue
End Plate	
Separator Plate	
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Marking Tags (Refer Pg. 224 for details)	
Screw Driver	

Shorting Links

Pre Assembled Shorting Links		2 pole
		3 pole
		4 pole
		10 pole

Hook Type Lug / Ferrule		1.5 sq.mm
		2.5 sq.mm
		4 sq.mm
		6 sq.mm
		10 sq.mm

## CTS4USC



6 x 52 mm

63.4 mm / 70.8 mm / 68.2 mm

IEC	UL - CSA
-----	----------

0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
---------------------------	-------------

0.2 - 6.0 mm <sup>2</sup>	
---------------------------	--

0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
---------------------------	-------------

0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
---------------------------	-------------

0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
---------------------------	-------------

12 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	600 V	600 V
--------	-------	-------

32 A	35 A	35 A
------	------	------

0.5 Nm	7 lb-in	7 lb-in
--------	---------	---------



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS4USC	50
CTS4USCBU	50
EPUSC	50
SP2.5/4UN	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
-----------------	------------------	---------------

CA623/2	32 A	100
---------	------	-----

CA623/3	32 A	100
---------	------	-----

CA623/4	32 A	100
---------	------	-----


CA623/10	32 A	10
----------	------	----

CA604/1		100
---------	--	-----

CA604/2		100
---------	--	-----

CA604/5		100
---------	--	-----

**CTS6USC**



8 x 52 mm

63.4 mm / 70.8 mm / 68.2 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	1000 V	1000 V
41 A	50 A	50 A
0.8 Nm	14 lb-in	14 lb-in




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS6USC	50
CTS6USCUB	50
EPUSC	50
SP2.5/4UN	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA624/2	41 A	100
CA624/3	41 A	100
CA624/4	41 A	100
CA624/10	41 A	10
CA604/1		100
CA604/2		100
CA604/5		100
CA604/3		100

**CTS10USC**



10 x 52 mm

63.4 mm / 70.8 mm / 68.2 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	20 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	20 - 6 AWG
0.2 - 6.0 mm <sup>2</sup>	20 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	20 - 8 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	1000 V	1000 V
57 A	65 A	65 A
1.2 Nm	14 lb-in	14 lb-in




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS10USC	50
EPUSC	50
SP2.5/4UN	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K10WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA625/2	57 A	100
CA625/3	57 A	100
CA625/4	57 A	100
CA625/10	57 A	10
CA604/1		100
CA604/2		100
CA604/5		100
CA604/4		100
CA604/3		100

**CDS6U/SC**



8 x 82 mm

51.0 mm / 59.2 mm / 56.7 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
41 A	45 A	45 A
0.8 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CDS6U/SC	50
EPCDS6U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA723/2	41 A	100
CA723/3	41 A	50
CA723/4	41 A	50
CA723/10	41 A	50
CA604/1		100
CA604/2		100
CA604/5		100
CA604/3		100

**Note:**  
For other accessories for CDS6U please refer page 49.

# SPRING LOADED TERMINAL BLOCKS





These modified version of feed through Terminal Blocks come with springs below the clamps. These Terminal Blocks are preferred for connections that involve safety requirements of the Electric Supply Industry (ESI) standards, British CEBG regulations and NTPC applications. In addition to the high torque screws, these blocks have a built-in spring loading feature.






It is recommended to use hook type lug / ferrule for terminating wires in such connections.

These Terminal Blocks have a specially designed current bar for the right location & placement of wires crimped in hook type lug / ferrule, thus preventing loosening of the wires even when the screw clamps are not tightened.


Width (Thickness) x Length	
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	
Connection Possibility as per	
With 1 Conductor per clamp	Stranded / Flexible Solid with Ferrule / Lug
With 2 same size Conductors per clamp	Stranded / Flexible with TWIN Ferrule / Lug
Wire Stripping Length	
Ratings As Per	
Voltage	
Current	
Torque	
Approvals	

Insulation Material / Material Group	
Rated Impulse Voltage / Pollution Degree	

Terminal Block	Grey
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Marking Tags (Refer Pg. 224 for details)	
Screw Driver	

Shorting Links		
Pre Assembled Shorting Links		2 pole
		3 pole
		4 pole
		10 pole
		100 pole
Permanent Shorting Links		2 pole
		3 pole
		4 pole
		10 pole
		10 pole (Breakable)
Short Sleeve & Screw for Permanent Shorting Links		
Insulated External Shorting Links		2 pole
		3 pole
		4 pole
		10 pole
Shorting Plug		2 pole

## CKT4SPSC

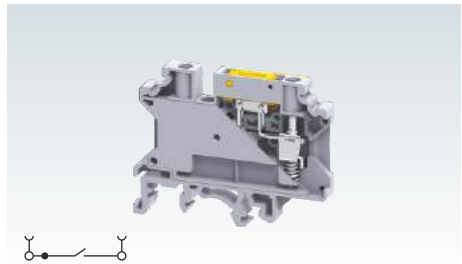

6 x 58.5 mm			
46.0 mm / 53.5 mm / 51.5 mm			
IEC		UL - CSA	
0.2 - 4.0 mm <sup>2</sup>		24 - 10 AWG	
0.2 - 6.0 mm <sup>2</sup>		24 - 10 AWG	
0.2 - 4.0 mm <sup>2</sup>		24 - 10 AWG	
0.2 - 2.5 mm <sup>2</sup>		24 - 12 AWG	
0.2 - 2.5 mm <sup>2</sup>		24 - 12 AWG	
8 mm			
IEC60947-7-1 UL-1059 CSA22.2-158			
1000 V	600 V	600 V	
28 A	30 A	30 A	
0.5 Nm	4.5 lb-in	4.5 lb-in	





Polyamide 6,6 / 1			
8 KV / 3			

Type / Cat. No.	Standard Pack
CKT4SPSC	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Uninsulated	Insulated	Imax	Standard Pack
CA722/2	CA742/2	28 A	100
CA722/3	CA742/3	28 A	100
CA722/4	CA742/4	28 A	100
CA722/10	CA742/10	28 A	10
CA722/100	CA742/100	28 A	10
CA703/1		28 A	100
CA704/1		28 A	100
CA705/1		28 A	100
CA732/10		28 A	100
CA732/10-A		28 A	100
CA732/100		28 A	10
CA707/S/Q/01			100
CA714/2		28 A	100
CA714/3		28 A	100
CA714/4		28 A	100
CA714/10		28 A	20

--	--	--	--

**CDTTUSC**



8 x 63 mm

58.7 mm / 65.7 mm / 63.7 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG

12 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
57 A	41 A	41 A
1.2 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
CDTTUSC	50
EPCDTTU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack

CA710/2	35 A	100
CA710/3	35 A	50
CA710/4	35 A	50
CA710/10	35 A	20
QJ8/2		25

**CDTTUFTSC**



8 x 63 mm

58.7 mm / 65.7 mm / 63.7 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	16 - 10 AWG

12 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	600 V	600 V
57 A	41 A	41 A
1.2 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3


Type / Cat. No.	Standard Pack
CDTTUFTSC	50
EPCDTTU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K8WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10








Type / Cat. No.	I <sub>max</sub>	Standard Pack

CA710/2	35 A	100
CA710/3	35 A	50
CA710/4	35 A	50
CA710/10	35 A	20


# MICRO TERMINAL BLOCKS








These Terminal Blocks are extremely compact and are used in applications with space constraints. These blocks should be used with DIN 15 type (DIN 2) rails.

The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.

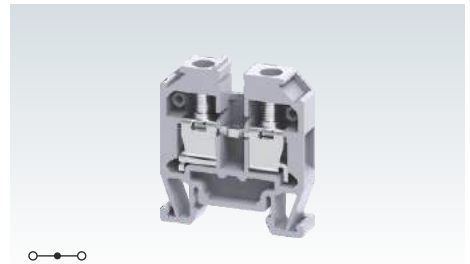Width (Thickness) x Length		6 x 27 mm			
Height with DIN 15 mm Rail		30.4 mm			
Connection Possibility as per		IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG		
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>			
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG		
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG		
Wire Stripping Length		8 mm			
Ratings As Per		IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7
Voltage		500 V	300 V	300 V	380 V
Current		32 A	35 A	35 A	28 A
Torque		0.5 Nm	7 lb-in	7 lb-in	0.5 Nm
Approvals					
Insulation Material / Material Group		Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree		4 KV / 3			
		Type / Cat. No.		Standard Pack	
Terminal Block	Grey	CMT4		100	
	Blue	CMT4BU		100	
	Red	CMT4R		100	
	Yellow	CMT4Y		100	
	Black	CMT4BK		100	
	Green	CMT4GN		100	
	Ground / Earth (Refer Pg. 28 for Details)		CGMT4		100
End Plate 		EPCMT4		50	
Partition Plate 		PPCMT4		50	
Mounting Rail (Refer Pg. 219 for details) 		CA601		50	
End Clamp (Refer Pg. 220 for details) 		CA602		50	
Marking Tags (Refer Pg. 224 for details) 		CA509/K2WHT		100	
Screw Driver 		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm		10	

## CMT4




Shorting Links		Uninsulated	Insulated	Imax	Standard Pack
Pre Assembled Shorting Links 	2 pole	CA727/2	CA747/2	32 A	100
	3 pole	CA727/3	CA747/3	32 A	100
	4 pole	CA727/4	CA747/4	32 A	100
	10 pole	CA727/10	CA747/10	32 A	10
	100 pole				
Permanent Shorting Links 	2 pole	CA703/1		32 A	100
	3 pole	CA704/1		32 A	100
	4 pole	CA705/1		32 A	100
	10 pole	CA732/10		32 A	100
	10 pole (Breakable)	CA732/10-A		32 A	100
	100 pole	CA732/100		32 A	10
Short Sleeve & Screw for Permanent Shorting Links 		CA607/S/Q		100	
Switchable Shorting Links 		CA706/1		32 A 100	
Long Sleeve & Screw for Switchable Shorting Links 		CA607/L/Q		100	
Insulated External Shorting Links 	2 pole	CA714/2		25 A	100
	3 pole	CA714/3		25 A	100
	4 pole	CA714/4		25 A	100
	10 pole	CA714/10		25 A	20
Test Socket 		CA707/TS/03		100	


# PANEL MOUNT TERMINAL BLOCK





A perfect solution for extremely compact wiring applications, these Terminal Blocks are modular and can be stacked to form multi-pole Terminal Block assemblies. The stacked assemblies are fitted with mounting End Plates on both ends for easy installations.

M3 screw of desired length can be used for mounting.


The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.

## CMB4





Width (Thickness) x Length	6 x 27 mm			
Height	28.5 mm			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	Solid	0.2 - 6.0 mm <sup>2</sup>		
With 2 same size Conductors per clamp	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG	
with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG		
Wire Stripping Length	8 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7
Voltage	500 V	300 V	300 V	440 V
Current	32 A	30 A	35 A	28 A
Torque	0.5 Nm	7 lb-in	7 lb-in	0.5 Nm
Approvals				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	4 KV / 3			
	Type / Cat. No.		Standard Pack	
Terminal Block	Grey	CMB4	100	
	Blue	CMB4BU	100	
	Red	CMB4R	100	
	Yellow	CMB4Y	100	
	Black	CMB4BK	100	
	Green	CMB4GN	100	
	Orange	CMB4O	100	
	White	CMB4W	100	
End Plate		EPCMB4	50	
Separator Plate		SPCMB4	50	
Marking Tags (Refer Pg. 224 for details)		CA509/K2WHT	100	
Screw Driver		SCS0.6/3.5	Blade size: 0.6 x 3.5 mm 10	

Note: It is recommended to use additional End Plate after every 20 Terminal Blocks in a stacked assembly.



End Plate



Shorting Links		Uninsulated	Insulated	Imax	Standard Pack
Pre Assembled Shorting Links	2 pole	CA727/2	CA747/2	32 A	100
	3 pole	CA727/3	CA747/3	32 A	100
	4 pole	CA727/4	CA747/4	32 A	100
	10 pole	CA727/10	CA747/10	32 A	10
	100 pole				
Permanent Shorting Links	2 pole	CA703/1		32 A	100
	3 pole	CA704/1		32 A	100
	4 pole	CA705/1		32 A	100
	10 pole	CA732/10		32 A	100
	10 pole (Breakable)	CA732/10-A		32 A	100
	100 pole	CA732/100		32 A	10
	Short Sleeve & Screw for Permanent Shorting Links		CA607/S/Q		
Insulated External Shorting Links	2 pole	CA714/2		25 A	100
	3 pole	CA714/3		25 A	100
	4 pole	CA714/4		25 A	100
	10 pole	CA714/10		25 A	20
Test Socket		CA707/TS/01			100

# THERMOCOUPLE TERMINAL BLOCKS


These Terminal Blocks are used with thermocouple wires in measurement applications.

As per DIN 43713 & DIN 43714 the current carrying element of the Terminal Block is made of the same material as the Thermocouple wire. These special current carrying elements ensure that there is no loss of potential at the connecting points.

The following types of Thermocouple wires can be connected using standard Thermocouple Terminal Blocks


- 'K' type - Chromel (Ni/Cr), Alumel (Ni/Al)
- 'J' type - Iron (Fe), Constantan (Cu/Ni)
- 'T' type - Copper (Cu), Constantan (Cu/Ni)
- 'E' type - Chromel (Ni/Cr), Constantan (Cu/Ni)

## CTT2.5U

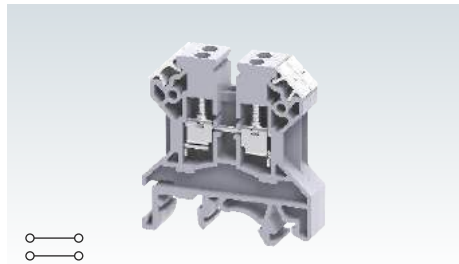

Width (Thickness) x Length	10 x 43 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	46.2 mm / 53.7 mm / 51.1 mm		
Connection Possibility as per	<b>IEC</b>	<b>UL - CSA</b>	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	22 - 12 AWG
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	22 - 16 AWG
	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	22 - 16 AWG
Wire Stripping Length	8 mm		
Ratings As Per	IEC60947-7-1		
Voltage	1000 V		
Current	10 A		
Torque	0.4 Nm		
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	4 KV / 3		
	<b>Type / Cat. No.</b>	<b>Suitable for Thermocouple Wire</b>	<b>Standard Pack</b>
Terminal Block	CTT2.5UK	K Type	50
	CTT2.5UJ	J Type	50
	CTT2.5UT	T Type	50
	CTT2.5UE	E Type	50
End Plate	EP2.5/4UN		50
Partition Plate	PP2.5/4UN		50
Separator Plate	SP2.5/4UN		100
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S		50 m
	CA701-15-1M / CA701-15-1M-S		25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802		50
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT		100
Screw Driver	SCS0.5/3	Blade size: 0.5 x 3.0 mm	10


### Typical Temperature Measuring circuit

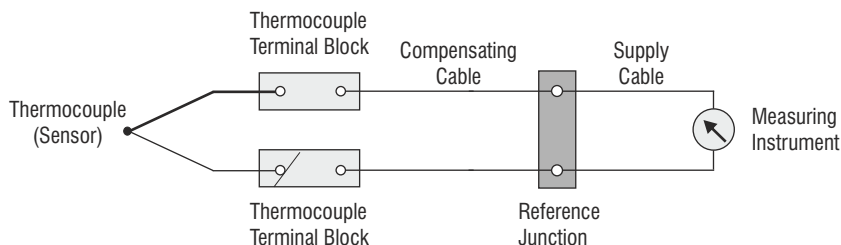


# TAB CONNECTION TERMINAL BLOCKS

The CTC4U Tab Connection Terminal Blocks offer quick connection possibility. The Terminal Blocks are suited for standard 'Fast On' type lugs.

The connection is achieved by pushing the lug / ferrule onto the tab blade of the Terminal Block.

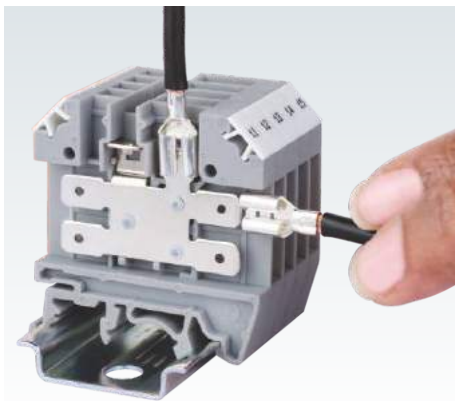


## CTC4U

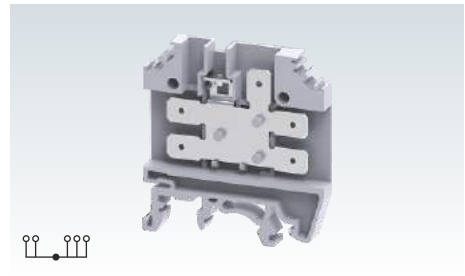

Width (Thickness) x Length	6 x 47 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	51.2 mm / 58.8 mm / 56.3 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
Wire Stripping Length	9 mm		
Ratings As Per	IEC60947-7-1		
Voltage	300 V		
Current	32 A		
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	2.5 KV / 3		
	Type / Cat. No.	Standard Pack	
Terminal Block	CTC4U	100	
End Plate	EPCTC4U	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50	
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100	

Shorting Links		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Permanent Shorting Links	2 pole	CA703/1		32 A	100
	3 pole	CA704/1		32 A	100
	4 pole	CA705/1		32 A	100
	10 pole	CA732/10		32 A	100
	100 pole	CA732/100		32 A	10
Short Sleeve & Screw for Permanent Shorting Links		CA807/S/Q/01			100
Test Socket		CA707/TS/01			100

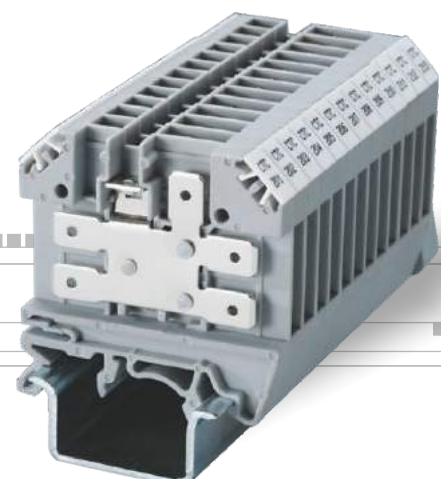



# TERMINAL BLOCKS WITH ELECTRONIC COMPONENTS

The following Standard Active Terminal Blocks are available:

## Diode / Resistor Terminal Blocks

### Terminal Blocks with Light Indication

CDL4U(O) - Connectwell Double Level Terminal Blocks are available with open current bars at the bottom level to which the electronic components can be soldered.


CDL4USP - Spacers can be used for covering custom electronic components, which may protrude from the CDL4U(O) Terminal Block.

Width (Thickness) x Length	6 x 55.5 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	55.7 mm / 63.1 mm / 60.3 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	9 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	500 V	600 V	300 V
Current	32 A	35 A	25 A
Torque	0.5 Nm	7 lb-in	7 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Diode	1N 4007		
Diode Reverse Voltage / Current	1000 V / 1 A		


	Type / Cat. No.	Standard Pack
End Plate	EPCDL4U	50
Spacer	CDL4USP	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
Marking Tags (Refer Pg. 224 for details)	CA509/K2WHT	100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Permanent Shorting Links	2 pole CA703/1	32 A	100
	3 pole CA704/1	32 A	100
	4 pole CA705/1	32 A	100
	10 pole CA732/10	32 A	100
Short Sleeve & Screw for Permanent Shorting Links	CA607/S/Q		100



Part No.	Application	Std. Pack
CDL4UED1	Arc suppression circuit for contactors & solenoid valves - D.C	100




Part No.	Application	Std. Pack
CDL4UED2	Arc suppression circuit for contactors & solenoid valves - D.C	100




Part No.	Application	Std. Pack
CDL4UED3	Diode circuit for reverse polarity protection	100





Part No.	Application	Std. Pack
CDL4UEDD1	Diode circuit for lamp testing	100





Part No.	Application	Std. Pack
CDL4UEDD2	Diode circuit for lamp testing	100




Part No.	Application	Std. Pack
CDL4UEDD3	Diode circuit for lamp testing	100




Part No.	Application	Std. Pack
CDL4UEDD4	Diode circuit for lamp testing	100




Part No.	Application	Std. Pack
CDL4UED4	Diode circuit for lamp testing with LED series resistance	100




Part No.	Application	Std. Pack
CDL4UEDD5	Diode circuit for lamp testing with LED series resistance	100





Part No.	Application	Std. Pack
CKT4UD1	Arc suppression circuit for contactors & solenoid valves - D.C	100




Part No.	Application	Std. Pack
CKT4UD2	Arc suppression circuit for contactors & solenoid valves - D.C	100




Part No.	Diode Type	Std. Pack
CF4SPD1	1N4007	50
CF4SPD2	1N5408	50
CF4SPD3	1N5820	50





Part No.	Application	Std. Pack
CDL4UEN1	AC Voltage indicator with Neon lamp	100





Part No.	Application	Std. Pack
CDL4UELD5	AC Voltage indicator with LED	100




Part No.	Application	Std. Pack
CDL4UELD3	AC Voltage indicator with LED	100





Part No.	Application	Std. Pack
CDL4UELD4	AC Voltage indicator with LED	100





Part No.	Application	Std. Pack
CDL4UELD1	DC Voltage indicator with LED	100





Part No.	Application	Std. Pack
CDL4UELD2	DC Voltage indicator with LED	100



Part No.	Application	Std. Pack
CDL4UEL1	DC Voltage indicator with LED	100



Part No.	Application	Std. Pack
CDL4UEL2	DC Voltage indicator with LED	100



Part No.	Application	Std. Pack
CDL4U(O)	Basic terminal for soldering electronic components	100



# SURGE SUPPRESSION TERMINAL BLOCKS

These Terminal Blocks are designed to protect a single line against a longitudinal (line / earth) surge, thereby protecting distribution and input.

#### Note:

CDL4U(E)SDU - For D.C. Application


CDL4U(E)SDB - For A.C. Application

A - Anode

K - Cathode

SDUA - 48V, 3.2A, 400V A.C are available in SDUB type at current rating 4A.

#### Circuit Diagram





Width (Thickness) x Length	18 x 55.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	55.7 mm / 63.1 mm / 60.3 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid	0.2 - 6.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>
with TWIN Ferrule / Lug	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>
Wire Stripping Length	9 mm	
Type of Connection	4 Screw Clamps	
Rated Connection Capacity	0.5 - 4 sq.mm / 22-10 AWG	
Voltage Rating	75 V, 90 V, 230 V, 600 V, 1000 V DC	
Impulse Discharge Current	20 KA (8/20 $\mu$ s)	
Alternating Discharge Current at Hz	20 A	
Response Time	100 ms	
Normal Current	10 A	
Capacitance	< 1.5 pf	
Insulation Material / Material Group	Polyamide 6,6 / 1	
Approvals		



	Type / Cat. No.	Standard Pack
Terminal Block	CDL4UELA90V	32
End Plate	EPCDL4U	50
Spacer	CDL4USP	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802 / CA202	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2WHT	100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

# SURGE SUPPRESSION TERMINAL BLOCKS

## CDL4UE3LA

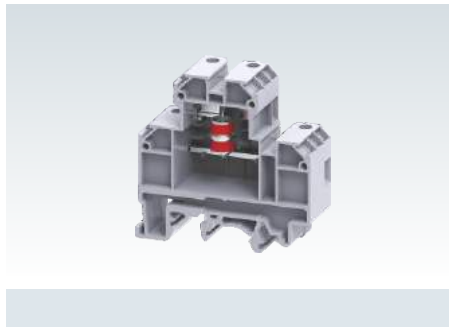


## CDL4UEMOV

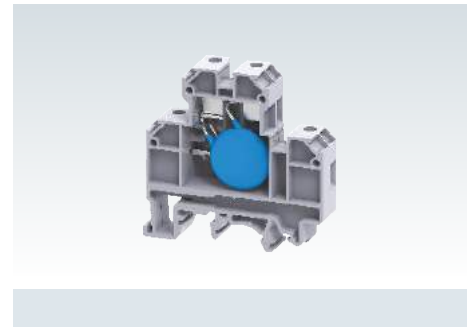

Circuit Diagram

Width (Thickness) x Length	18 x 55.5 mm		12 x 55.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	55.7 mm / 63.1 mm / 60.3 mm		55.7 mm / 63.1 mm / 60.3 mm	
Connection Possibility as per	IEC	UL - CSA	IEC	UL - CSA
	With 1 Conductor per clamp	Stranded / Flexible 0.2 - 4.0 mm <sup>2</sup> Solid 0.2 - 6.0 mm <sup>2</sup> with Ferrule / Lug 0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG 22 - 10 AWG 22 - 10 AWG	0.2 - 4.0 mm <sup>2</sup> 0.2 - 6.0 mm <sup>2</sup> 0.2 - 4.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	Stranded / Flexible 0.2 - 2.5 mm <sup>2</sup> with TWIN Ferrule / Lug 0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG 22 - 12 AWG	0.2 - 2.5 mm <sup>2</sup> 0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG 22 - 12 AWG
Wire Stripping Length	9 mm		9 mm	
Type of Connection	4 Screw Clamps		4 Screw Clamps	
Rated Connection Capacity	0.5 - 4 sq.mm / 22-10 AWG		0.5 - 4 sq.mm / 22-10 AWG	
Voltage Rating	90 V, 230 V, 350 V, 600 V DC		30 V, 60 V, 75 V, 130 V, 275 V, 460 V, 510 V, 625 V, 680 V A.C.	
Impulse Discharge Current	10 KA (8/20μs)		2 KA - 6.5 KA (8/20μs)	
Alternating Discharge Current at Hz	10 A			
Response Time	100 ms		< 25 ns	
Capacitance	< 1.0 pf		100 - 20000 pf	
Insulation Material / Material Group	Polyamide 6,6 / 1		Polyamide 6,6 / 1	
Approvals				
	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	CDL4UE3LA(90V)	32	CDL4UEMOV-30V CDL4UEMOV-60V	52 52
End Plate	EPCDL4U	50	EPCDL4U	50
Spacer	CDL4USP	50	CDL4USP	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802 / CA202	50	CA702 / CA802 / CA202	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2WHT	100	CA509/K2WHT	100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

**CTLG2.5EMOV**



6 x 87.5 mm

66.0 mm / 74.0 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 16 AWG
0.2 - 1.5 mm <sup>2</sup>	22 - 16 AWG

9 mm

3 Screw Clamps

0.5 - 2.5 sq.mm / 22-12 AWG

Upto 275 V

2 KA - 6.5 KA (8/20μs)

< 25 ns



100 - 20000 pf

Polyamide 6,6 / 1



Type / Cat. No.	Standard Pack
CTLG2.5EMOV-275V	50
EPCTLG2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K2GWHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

**CDL4UESD**

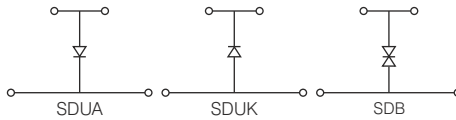

12 x 55.5 mm

55.7 mm / 63.1 mm / 60.3 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

9 mm

4 Screw Clamps

0.5 - 4 sq.mm / 22-10 AWG

12 VDC to 48 VDC / 12 VAC to 160 VAC

1.5 KA



1 ns (D.C) / 5 ns (A.C)

Polyamide 6,6 / 1



Type / Cat. No.	Standard Pack
CDL4UESDUA24V	52
CDL4UESDB-160V	52
EPCDL4U	50
CDL4USP	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K2WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

**CDL4UERC**



18 x 55.5 mm

55.7 mm / 63.1 mm / 60.3 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

9 mm

4 Screw Clamps

0.5 - 4 sq.mm / 22-10 AWG

250 VAC / 630 VDC

20 A


Polyamide 6,6 / 1



Type / Cat. No.	Standard Pack
CDL4UERC0-0.1MF	32
CDL4UERC0.22MF	32
EPCDL4U	50
CDL4USP	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K2WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

# CY SERIES SCREW CLAMP TERMINAL BLOCKS

These next generation Terminal Blocks use the proven & robust Connectwell screw clamp system for the most stringent application requirements. The CY series terminals offer various advantages to the user which includes Push-In jumpers, unified and minimal accessory requirements and ability to affix marking tags on the top surface.

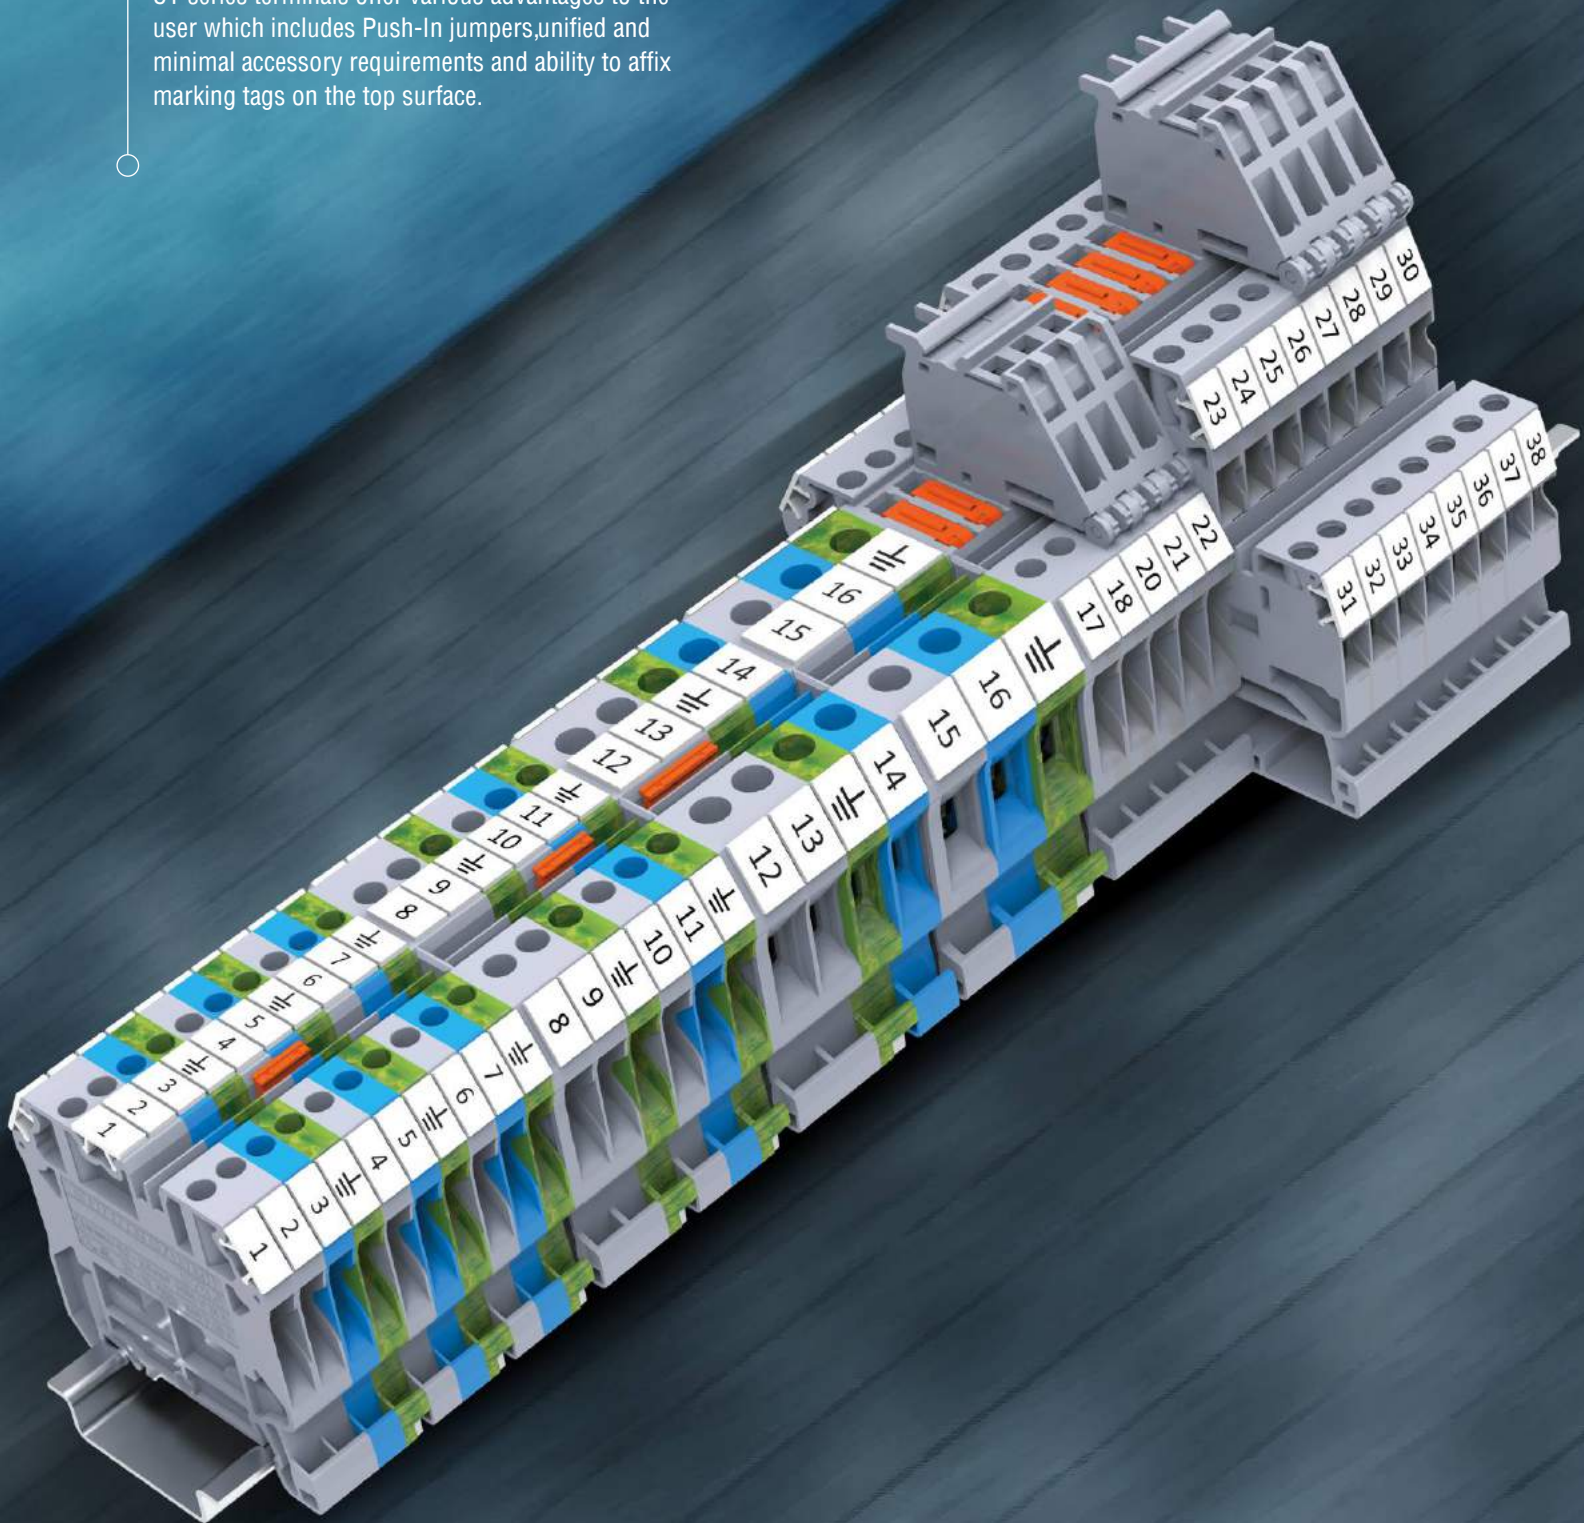

## CY SERIES SCREW CLAMP TERMINAL BLOCKS



**Feed Through**

**77 - 78**



**Ground / Earth**

**79 - 80**




**Multiple Connection**

**81 - 82**



**Multiple Level**

**83 - 86**



**Fuse Terminal**




**87 - 90**



**Disconnect & Test**

**91 - 92**






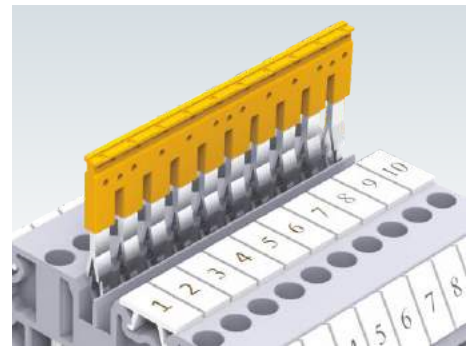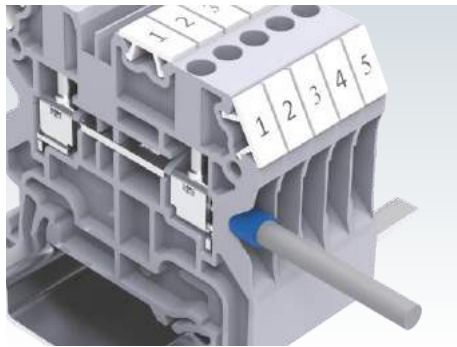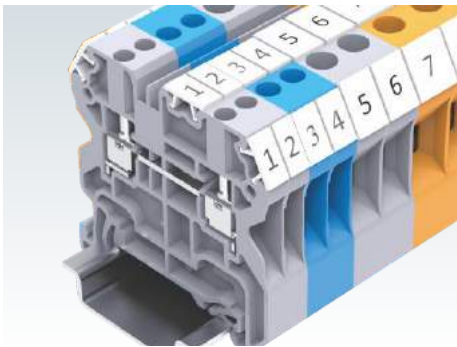

New compact CY series Terminal Blocks are applicable for space saving. These Terminal Block ranging from 0.2 to 10 sq.mm in same profile with different pitch.

A unique design in the plastic housing of the Terminal Block facilitates ease of wire entry. Wires can be used with or without ferrules / Lugs.




Easy to use push in jumpers for shorting Terminal Blocks are now available in 2,3,4, & 10 pole configuration

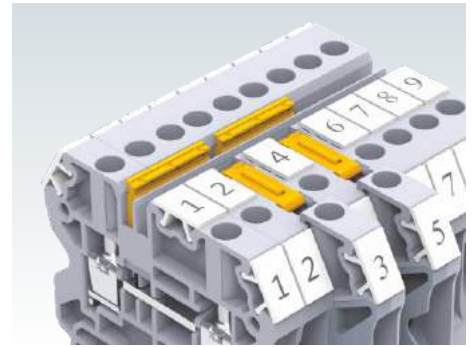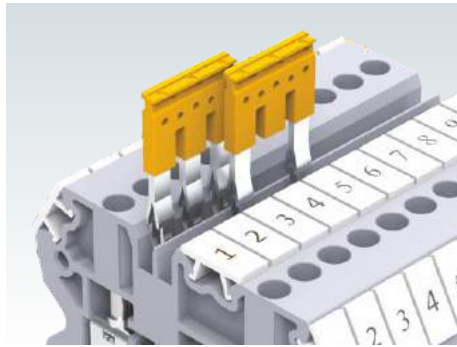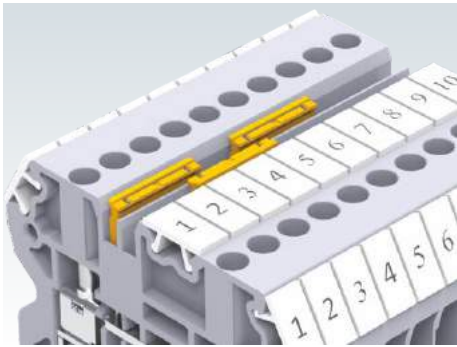

The possibility of using 2 independent rows for bridging enables the creation of various circuit combinations. Jumpers can be marked with a felt tip pen on the recess provided on top, to clearly indicate shorted positions.

Specific Terminal Blocks in an assembly can be shorted by breaking intermediate contacts from the standard jumpers.


The jumper and marking tag position is aligned across different types of CY series Terminal Blocks. This facilitates shorting and marking adjacent terminals with different functionalities.

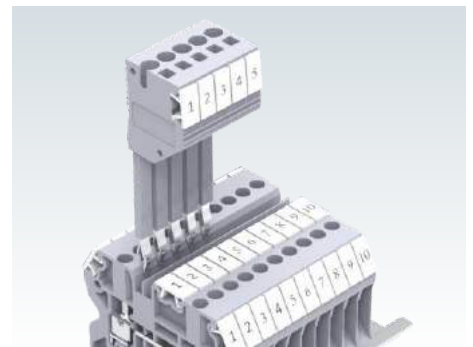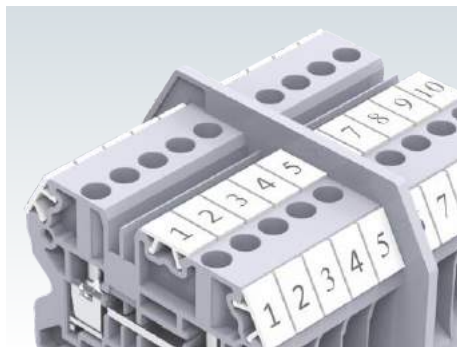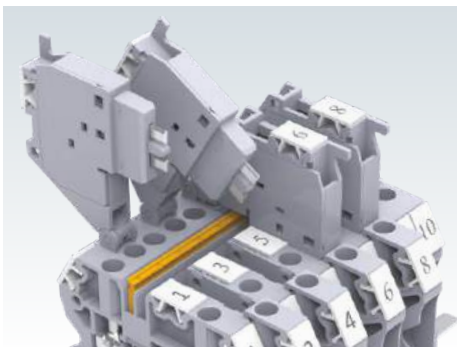


Feed through Terminal Blocks can be simultaneously shorted in an alternating configuration with fuse & Disconnecting Terminal Blocks using Push in jumpers.

Partition Plates can be individually mounted on Din rails between Terminals Blocks to provide electrical and visual separation.


Specially designed Test Plugs are available for CY series Terminal Blocks for quick testing and measurement.

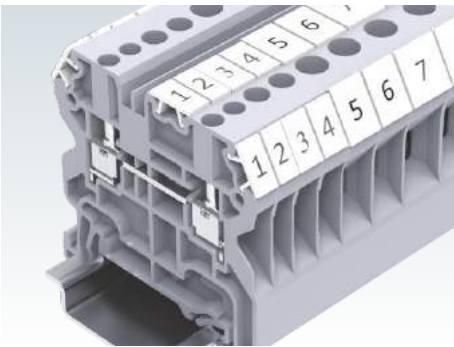


A high torque clamping system on the screw clamp Terminal Blocks ensures safe, gas tight connections. While cold forged, rolled threaded screws ensure highly reliable connections. Standard feed through are of same dimensions with difference in thickness.

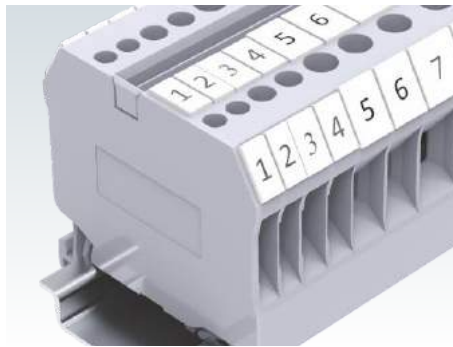


A single end plate can be used for any of the feed through terminal blocks upto 10 sq.mm wires.

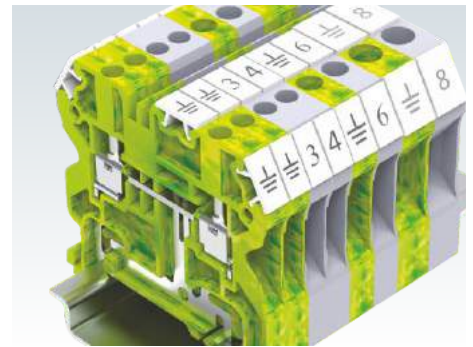


Same profile grounding terminals are clearly identified with a green-yellow housing. Their shape and thickness is identical to the Feed Trough Terminal Blocks

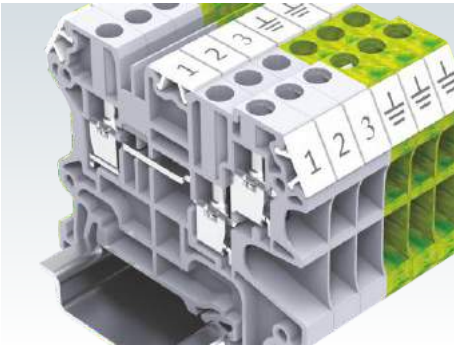


Multi connection Terminal Blocks are used for applications involving more than one same potential wires to be connected

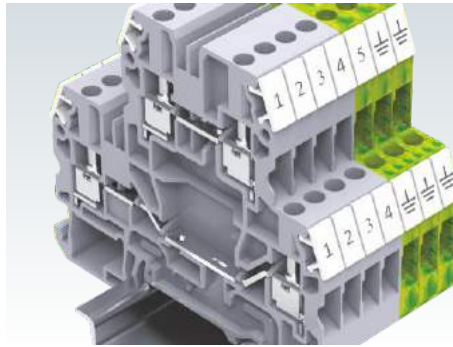

Double level Terminal Blocks enable high density wiring. Each Level can be independently shorted to suit various applications. These Terminal Blocks are an ideal choice for space saving applications.

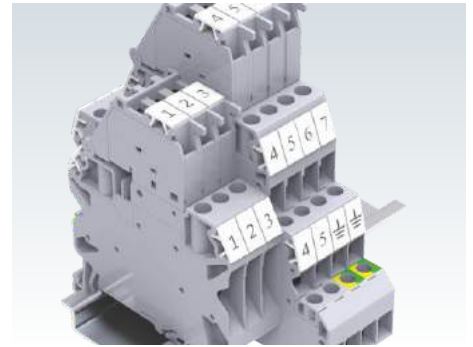

Universal voltage rating of 6 - 60 V & 110 - 240V is available on Fuse Terminal Blocks with offline indication. Both AC & DC circuits can be connected without any polarization requirement. Double level Terminal Blocks are an ideal choice for space saving applications.

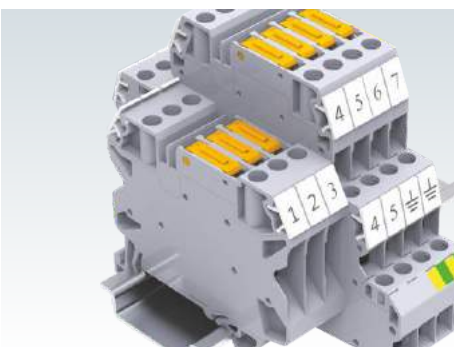


The Screw clamp knife disconnect terminal system enables isolation of circuits. A standard test plug can be used with these Terminal Blocks. Double level Terminal Blocks are an ideal choice for space saving applications.

# FEED THROUGH TERMINAL BLOCKS

CY series screw clamp Terminal Blocks are the next generation, compact terminals. These series of Terminal Blocks have an improved 1000 V rating as per IEC guidelines. The new CY series terminals have a much wider range for wire terminations.

Cross connection of these Terminal Blocks can be done using insulated push in jumpers available in 2,3,4 and 10 pole configurations.


## CY2.5



Width (Thickness) x Length	5 x 50 mm				
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	49 mm / 56.5 mm				
Connection Possibility as per	IEC		UL - CSA		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 14 AWG		
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG		
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 14 AWG		
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.5 - 1.5 mm <sup>2</sup>	20 - 16 AWG		
Wire Stripping Length	8 mm				
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7	
Voltage	1000 V	600 V	600 V	630 V	
Current	24 A	20 A	20 A	21 A	
Torque	0.4 Nm	4.5 lb.in	4.5 lb.in	0.4 Nm	
Approval					
Insulation Material / Material Group	Polyamide 6,6 / 1				
Rated Impulse Voltage / Pollution Degree	8 KV / 3				
	Type / Cat. No.		Standard Pack		
Terminal Block	Grey	CY2.5	100		
	Blue	CY2.5BU	100		
	Ground / Earth	CYG2.5 (Refer Pg. 79 for details)	100		
End Plate		EPCY2.5/10	50		
Partition Plate		PPCY2.5/10	20		
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m		
		CA701-15-1M / CA701-15-1M-S	25 m		
End Clamp (Refer Pg. 220 for details)		CA702 / CA802 / CA103	50		
Test Plug		TX2.5	50		
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT	100		
Screw Driver		SCS0.5/3	Blade size: 0.5 x 3.0 mm	10	
	Type / Cat. No.		Imax	Standard Pack	
Shorting Links	2 pole	JX2.5/2	24 A	100	
	3 pole	JX2.5/3	24 A	50	
	4 pole	JX2.5/4	24 A	50	
	5 pole	JX2.5/5	24 A	50	
	6 pole	JX2.5/6	24 A	10	
	7 pole	JX2.5/7	24 A	10	
	8 pole	JX2.5/8	24 A	10	
	10 pole	JX2.5/10	24 A	10	
	Step Down Shorting Links				



CY4



6 x 50 mm

49 mm / 56.5 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A
0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CY4	100
CY4BU	100
CY4G (Refer Pg. 80 for details)	100
EPCY2.5/10	50
PPCY2.5/10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

CY6



8 x 50 mm

49 mm / 56.5 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 10.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.5 - 4.0 mm <sup>2</sup>	20 - 12 AWG

10 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
41 A	50 A	50 A	36 A
0.8 Nm	11 lb.in	11 lb.in	0.8 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CY6	100
CY6BU	100
CY6G (Refer Pg. 80 for details)	100
EPCY2.5/10	50
PPCY2.5/10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JY6/2	41 A	100
JY6/2.5	24 A	20

CY10



10 x 50 mm

49 mm / 56.5 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.5 - 6.0 mm <sup>2</sup>	

11 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
57 A	65 A	65 A	51 A
1.2 Nm	14 lb.in	14 lb.in	1.2 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CY10	50
CY10BU	50
CY10G (Refer Pg. 80 for details)	50
EPCY2.5/10	50
PPCY2.5/10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K10WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JY10/2	57 A	20
JY10/2.5	24 A	20



# GROUND / EARTH TERMINAL BLOCKS

CYG series are earthing Terminal Blocks with specially designed alloy feet which help in achieving very low contact resistance and vibration proof grounding with the DIN rails. They are green / yellow colour coded as per industry standards.


Cross connection of these Terminal Blocks can be done using insulated push in links.

Multi connect 3 wire & 4 wire terminals eliminate reliability problems encountered when there is a need to connect multiple wires in a single Terminal Block.

		CYG2.5			
Width (Thickness) x Length		5 x 50 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		49 mm / 56.5 mm			
Connection Possibility as per		IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>		24 - 14 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>		24 - 12 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>		24 - 14 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.5 - 1.5 mm <sup>2</sup>		20 - 16 AWG	
Wire Stripping Length		8 mm			
Ratings As Per		IEC60947-2	UL-1059	CSA22.2-158	IEC60079-7
Torque		0.4 Nm	4.5 lb.in	4.5 lb.in	0.4 Nm
Approval					
Insulation Material / Material Group		Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree		8 KV / 3			
		Type / Cat. No.		Standard Pack	
Terminal Block		CYG2.5		100	
End Plate		EPCY2.5/10		50	
Partition Plate		PPCY2.5/10		20	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S		50 m	
		CA701-15-1M / CA701-15-1M-S		25 m	
End Clamp (Refer Pg. 220 for details)		CA702 / CA802 / CA103		50	
Test Plug		TX2.5		50	
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT		100	
Screw Driver		SCS0.5/3 Blade size: 0.5 x 3.0 mm		10	
		Type / Cat. No.		Imax	
Shorting Links				Standard Pack	
2 pole		JX2.5/2		24 A	
3 pole		JX2.5/3		24 A	
4 pole		JX2.5/4		24 A	
5 pole		JX2.5/5		24 A	
6 pole		JX2.5/6		24 A	
7 pole		JX2.5/7		24 A	
8 pole		JX2.5/8		24 A	
10 pole		JX2.5/10		24 A	
Step Down Shorting Links					

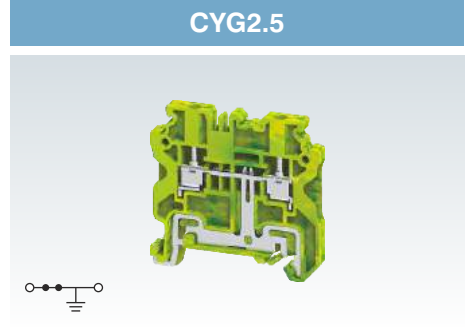

**CYG4**



6 x 50 mm

49 mm / 56.5 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-2 UL-1059 CSA22.2-158 IEC60079-7

0.5 Nm 4.5 lb.in 4.5 lb.in 0.5 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYG4	100
EPCY2.5/10	50
PPCY2.5/10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

**CYG6**



8 x 50 mm

49 mm / 56.5 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 10.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.5 - 4.0 mm <sup>2</sup>	20 - 12 AWG

10 mm

IEC60947-7-2 UL-1059 CSA22.2-158 IEC60079-7

0.8 Nm 11 lb.in 11 lb.in 0.8 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYG6	100
EPCY2.5/10	50
PPCY2.5/10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K8WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JY6/2	41 A	100
JYS6/2.5	24 A	20

**CYG10**



10 x 50 mm

49 mm / 56.5 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.5 - 6.0 mm <sup>2</sup>	

11 mm

IEC60947-7-2 UL-1059 CSA22.2-158 IEC60079-7

1.2 Nm 14 lb.in 14 lb.in 1.2 Nm



Polyamide 6,6 / 1

8 KV / 3


Type / Cat. No.	Standard Pack
CYG10	50
EPCY2.5/10	20
PPCY2.5/10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K10WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JY10/2	57 A	20
JYS10/2.5	24 A	20

# MULTIPLE CONNECTION TERMINAL BLOCKS

CY series multi connect 3 wire & 4 wire screw clamp Terminal Blocks are used to eliminate reliability problems encountered when there is a need to connect multiple wires in a single Terminal Block.

## CY4/3

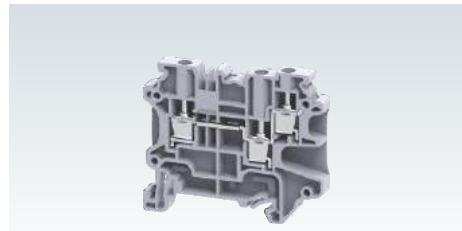


Width (Thickness) x Length	6 x 58.8 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	50.7 mm / 58.2 mm			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	24 - 12 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG	
Wire Stripping Length	8 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	1000 V	600 V	600 V	630 V
Current	32 A	30 A	30 A	28 A
Torque	0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm
Approval				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3			

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CY4/3	50
	Blue	CY4/3BU	50
	Ground / Earth	CYG4/3	50
End Plate	EPCY4/3	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA702 / CA802 / CA103	50	
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100	
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX4/2	32 A	100
	3 pole	JX4/3	32 A	50
	4 pole	JX4/4	32 A	50
	5 pole			
	6 pole			
	7 pole			
	8 pole	JX4/8	32 A	10
	10 pole	JX4/10	32 A	10

**CY4/4**



6 x 69.7 mm

50.7 mm / 58.2 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A
0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm





Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CY4/4	50
CY4/4BU	50
CYG4/4	50
EPCY4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

**CYG4/3**



6 x 58.8 mm

50.7 mm / 58.2 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-2 UL-1059 CSA22.2-158 IEC60079-7

0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm
0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm





Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYG4/3	50
EPCY4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

**CYG4/4**



6 x 69.7 mm

50.7 mm / 58.2 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-2 UL-1059 CSA22.2-158 IEC60079-7

0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm
0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYG4/4	50
EPCY4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10



# MULTIPLE LEVEL TERMINAL BLOCKS

CYDL2.5 is the next generation compact double level Spring Clamp Terminal Block. This Terminal Block is used in high density wiring applications.


Interconnections / shorting is possible at both levels. This Terminal Block is suitable for 1000 V rating.


CYDL2.5(I.S) is double level internally shorted spring clamp Terminal Block. This is an ideal choice for distribution application.







CYDLG2.5 is double level Terminal Block with an additional grounding point for terminating grounding cables on the lower level of the terminal block while the top level is a standard feed through terminal block. The earth connection is made by snapping the terminal on the Din rail. This separate connection point is

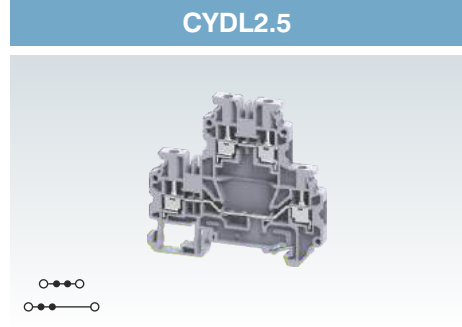
appropriately identified by the green-yellow imprint on its top.

CYDLG2.5(I.S) is double level ground Terminal Block with 4 connection points for grounding wires. It is available in a standard green yellow colour to indicate the grounding connection.


Width (Thickness) x Length		5 x 70.5 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		65.9 mm / 73.4 mm			
Connection Possibility as per		IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>		24 - 12 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>		24 - 10 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>		24 - 12 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>		24 - 20 AWG	
Wire Stripping Length		8 mm			
Ratings As Per		IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage		1000 V	600 V	600 V	630 V
Current		24 A	20 A	20 A	21 A
Approval					
Insulation Material / Material Group		Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree		8 KV / 3			



		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CYDL2.5	50
	Blue	CYDL2.5BU	50
	Ground / Earth	CYDLG2.5(I.S)	50
End Plate		EPCYDL2.5/4	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA702 / CA802 / CA103	50
Test Plug		TX2.5	50
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT	100
Screw Driver		SCS0.5/3 Blade size: 0.5 x 3.0 mm	10

Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10

**CYDL2.5(I.S)**



5 x 70.5 mm

65.9 mm / 73.4 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.2 - 1.0 mm<sup>2</sup>      24 - 20 AWG

8 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
24 A	20 A	20 A	21 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYDL2.5(I.S)	50
EPCYDL2.5/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
TX2.5	50
CA509/K5WHT	100
SCS0.5/3      Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

**CYDLG2.5**



5 x 70.5 mm

65.9 mm / 73.4 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.2 - 1.0 mm<sup>2</sup>      24 - 20 AWG

8 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
24 A	20 A		21 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYDLG2.5	50
EPCYDL2.5/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
TX2.5	50
CA509/K5WHT	100
SCS0.5/3      Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

**CYDLG2.5(I.S)**



5 x 70.5 mm

65.9 mm / 73.4 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.2 - 1.0 mm<sup>2</sup>      24 - 20 AWG

8 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
24 A	20 A		



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYDLG2.5(I.S)	50
EPCYDL2.5/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
TX2.5	50
CA509/K5WHT	100
SCS0.5/3      Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

# MULTIPLE LEVEL TERMINAL BLOCKS

CYDL4 is the next generation compact double level Spring Clamp Terminal Block. This Terminal Block is used in high density wiring applications.

Interconnections / shorting is possible at both levels. This Terminal Block is suitable for 1000 V rating.

CYDL4(I.S) is double level internally shorted spring clamp Terminal Block. This is an ideal choice for distribution application.







CYDLG4 is double level Terminal Block with an additional grounding point for terminating grounding cables on the lower level of the terminal block while the top level is a standard feed through terminal block. The earth connection is made by snapping the terminal on the Din rail. This separate connection point is


appropriately identified by the green-yellow imprint on its top.

CYDLG4(I.S) is double level ground Terminal Block with 4 connection points for grounding wires. It is available in a standard green yellow colour to indicate the grounding connection.


Width (Thickness) x Length		6 x 70.5 mm
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		65.9 mm / 73.4 mm
Connection Possibility as per		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid with Ferrule / Lug	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
Wire Stripping Length		9 mm
Ratings As Per		
Voltage		1000 V    600 V    600 V    630 V
Current		32 A    30 A    30 A    28 A
Torque		0.5 Nm    4.5 lb.in    4.5 lb.in    0.5 Nm
Approval		

Insulation Material / Material Group	Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree	8 KV / 3

Terminal Block	Grey Blue Ground / Earth
End Plate	
Partition Plate	
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Marking Tags (Refer Pg. 224 for details)	
Screw Driver	

Shorting Links	
Shorting Link	
	2 pole
	3 pole
	4 pole
	8 pole
	10 pole

## CYDL4

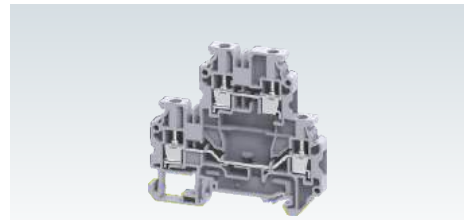

IEC		UL - CSA	
0.2 - 4.0 mm <sup>2</sup>	0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG	
0.2 - 4.0 mm <sup>2</sup>		24 - 12 AWG	
0.5 - 2.5 mm <sup>2</sup>		20 - 14 AWG	



Type / Cat. No.	Standard Pack
-----------------	---------------

CYDL4	50
CYDL4BU	50
CYDLG4(I.S.)	50
EPCYDL2.5/4	50
PPCYDL2.5/4	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5    Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

### CYDL4(I.S)



6 x 70.5 mm

65.9 mm / 73.4 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A
0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYDL4(I.S)	50

EPCYDL2.5/4	50
PPCYDL2.5/4	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

### CYDLG4



6 x 70.5 mm

65.9 mm / 73.4 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A
0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYDLG4	50

EPCYDL2.5/4	50
PPCYDL2.5/4	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

### CYDLG4(I.S)



6 x 70.5 mm

65.9 mm / 73.4 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-2	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A
0.5 Nm	4.5 lb.in	4.5 lb.in	0.5 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CYDLG4(I.S)	50

EPCYDL2.5/4	50
PPCYDL2.5/4	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

# FUSE TERMINAL BLOCKS


These Terminal Blocks are used in electrical and control systems which require fuse protection.

CYF4 series fuse terminals have a thickness of 6 mm with a provision for using push in shorting links. These Terminal Blocks are completely closed type and do not need separate end plate.

CYDLF4 terminal has an additional feed through connection level.


CYDLGF4 terminal has a feed through connection level along with ground connection point in addition to a standard hinged fuse carrier.

## CYF4

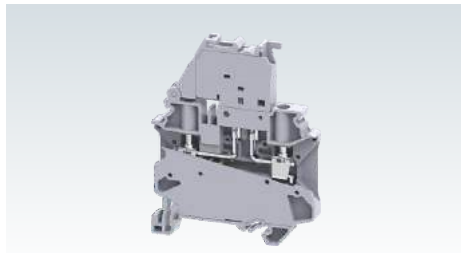


Width (Thickness) x Length	6 x 58.8 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	72.4 mm / 79.9 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
	with TWIN Ferrule / Lug	0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG
Wire Stripping Length	9 mm		
Ratings As Per	IEC60947-7-3	UL-1059	CSA22.2-158
Voltage	1000 V	600 V	600 V
Current	10 A	10 A	10 A
Torque	0.5 Nm	4.5 lb-in	4.5 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	6 KV / 3		
Fuse Size	Ø5 x 20, Ø5 x 25 mm		

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CYF4	50
	Blue	CYF4BU	50
	Black	CYF4BK	50
	With LED for 6 - 60 V AC/DC	CYF4L6-60V	50
	With LED for 110 - 240 V AC/DC	CYF4L110-240V	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50	
Marking Tags	On Terminal	CA509/K6WHT	100
	On Fuse Carrier	CA509/K6WHT	100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	

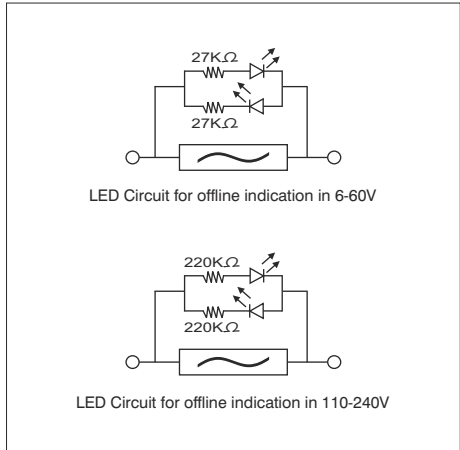

	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Shorting Links	JX4/2	32 A	100
	JX4/3	32 A	50
	JX4/4	32 A	50
	JX4/8	32 A	10
	JX4/10	32 A	10

**CYDLF4**



6 x 94.5 mm  
90.9 mm / 98.4 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-3 UL-1059

500 V	300 V		
10 A	10 A		
32 A	30 A		
0.5 Nm	4.5 lb-in		



Polyamide 6,6 / 1


6 KV / 3

Ø5 x 20, Ø5 x 25 mm

Type / Cat. No.	Standard Pack
CYDLF4	50
CYDLF4L6-60V	50
CYDLF4L110-240V	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

**CYDLGF4**

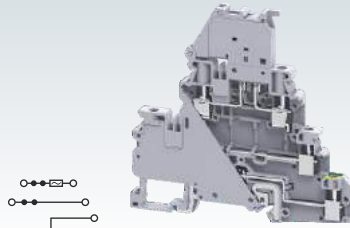

6 x 94.5 mm  
90.9 mm / 98.4 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-3 UL-1059

500 V	300 V		
10 A	10 A		
32 A	30 A		
0.5 Nm	4.5 lb-in		



Polyamide 6,6 / 1


6 KV / 3

Ø5 x 20, Ø5 x 25 mm

Type / Cat. No.	Standard Pack
CYDLGF4	50
CYDLGF4L6-60V	50
CYDLGF4L110-240V	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

**CYDLF4FT**

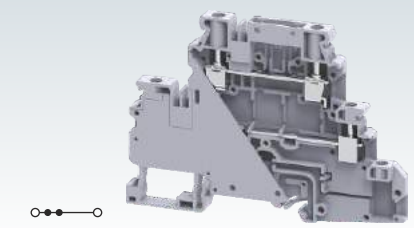

6 x 94.5 mm  
67.6 mm / 75.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.5 - 2.5 mm <sup>2</sup>	24 - 14 AWG

9 mm

IEC60947-7-1 UL-1059

630 V	300 V		
10 A	10 A		
32 A	30 A		
0.5 Nm	4.5 lb-in		



Polyamide 6,6 / 1


6 KV / 3

Type / Cat. No.	Standard Pack
CYDLF4FT	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10



Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	50
JX4/10	32 A	10

# FUSE TERMINAL BLOCKS

## CYDLGF4FT

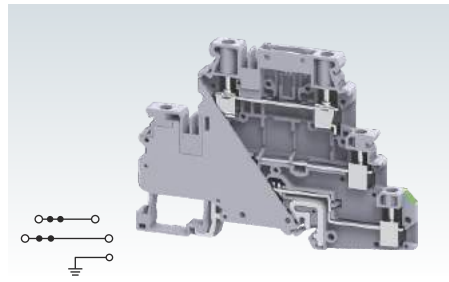

## CYDLF4LR


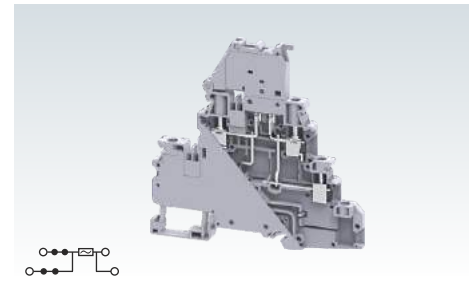


Width (Thickness) x Length	6 x 94.5 mm		6 x 94.5 mm	
Height with DIN 35 x 7.5 / 35 x 15	67.6 mm / 75.1 mm		67.6 mm / 75.1 mm	
Connection Possibility as per	IEC	UL - CSA	IEC	UL - CSA
	With 1 Conductor per clamp	Stranded / Flexible Solid with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup> 0.2 - 6.0 mm <sup>2</sup> 0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG 24 - 12 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup> 0.5 - 2.5 mm <sup>2</sup>	24 - 16 AWG 24 - 14 AWG	0.2 - 4.0 mm <sup>2</sup> 0.2 - 6.0 mm <sup>2</sup> 0.2 - 4.0 mm <sup>2</sup> 0.2 - 1.5 mm <sup>2</sup> 0.5 - 2.5 mm <sup>2</sup>
Wire Stripping Length	9 mm		9 mm	
Ratings As Per	IEC60947-7-1	UL-1059	IEC60947-7-1	UL-1059
Voltage	630 V	300 V	630 V	300 V
	Current	32 A	30 A	10 A
Torque	0.5 Nm	4.5 lb-in	0.5 Nm	4.5 lb-in
Approvals				
Insulation Material / Material Group	Polyamide 6,6 / 1		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	6 KV / 3		6 KV / 3	

		Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	Grey	CYDLGF4FT	50	CYDLF4LR	50
	Blue				
	Black				
	With LED for 6 - 60 V AC/DC			CYDLF4LRL6-60V	50
	With LED for 110 - 240 V AC/DC			CYDLF4LRL110-240V	50
Mounting Rail	(Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp	(Refer Pg. 220 for details)	CA702 / CA802 / CA202	50	CA702 / CA802 / CA202	50
Marking Tags	(Refer Pg. 224 for details)	CA509/K6WHT	100	CA509/K6WHT	100
Screw Driver		SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Shorting Link	2 pole	JX4/2	32 A	100	JX4/2	32 A	100
	3 pole	JX4/3	32 A	50	JX4/3	32 A	50
	4 pole	JX4/4	32 A	50	JX4/4	32 A	50
	8 pole	JX4/8	32 A	50	JX4/8	32 A	50
	10 pole	JX4/10	32 A	10	JX4/10	32 A	10

## CYDLGF4LR



6 x 94.5 mm

67.6 mm / 75.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.5 - 2.5 mm <sup>2</sup>	24 - 14 AWG

9 mm

IEC60947-7-1 UL-1059

630 V	300 V		
10 A	10 A		

0.5 Nm	4.5 lb-in		
--------	-----------	--	--



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CYDLGF4LR	50
CYDLGF4LRL6-60V	50
CYDLGF4LRL110-240V	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	50
JX4/10	32 A	10



# DISCONNECT & TEST TERMINAL BLOCKS

These blocks are used for measuring, control and regulatory circuits.

In CYK4 terminals, disconnection is achieved by lifting a lever which operates the knife contact.


Specially designed socket headed screws act as test monitoring points in these Terminal Blocks.

Standard JX series push in jumpers can be used for interconnection.

CYDLK4 terminal is a double level disconnect Terminal Block with knife contact disconnect function at the top level and a feed through at the bottom level.

In the CYDLGK4 terminal, a grounding wire connection point is available in addition to the feed through and disconnect functionality.

## CYK4




Width (Thickness) x Length	6 x 58.8 mm	
Height with DIN 35 x 7.5 / 35 x 15	51.5 mm / 56.6 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid	0.2 - 6.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
	Stranded / Flexible with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	1000 V	600 V
Current	28 A	26 A
Torque	0.5 Nm	4.5 lb-in
Approvals		
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	6 KV / 3	
	<b>Type / Cat. No.</b>	<b>Standard Pack</b>
Terminal Block	CYK4	50
	CYK4BU	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack
Shorting Link	2 pole	JX4/2	32 A	100
	3 pole	JX4/3	32 A	50
	4 pole	JX4/4	32 A	50
	8 pole	JX4/8	32 A	50
	10 pole	JX4/10	32 A	10

\* Shorting link current should not exceed more than Terminal Block current rating

**CYDLK4**



6 x 94.5 mm

67.6 mm / 75.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

9 mm

IEC60947-7-1 UL-1059

630 V	300 V		
20 A	16 A		
32 A	30 A		
0.5 Nm	4.5 lb-in		





Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CYDLK4	50
CYDLK4BU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	50
JX4/10	32 A	10

**CYDLGK4**



6 x 94.5 mm

67.6 mm / 75.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	24 - 14 AWG

9 mm

IEC60947-7-1 UL-1059

630 V	300 V		
20 A	16 A		
32 A	30 A		
0.5 Nm	4.5 lb-in		



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CYDLGK4	50
CYDLGK4BU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K6WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	50
JX4/10	32 A	10

















# CX SERIES SPRING CLAMP TERMINAL BLOCKS


Spring Clamp Terminal Blocks are suitable for all types of wires. Connections can be made by simply stripping the wire of its insulation to the recommended length and inserting it into the terminal where the wire is held against the current carrying part by a pre-stressed Spring Clamp.




CONNECTORWELL  
CX2.5  
102-2 Core 1000 V 21 A  
24-2 AWG 600 V 20 A

## CX SERIES SPRING CLAMP TERMINAL BLOCKS


	<b>Feed Through</b>	<b>97 - 99</b>
	<b>Multiple Connection</b>	<b>100 - 103</b>
	<b>Ground / Earth</b>	<b>104 - 108</b>
	<b>Multiple Level</b>	<b>109 - 112</b>
	<b>With Electronic Components</b>	<b>113 - 114</b>
	<b>Fuse Terminal</b>	<b>115 - 116</b>
	<b>Disconnect &amp; Test</b>	<b>117 - 118</b>
	<b>Micro</b>	<b>119 - 120</b>
	<b>SIDE ENTRY FEED THROUGH</b>	<b>121 - 122</b>
	<b>SIDE ENTRY GROUND / EARTH</b>	<b>122</b>
	<b>COMPACT HYBRID DISTRIBUTION</b>	<b>123</b>
	<b>COMPONENT CARRIER</b>	<b>124</b>
	<b>Pluggable</b>	<b>125 - 129</b>
	<b>Angular Feed Through</b>	<b>131 - 134</b>
	<b>Angular Ground / Earth</b>	<b>135 - 138</b>
	<b>Panel Mount</b>	<b>139 - 142</b>

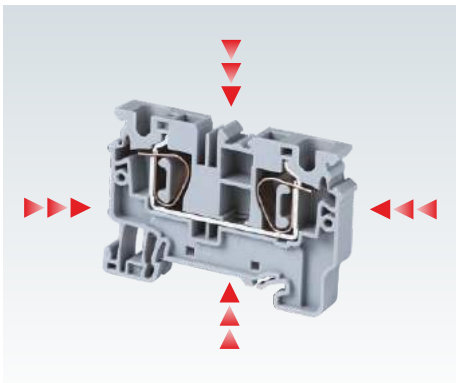

New CX series Terminal Blocks have an extremely compact design. These Terminal Blocks can be used in smaller control cabinets and enclosures.

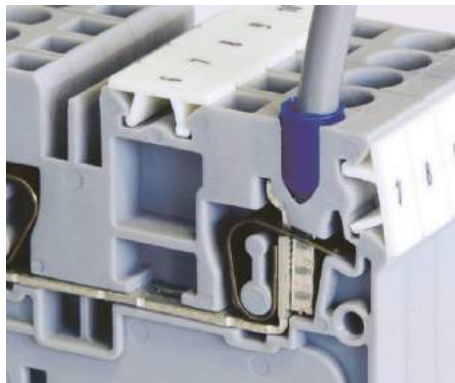

A unique design in the plastic housing of the Terminal Block facilitates ease of wire entry. Wires can be used with or without ferrules / lugs.

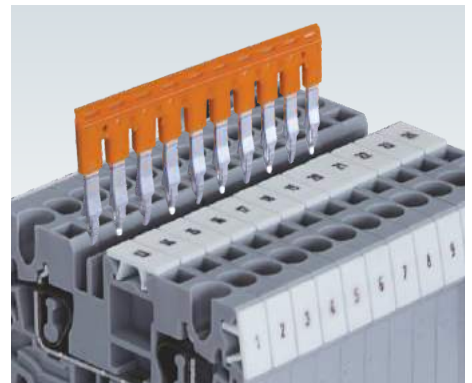


New push in technology jumpers for shorting Terminal Blocks are now available in 2,3,4 & 10 pole configuration.




The possibility of using 2 independent rows for bridging enables the creation of various circuit combinations. Shorting links can be marked with a felt tip pen on the recess provided on top, to clearly indicate shorted positions.




Specific Terminal Blocks in an assembly can be shorted by breaking intermediate contacts from the standard shorting link.

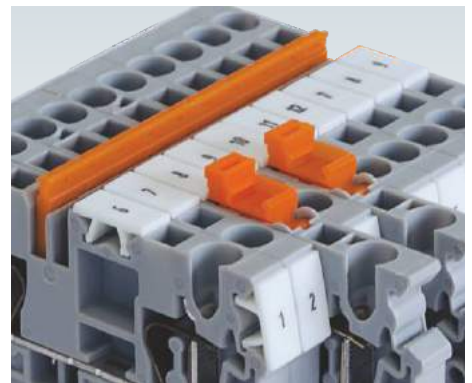


The jumper and marking tag position is aligned across different types of CX series Terminal Blocks. This facilitates shorting and marking adjacent terminals with different functionalities.

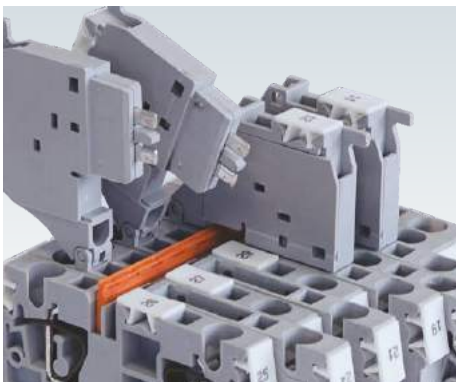


Feed Through Terminal Blocks can be simultaneously shorted in an alternating configuration with Fuse & Disconnecting Terminal Blocks using Push in shorting links.

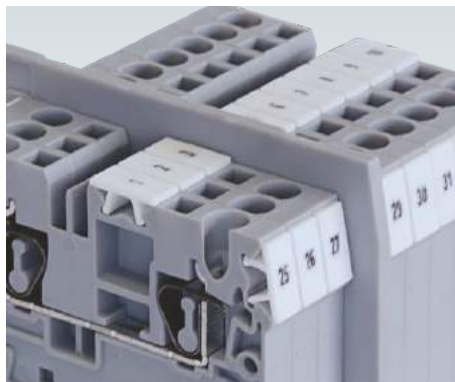


Partition Plates can be individually mounted on DIN rails between Terminal Blocks to provide electrical and visual separation.

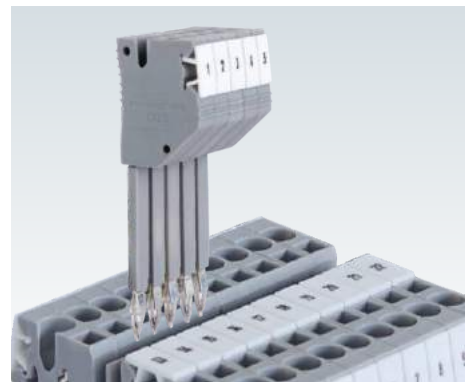


Specially designed Test Plugs are available for CX series Terminal Blocks for quick testing and measurement.

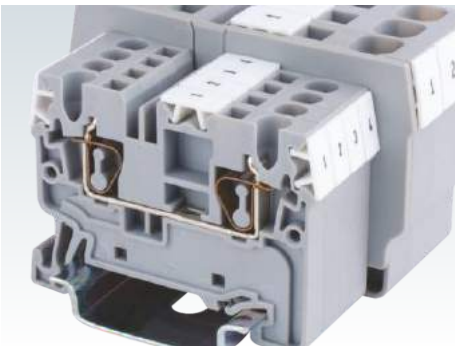


High quality stainless steel spring clamps provides a gas tight connection. A vibration proof, anti-loosening wire connection is achieved with this pre-stressed spring clamp system.

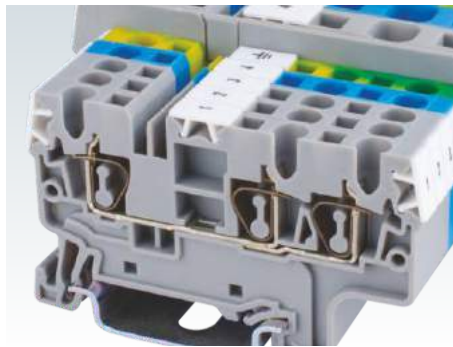


Multi connection Terminal Blocks are used for applications involving more than one same potential wires to be connected.

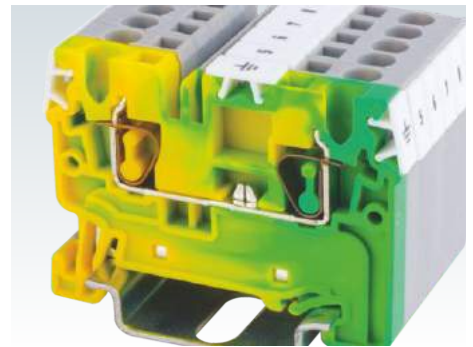


Ground Terminal Blocks have specially designed alloy feet which snap on to the DIN rail. They are green-yellow colour coded as per industry norms.

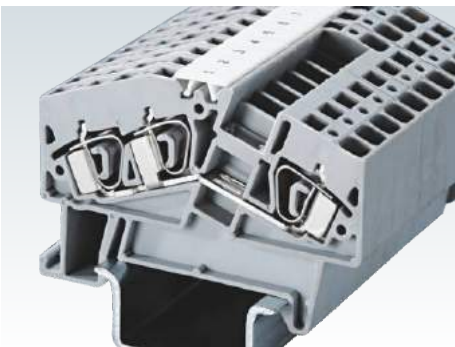


The AS series Terminal Blocks have an angled wire entry making it suitable for underfloor wiring systems. These Terminal Blocks are compact with the 2 wire, 3 wire & 4 wire terminals having the same profile.

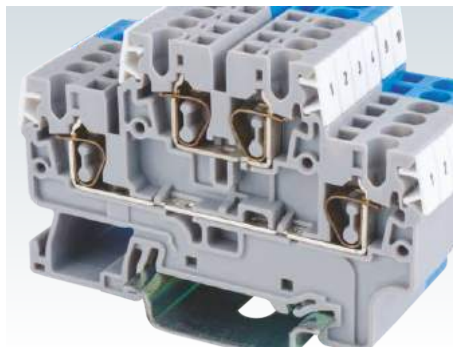

Double level Terminal Blocks enable high density wiring. Each level can be independently shorted to suit various applications.

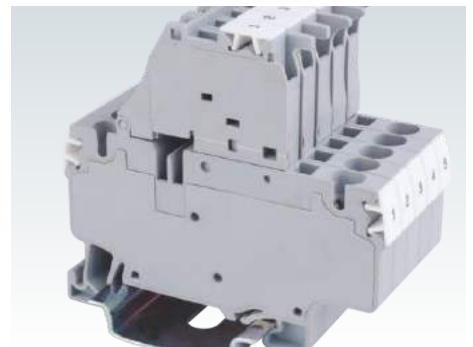

These Fuse Terminal Blocks can be used for  $\text{Ø } 5 \times 20$  and  $\text{Ø } 5 \times 25$  glass cartridge fuses. A spare cartridge fuse can be accommodated in the fuse carrier.

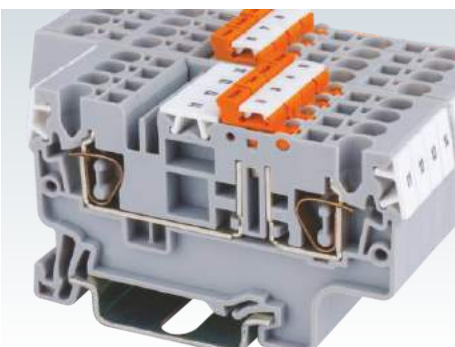

The spring clamp knife disconnect terminal system enables isolation of circuits. A standard test plug can be used with these Terminal Blocks.



These Terminal Blocks with electronic components are designed to meet various rectification and filtering application requirements.



The CSCP series Terminal Blocks are an ideal choice for equipment wire terminations. They can be easily mounted on the panel surface with the help of with fixing screws.


# FEED THROUGH TERMINAL BLOCKS

CX series Spring Clamp Terminal Blocks are the next generation, compact terminals. These series of Terminal Blocks have an improved 1000 V rating as per IEC guidelines. The new CX series terminals have a much wider range for wire terminations.

The wire is held directly against the copper current bar by pre stressed spring clamps.

Cross connection of these Terminal Blocks can be done using insulated push in jumpers available in 2,3,4 and 10 pole configurations.


Width (Thickness) x Length	5 x 50 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38 mm / 45.7 mm			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG	
Wire Stripping Length	10 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	1000 V	600 V	600 V	630 V
Current	24 A	20 A	20 A	21 A
Approval				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3			

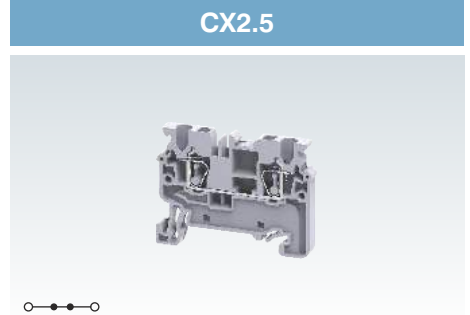

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CX2.5	100
	Blue	CX2.5BU	100
	Red	CX2.5R	100
	Yellow	CX2.5Y	100
	Black	CX2.5BK	100
	Green	CX2.5GN	100
	Orange	CX2.5O	100
	Ground / Earth	CXG2.5 (Refer Pg. 130 for Details)	100
End Plate	EPCX2.5	50	
Partition Plate	PPCX4	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Warning Label	WLX2.5	100	
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100	
Screw Driver	SCM0.5/3	Blade size: 0.5 x 3.0 mm	10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
 2 pole  3 pole  4 pole  5 pole  6 pole  7 pole  8 pole  10 pole	JX2.5/2	24 A	100	
	JX2.5/3	24 A	50	
	JX2.5/4	24 A	50	
	JX2.5/5	24 A	50	
	JX2.5/6	24 A	10	
	JX2.5/7	24 A	10	
	JX2.5/8	24 A	10	
	JX2.5/10	24 A	10	
	Step Down Shorting Link	JXS10/2.5	24 A	50
		JXS6/2.5	24 A	50
	JXS4/2.5	24 A	50	
Test Plug	TX2.5		50	

### CX4

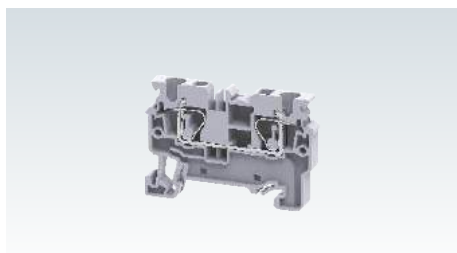

6 x 54.8 mm

38 mm / 45.5 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 18 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CX4	100
CX4BU	100
CX4R	100
CX4Y	100
CX4BK	100
CX4GN	100
CX4O	100
CXG4 (Refer Pg. 131 for Details)	100
EPCX4	50
PPCX4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	100
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS10/4	32 A	50
JXS6/4	32 A	50
JXS4/2.5	24 A	50

### CX6

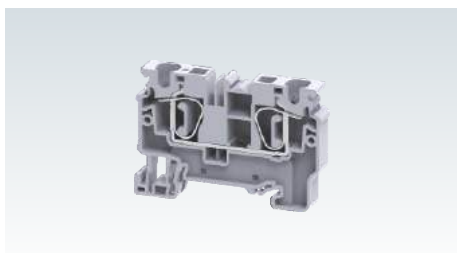

8 x 62.1 mm

43 mm / 50.5 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
41 A	50 A	50 A	36 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CX6	100
CX6BU	100
CX6R	100
CX6Y	100
CX6BK	100
CX6GN	100
CX6O	100
CXG6 (Refer Pg. 131 for Details)	100
EPCX6	50
PPCX10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX6	50
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX6/2	41 A	100
JX6/3	41 A	50
JX6/4	41 A	50
JX6/10	41 A	10
JXS10/6	41 A	50
JXS6/2.5	24 A	50
JXS6/4	32 A	50

### CX10

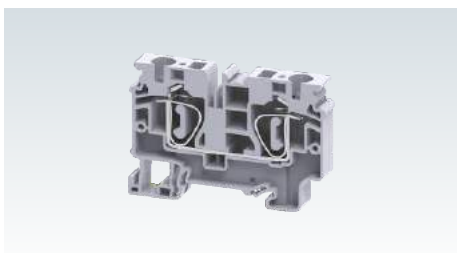

10 x 71.7 mm

49.5 mm / 57 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
1.5 - 4.0 mm <sup>2</sup>	

18 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
57 A	65 A	65 A	51 A



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CX10	50
CX10BU	50
CX10R	50
CX10Y	50
CX10BK	50
CX10GN	50
CX10O	50
CXG10 (Refer Pg. 132 for Details)	50
EPCX10	50
PPCX10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX10	50
CA509/K10WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX10/2	57 A	20
JXS10/2.5	24 A	50
JXS10/4	32 A	50
JXS10/6	41 A	50



# FEED THROUGH TERMINAL BLOCKS

In Spring Clamp Terminal Blocks the wire is held directly against the current bar by pre-stressed spring clamps.

The spring clamp is operated by using a screw driver to provide an access to the wire through an opening in the spring clamp. The inserted wire gets clamped on to the current bar when the screw driver is removed.

Cross Connection is done with Insulated Push-in / wire type shorting links.

Step Down shorting links are used for shorting spring clamp Terminal Blocks of different sizes. For more details refer page 235.

Width (Thickness) x Length	12 x 82 mm														
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	51.6 mm / 59.0 mm														
Connection Possibility as per	<table border="1"> <thead> <tr> <th>IEC</th> <th colspan="2">UL - CSA</th> </tr> </thead> <tbody> <tr> <td>1.5 - 16.0 mm<sup>2</sup></td> <td colspan="2">16 - 4 AWG</td> </tr> <tr> <td>1.5 - 16.0 mm<sup>2</sup></td> <td colspan="2">16 - 4 AWG</td> </tr> <tr> <td>1.5 - 10.0 mm<sup>2</sup></td> <td colspan="2">16 - 8 AWG</td> </tr> </tbody> </table>			IEC	UL - CSA		1.5 - 16.0 mm <sup>2</sup>	16 - 4 AWG		1.5 - 16.0 mm <sup>2</sup>	16 - 4 AWG		1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG	
IEC	UL - CSA														
1.5 - 16.0 mm <sup>2</sup>	16 - 4 AWG														
1.5 - 16.0 mm <sup>2</sup>	16 - 4 AWG														
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG														
With 1 Conductor per clamp	Stranded / Flexible Solid with Ferrule / Lug														
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug														
Wire Stripping Length	20 mm														
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158												
Voltage	800 V	600 V	600 V												
Current	76 A	85 A	85 A												
Approvals															
Insulation Material / Material Group	Polyamide 6,6 / 1														
Rated Impulse Voltage / Pollution Degree	8 KV / 3														



		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CSC16T	50
	Blue	CSC16TBU	50
	Red	CSC16TR	50
	Yellow	CSC16TY	50
	Black	CSC16TBK	50
	Green	CSC16TGN	50
	Ground / Earth	CSCG16T (Refer Pg. 132 for Details)	50
End Plate		EPCSC16T	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)		CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)		CA509/K12WHT	100
Screw Driver		SCM1/5.5 Blade size: 1.0 x 5.5 mm	10


Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 Pole	CA801/5	76 A	100

# MULTIPLE CONNECTION TERMINAL BLOCKS

CX series multi connect 3 wire & 4 wire spring clamp Terminal Blocks are used to eliminate reliability problems encountered when there is a need to connect multiple wires in a single Terminal Block.

CX2.5/4P is a double potential Terminal Block. It allows two different system voltages to be run through the same terminal block. One side of the Terminal Block can be shorted with standard insulated push in jumpers.


Width (Thickness) x Length	5 x 62.5 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38 mm / 45.7 mm			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG	
Wire Stripping Length	10 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	1000 V	600 V	600 V	630 V
Current	24 A	20 A	20 A	21 A
Approval				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3			

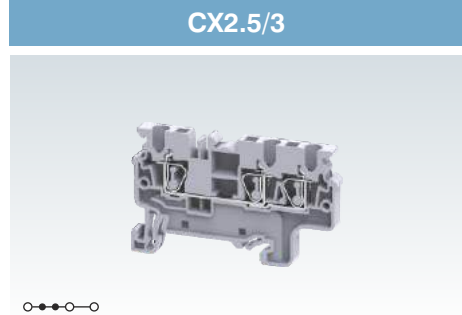



		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CX2.5/3	100
	Blue	CX2.5/3BU	100
	Red	CX2.5/3R	100
	Yellow	CX2.5/3Y	100
	Black	CX2.5/3BK	100
	Green	CX2.5/3GN	100
	Orange	CX2.5/3O	100
	Ground / Earth	CXG2.5/3 (Refer Pg. 132 for Details)	100
End Plate		EPCX2.5/3	50
Partition Plate		PPCX4/3	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA103 / CA104	50
Warning Label		WLX2.5	100
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT	100
Screw Driver		SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10
	16 pole			
	Step Down Shorting Link		JXS10/2.5	24 A
		JXS6/2.5	24 A	50
		JXS4/2.5	24 A	50
Test Plug		TX2.5		50

**CX2.5/4**

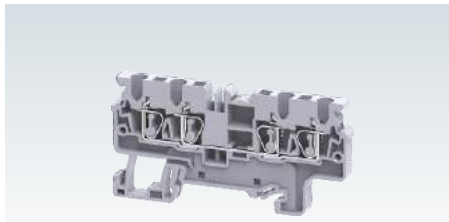

**CX2.5/4P**

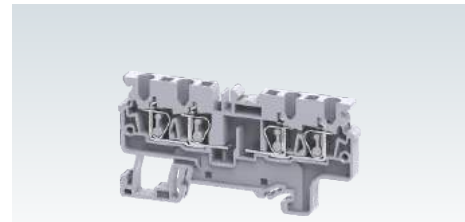

Width (Thickness) x Length		5 x 74.7 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		38 mm / 45.7 mm	
Connection Possibility as per		<b>IEC</b>	<b>UL - CSA</b>
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG
Wire Stripping Length		10 mm	
Ratings As Per		IEC60947-7-1	UL-1059 CSA22.2-158 IEC60079-7
Voltage		1000 V	600 V 600 V 630 V
Current		24 A	20 A 20 A 21 A
Approval			
Insulation Material / Material Group		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	

Width (Thickness) x Length		5 x 74.7 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		38 mm / 45.7 mm	
Connection Possibility as per		<b>IEC</b>	<b>UL - CSA</b>
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 0.5 mm <sup>2</sup>	24 - 20 AWG
Wire Stripping Length		10 mm	
Ratings As Per		IEC60947-7-1	UL-1059 CSA22.2-158
Voltage		1000 V	600 V 600 V
Current		24 A	20 A 20 A
Approval			
Insulation Material / Material Group		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CX2.5/4	100
	Blue	CX2.5/4BU	100
	Red	CX2.5/4R	100
	Yellow	CX2.5/4Y	100
	Black	CX2.5/4BK	100
	Green	CX2.5/4GN	100
	Orange	CX2.5/4O	100
	Ground / Earth	CXG2.5/4 (Refer Pg. 133 for Details)	100
End Plate	EPCX2.5/4	50	
Partition Plate	PPCX4/4	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Warning Label	WLX2.5	100	
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100	
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3.0 mm	10	

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CX2.5/4P	100
	Blue	CX2.5/4PBU	100
	Red	CX2.5/4PR	100
	Yellow	CX2.5/4PY	100
	Black	CX2.5/4PBK	100
	Green	CX2.5/4PGN	100
	Orange	CX2.5/4PO	100
	Ground / Earth	CXG2.5/4P (Refer Pg. 133 for Details)	100
End Plate	EPCX2.5/4P	50	
Partition Plate	PPCX4/4P	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Warning Label	WLX2.5P	100	
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHTP	100	
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3.0 mm	10	


	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CX2.5/4P	100
	Blue	CX2.5/4PBU	100
	Red	CX2.5/4PR	100
	Yellow	CX2.5/4PY	100
	Black	CX2.5/4PBK	100
	Green	CX2.5/4PGN	100
	Orange	CX2.5/4PO	100
	Ground / Earth	CXG2.5/4P (Refer Pg. 133 for Details)	100
End Plate	EPCX2.5/4P	50	
Partition Plate	PPCX4/4P	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Warning Label	WLX2.5P	100	
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHTP	100	
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3.0 mm	10	

	Type / Cat. No.	Imax	Standard Pack	
Shorting Links	2 pole	JX2.5/2	24 A 100	
	3 pole	JX2.5/3	24 A 50	
	4 pole	JX2.5/4	24 A 50	
	5 pole	JX2.5/5	24 A 50	
	6 pole	JX2.5/6	24 A 10	
	7 pole	JX2.5/7	24 A 10	
	8 pole	JX2.5/8	24 A 10	
	10 pole	JX2.5/10	24 A 10	
	Step Down Shorting Link	JXS10/2.5	24 A	50
		JXS6/2.5	24 A	50
JXS4/2.5		24 A	50	
Test Plug	TX2.5		50	

	Type / Cat. No.	Imax	Standard Pack	
Shorting Links	2 pole	JX2.5/2	24 A 100	
	3 pole	JX2.5/3	24 A 50	
	4 pole	JX2.5/4	24 A 50	
	5 pole	JX2.5/5	24 A 50	
	6 pole	JX2.5/6	24 A 10	
	7 pole	JX2.5/7	24 A 10	
	8 pole	JX2.5/8	24 A 10	
	10 pole	JX2.5/10	24 A 10	
	Step Down Shorting Link	JXS10/2.5	24 A	50
		JXS6/2.5	24 A	50
JXS4/2.5		24 A	50	
Test Plug	TX2.5		50	

	Type / Cat. No.	Imax	Standard Pack	
Shorting Links	2 pole	JX2.5/2	24 A 100	
	3 pole	JX2.5/3	24 A 50	
	4 pole	JX2.5/4	24 A 50	
	5 pole	JX2.5/5	24 A 50	
	6 pole	JX2.5/6	24 A 10	
	7 pole	JX2.5/7	24 A 10	
	8 pole	JX2.5/8	24 A 10	
	10 pole	JX2.5/10	24 A 10	
	Step Down Shorting Link	JXS10/2.5	24 A	50
		JXS6/2.5	24 A	50
JXS4/2.5		24 A	50	
Test Plug	TX2.5		50	

**CX4/3**



6 x 70.5 mm  
38 mm / 45.5 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG

0.2 - 1.0 mm<sup>2</sup> 24 - 18 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CX4/3	50
CX4/3BU	50
CX4/3R	50
CX4/3Y	50
CX4/3BK	50
CX4/3GN	50
CX4/3O	50
CXG4/3 (Refer Pg. 133 for Details)	50
EPCX4/3	50
PPCX4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	50
CA509/K5WHT	100
SCM0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS10/4	32 A	50
JXS6/4	32 A	50
JXS4/2.5	24 A	50

**CX4/4**



6 x 86.2 mm  
38 mm / 45.5 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG

0.2 - 1.0 mm<sup>2</sup> 24 - 18 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
32 A	30 A	30 A	28 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CX4/4	50
CX4/4BU	50
CX4/4R	50
CX4/4Y	50
CX4/4BK	50
CX4/4GN	50
CX4/4O	50
CXG4/4 (Refer Pg. 134 for Details)	50
EPCX4/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	50
CA509/K6WHT	100
SCM0.6/3.5 Blade size: 0.6 x 3.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS10/4	32 A	50
JXS6/4	32 A	50
JXS4/2.5	24 A	50

**CX6/3**




8 x 82.2 mm  
43 mm / 50.5 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

14 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
41 A	50 A	50 A	36 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CX6/3	50
CX6/3BU	50
CX6/3R	50
CX6/3Y	50
CX6/3BK	50
CX6/3GN	50
CX6/3O	50
CXG6/3 (Refer Pg. 134 for Details)	50
EPCX6/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX6	50
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10


Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX6/2	41 A	100
JX6/3	41 A	50
JX6/4	41 A	50
JX6/10	41 A	10
JXS10/6	41 A	50
JXS6/2.5	24 A	50
JXS6/4	32 A	50

**CX10/3**

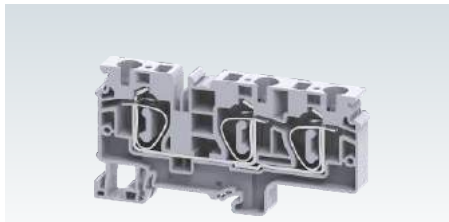

Width (Thickness) x Length	10 x 97.6 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	49.3 mm / 56.8 mm		
Connection Possibility as per	IEC	UL - CSA	
	With 1 Conductor per clamp	Stranded / Flexible	24 - 6 AWG
		Solid	
		with Ferrule / Lug	24 - 6 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	1.5 - 4.0 mm <sup>2</sup>	
Wire Stripping Length	18 mm		
Ratings As Per	IEC60947-7-1	UL-1059	IEC60079-7
Voltage	1000 V	600 V	630 V
	Current	57 A	65 A
Approval			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

**CSC16/3T**

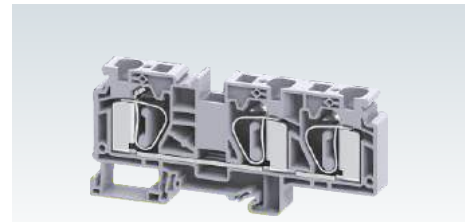


Width (Thickness) x Length	12 x 120 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	51.6 mm / 59.0 mm		
Connection Possibility as per	IEC	UL - CSA	
	With 1 Conductor per clamp	1.5 - 16.0 mm <sup>2</sup>	16 - 4 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG
Wire Stripping Length	20 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	800 V	600 V	600 V
	Current	76 A	85 A
Approval			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

Type / Cat. No.	Standard Pack	
Terminal Block		
Grey	CX10/3	50
Blue	CX10/3BU	50
Red	CX10/3R	50
Yellow	CX10/3Y	50
Black	CX10/3BK	50
Green	CX10/3GN	50
Orange	CX10/3O	50
Ground / Earth	CXG10/3 (Refer Pg. 134 for Details)	50

Type / Cat. No.	Standard Pack	
Terminal Block		
Grey	CSC16/3T	50
Blue	CSC16/3TBU	50
Red		50
Yellow		50
Black		50
Green		50
Orange		50
Ground / Earth	CSCG16/3T	50

**CSCG16/3T**

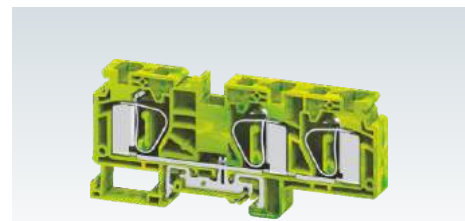

Type / Cat. No.	Standard Pack			
Terminal Block				
Ground / Earth				
End Plate	EPCX10/3	20		
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m		
	CA701-15-1M / CA701-15-1M-S	25 m		
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50		
Warning Label	WLX10	50		
Marking Tags (Refer Pg. 224 for details)	CA509/K10WHT	100		
Screw Driver	SCM0.8/4 Blade size: 0.8 x 4 mm	10		
Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
		JX10/2	57 A	20
		JXS10/2.5	24 A	50
		JXS10/4	32 A	50
	JXS10/6	41 A	50	
Step Down Shorting Link				

Type / Cat. No.	Standard Pack			
Terminal Block				
Ground / Earth				
End Plate	EPCSC16/3T	50		
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m		
	CA701-15-1M / CA701-15-1M-S	25 m		
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50		
Warning Label				
Marking Tags (Refer Pg. 224 for details)	CA509/K12WHT	100		
Screw Driver	SCM1/5.5 Blade size: 1.0 x 5.5 mm	10		
Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
		CA801/5	76 A	100
Step Down Shorting Link				

# GROUND / EARTH TERMINAL BLOCKS


CXG series are compact spring clamp earthing Terminal Blocks with specially designed alloy feet which help in achieving very low contact resistance and vibration proof grounding with the DIN rails. They are Green-Yellow colour coded as per industry standards.

Cross connection of these Terminal Blocks can be done using insulated push in links.


Multi connect 3 wire & 4 wire terminals eliminate reliability problems encountered when there is a need to connect multiple wires in a single Terminal Block.

Width (Thickness) x Length		5 x 50 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		38 mm / 45.7 mm		
Connection Possibility as per		IEC		UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
	Solid with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
Wire Stripping Length		10 mm		
Approval				
Insulation Material / Material Group		Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree		8 KV / 3		
Terminal Block		Type / Cat. No.	Standard Pack	
End Plate		CXG2.5	100	
Partition Plate		EPCX2.5	50	
Mounting Rail (Refer Pg. 219 for details)		PPCX4	50	
End Clamp (Refer Pg. 220 for details)		CA701-1M / CA701-1M-S	50 m	
		CA701-15-1M / CA701-15-1M-S	25 m	
Warning Label		CA103 / CA104	50	
Marking Tags (Refer Pg. 224 for details)		WLX2.5	100	
Screw Driver		CA509/K5WHT	100	
		SCM0.5/3 Blade size: 0.5 x 3.0 mm	10	
Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10
	16 pole	JX2.5/10	24 A	10
Step Down Shorting Link		JXS10/2.5	24 A	50
		JXS6/2.5	24 A	50
		JXS4/2.5	24 A	50
Test Plug		TX2.5		50


## CXG2.5



**CXG4**



**CXG6**



Width (Thickness) x Length	6 x 54.8 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38 mm / 45.5 mm	
Connection Possibility as per	IEC	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid	0.2 - 6.0 mm <sup>2</sup>
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Approval		
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

	UL - CSA
	24 - 10 AWG
	24 - 10 AWG
	24 - 18 AWG

	UL - CSA
	24 - 8 AWG
	24 - 8 AWG
	24 - 16 AWG

Terminal Block	CXG4	100
End Plate	EPCX4	50
Partition Plate	PPCX4	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Warning Label	WLX4	100
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver	SCM0,5/3 Blade size: 0.5 x 3.0 mm	10

	Standard Pack
	100
	50
	50
	50 m
	25 m
	50
	100
	100
	10


	Standard Pack
	100
	50
	20
	50 m
	25 m
	50
	50
	100
	10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	32 A	100
	3 pole	32 A	50
	4 pole	32 A	50
	5 pole		
	6 pole		
	7 pole		
	8 pole	32 A	10
	10 pole	32 A	10
Step Down Shorting Link	JXS10/4	32 A	50
	JXS6/4	32 A	50
	JXS4/2.5	24 A	50
Test Plug			

	I <sub>max</sub>	Standard Pack
	32 A	100
	32 A	50
	32 A	50
	32 A	10
	32 A	10
	32 A	50
	32 A	50
	24 A	50

	I <sub>max</sub>	Standard Pack
	41 A	100
	41 A	50
	41 A	50
	41 A	10
	41 A	50
	24 A	50
	32 A	50

**CXG10**



10 x 71.7 mm  
49.5 mm / 57 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
1.5 - 2.5 mm <sup>2</sup>	

18 mm



Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CXG10	50
EPCX10	50
PPCX10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX10	50
CA509/K10WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX10/2	57 A	20
JXS10/2.5	24 A	50
JXS10/4	32 A	50
JXS10/6	41 A	50

**CSCG16T**



12 x 82 mm  
51.6 mm / 59.0 mm

IEC	UL - CSA
1.5 - 16.0 mm <sup>2</sup>	16 - 4 AWG
1.5 - 16.0 mm <sup>2</sup>	16 - 4 AWG
1.5 - 10.0 mm <sup>2</sup>	16 - 8 AWG

20 mm





Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CSCG16T	50
EPCSC16T	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K12WHT	100
SCM1.0/5.5 Blade size: 1.0 x 5.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack

**CXG2.5/3**



5 x 62.5 mm  
38 mm / 45.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG

10 mm




Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CXG2.5/3	100
EPCX2.5/3	50
PPCX4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10


Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
JXS10/2.5	24 A	50
JXS6/2.5	24 A	50
JXS4/2.5	24 A	50
TX2.5		50



**CXG2.5/4**

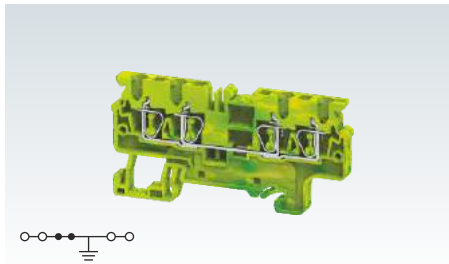

**CXG4/3**

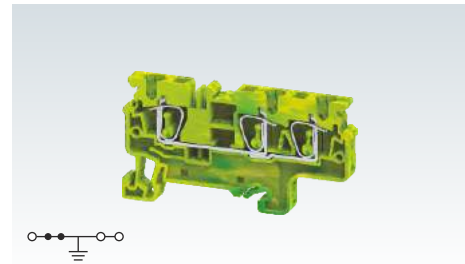

Width (Thickness) x Length	5 x 74.7 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38 mm / 45.5 mm	
Connection Possibility as per		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>
	Solid	0.2 - 4.0 mm <sup>2</sup>
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	

		<b>IEC</b>	<b>UL - CSA</b>
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG
Wire Stripping Length	10 mm		

		<b>IEC</b>	<b>UL - CSA</b>
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
	Solid	0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>	24 - 18 AWG
Wire Stripping Length	10 mm		

Approval	
Insulation Material / Material Group	Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree	8 KV / 3

Approval	
Insulation Material / Material Group	Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree	8 KV / 3

Approval	
Insulation Material / Material Group	Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree	8 KV / 3

	Type / Cat. No.	Standard Pack
Terminal Block	CXG2.5/4	100
End Plate	EPCX2.5/4	50
Partition Plate	PPCX4/4	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Warning Label	WLX2.5	100
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

	Type / Cat. No.	Standard Pack
Terminal Block	CXG4/3	50
End Plate	EPCX4/3	50
Partition Plate	PPCX4/3	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Warning Label	WLX4	100
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3.0 mm	10


	Type / Cat. No.	Standard Pack
Terminal Block	CXG4/3	50
End Plate	EPCX4/3	50
Partition Plate	PPCX4/3	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Warning Label	WLX4	100
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX2.5/2	24 A	
	3 pole	JX2.5/3	24 A	
	4 pole	JX2.5/4	24 A	
	5 pole	JX2.5/5	24 A	
	6 pole	JX2.5/6	24 A	
	7 pole	JX2.5/7	24 A	
	8 pole	JX2.5/8	24 A	
	10 pole	JX2.5/10	24 A	
	Step Down Shorting Link	JXS10/2.5	24 A	50
		JXS6/2.5	24 A	50
	JXS4/2.5	24 A	50	
Test Plug	TX2.5		50	

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX4/2	32 A	
	3 pole	JX4/3	32 A	
	4 pole	JX4/4	32 A	
	8 pole	JX4/8	32 A	
	10 pole	JX4/10	32 A	
	Step Down Shorting Link	JXS10/4	32 A	50
		JXS6/4	32 A	50
		JXS4/2.5	24 A	50
	Test Plug	TX2.5		50

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX4/2	32 A	
	3 pole	JX4/3	32 A	
	4 pole	JX4/4	32 A	
	8 pole	JX4/8	32 A	
	10 pole	JX4/10	32 A	
	Step Down Shorting Link	JXS10/4	32 A	50
		JXS6/4	32 A	50
		JXS4/2.5	24 A	50
	Test Plug	TX2.5		50

**CXG4/4**



6 x 86.2 mm  
38 mm / 45.5 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.0 mm <sup>2</sup>	24 - 18 AWG

10 mm





Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CXG4/4	50
EPCX4/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	100
CA509/K6WHT	100
SCM0,5/3 Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS10/4	32 A	50
JXS6/4	32 A	50
JXS4/2.5	24 A	50

**CXG6/3**



8 x 82.2 mm  
43 mm / 50.5 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

14 mm





Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CXG6/3	50
EPCX6/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX6	100
CA509/K8WHT	100
SCM0,8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	Imax	Standard Pack
JX6/2	41 A	100
JX6/3	41 A	50
JX6/4	41 A	50
JX6/10	41 A	10
JXS10/6	41 A	50
JXS6/2.5	24 A	50
JXS6/4	32 A	50

**CXG10/3**



10 x 97 mm  
49.3 mm / 56.8 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
0.2 - 10.0 mm <sup>2</sup>	24 - 6 AWG
1.5 - 4.0 mm <sup>2</sup>	

18 mm



Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CXG10/3	50
EPCX10/3	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX10	100
CA509/K10WHT	100
SCM0,8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	Imax	Standard Pack
JX10/2	57 A	20
JXS10/2.5	24 A	50
JXS10/4	32 A	50
JXS10/6	41 A	50


# MULTIPLE LEVEL TERMINAL BLOCKS

CXDL2.5 is a compact double level Spring Clamp Terminal Block. This Terminal Block is used in high density wiring applications. Interconnections / shorting is possible at both levels. This Terminal Block is suitable for 1000 V rating.


CXDL2.5(I.S) is double level internally shorted Terminal Block. This is an ideal choice for distribution application.







CXDLG2.5 is double level spring clamp Terminal Block with an additional grounding point for terminating grounding cables on the lower level of the terminal block. The earth connection is made by snapping the terminal on the Din rail. This separate connection point is appropriately identified by the green-yellow imprint on its top.

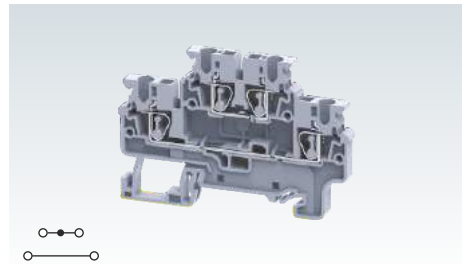
CXDLG2.5(I.S) is double level ground Terminal Block with 4 connection points for grounding wires. It is available in a standard green-yellow colour to indicate the grounding connection.

Width (Thickness) x Length		5 x 72.7 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		49.5 mm / 57 mm			
Connection Possibility as per		IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG		
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG		
with Ferrule / Lug		0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG		
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG		
Wire Stripping Length		10 mm			
Ratings As Per		IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage		1000 V	600 V	600 V	630 V
Current		24 A	20 A	20 A	21 A
Approval					
Insulation Material / Material Group		Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree		8 KV / 3			


## CXDL2.5



		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CXDL2.5	50
	Blue	CXDL2.5BU	50
	Red	CXDL2.5R	50
	Yellow	CXDL2.5Y	50
	Black	CXDL2.5BK	50
	Green	CXDL2.5GN	50
	Orange	CXDL2.5O	50
	Ground / Earth	CXDLG2.5(I.S.)	50
End Plate		EPCXDL2.5	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA103 / CA104	50
Warning Label		WLX2.5	100
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT	100
Screw Driver		SCM0.5/3 Blade size: 0.5 x 3.0 mm	10
Tree Marker		TM5	50

Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX2.5/2	24 A	100	
	3 pole	JX2.5/3	24 A	50	
	4 pole	JX2.5/4	24 A	50	
	5 pole	JX2.5/5	24 A	50	
	6 pole	JX2.5/6	24 A	10	
	7 pole	JX2.5/7	24 A	10	
	8 pole	JX2.5/8	24 A	10	
	10 pole	JX2.5/10	24 A	10	
	Test Plug		TX2.5		50

**CXDL2.5(I.S)**



5 x 72.7 mm  
49.5 mm / 57 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.2 - 1.0 mm<sup>2</sup> 24 - 20 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7


1000 V	600 V	600 V	630 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1

8 KV / 3

**CXDLG2.5**



5 x 72.7 mm  
49.5 mm / 57 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.2 - 1.0 mm<sup>2</sup> 24 - 20 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7


1000 V	600 V	600 V	630 V
24 A	20 A		21 A



Polyamide 6,6 / 1

8 KV / 3

**CXDLG2.5(I.S)**



5 x 72.7 mm  
49.5 mm / 57 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.2 - 1.0 mm<sup>2</sup> 24 - 20 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CXDL2.5(I.S)	50
EPCXDL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10
TM5	50

Type / Cat. No.	Standard Pack
CXDLG2.5	50
EPCXDL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10
TM5	50

Type / Cat. No.	Standard Pack
CXDLG2.5(I.S)	50
EPCXDL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10
TM5	50

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

# MULTIPLE LEVEL TERMINAL BLOCKS

ADLG2.5 & CP4LG2.5 Terminal Block has an additional grounding point for terminating earthing / grounding cables. The earth connection is made by snapping the terminal on the DIN rail. This separate connection point is appropriately identified by the green - yellow imprint on its top.

ATL series & CP3L2.5 Triple Terminal Blocks are an ideal choice for control systems where sensor and actuator applications are involved. The simplified 3-level connections tremendously increase wiring density in the circuit.

CP3L2.5(I.S) is a 3 level internally shorted version. CP3LG2.5 is 3 level with grounding feet on bottom level. CP3LG2.5(I.S) is ground Terminal Block.

Width (Thickness) x Length	5 x 83.7 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	64.8 mm / 72.3 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
	Solid with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	10 mm		
Ratings As Per	IEC60947-2	UL-1059	
Voltage	500 V	600 V	
Current	24 A	20 A	
Approvals			
Insulation Material / Comparative Tracking Index	Polyamide 66 / 1		
Rated Impulse Voltage / Pollution Degree	6 KV / 3		



Terminal Block	
End Plate	
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Marking Tags (Refer Pg. 224 for details)	
Screw Driver	

Type / Cat. No.	Standard Pack
ADLG2.5	50
EPADLG2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	24 A	100
	3 pole	24 A	100
	4 pole	24 A	100
	10 pole	24 A	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/A2	24 A	100
CA801/A3	24 A	100
CA801/A4	24 A	100
CA801/A10	24 A	10

### ATL2.5



5 x 100 mm

75 mm / 82.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

0.2 - 1.5 mm<sup>2</sup> 22 - 14 AWG

10 mm

IEC60947-7-1 UL-1059

500 V	600 V		
24 A	20 A		



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
ATL2.5	50
EPATL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/A2	24 A	100
CA801/A3	24 A	100
CA801/A4	24 A	100
CA801/A10	24 A	10

### ATL2.5H



5 x 76.1 mm

75 mm / 82.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

0.2 - 1.5 mm<sup>2</sup> 22 - 14 AWG

10 mm

IEC60947-7-1

500 V			
24 A			



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
ATL2.5H	25
EPATL2.5H	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/A2	24 A	100
CA801/A3	24 A	100
CA801/A4	24 A	100
CA801/A10	24 A	10

### ATLG2.5



5 x 100 mm

75 mm / 82.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

0.2 - 1.5 mm<sup>2</sup> 22 - 14 AWG

10 mm

IEC60947-7-2 UL-1059

500 V	600 V		
24 A	20 A		



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
ATLG2.5	50
EPATLG2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack

# TERMINAL BLOCKS WITH ELECTRONIC COMPONENTS

These are electronic series spring clamp double level Terminal Blocks with built in diodes and LED.

The built in diode acts as a free wheeling diode which is connected across the inductive load such as relay coils, solenoid valves, contractor coils to eliminate or suppress sudden voltage spike which appears across the load when its supply voltage is removed.

CXDL2.5(E)LD1 Terminal Block has a built in LED circuit for online indication.



CX2.5/4(E)D1 is specially designed 4 wire spring clamp Terminal Block with a built in diode. This Terminal has a built in 1N4007 diode for reverse polarity protection and also allows uni directional flow of current.

Width (Thickness) x Length	5 x 72.7 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	49.5 mm / 57 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>	24 - 18 AWG
Wire Stripping Length	10 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	1000 V	600 V	600 V
Current	1 A	1 A	
Approval			
Insulation Material / Comparative Tracking Index	Polyamide 66 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		



	Type / Cat. No.	Standard Pack
End Plate	EPCXDL2.5	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Warning Label	WLX2.5	100
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3.0 mm	10
Tree Marker	TM5	50

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10
	Test Plug	TX2.5		50



Part No.	Application	Std. Pack
CXDL2.5(E)D1	Arc suppression circuit for contactors & solenoid valves - D.C	50





Part No.	Application	Std. Pack
CXDL2.5(E)D2	Arc suppression circuit for contactors & solenoid valves - D.C	50





Part No.	Application	Std. Pack
CXDL2.5(E)D3	Diode circuit for reverse polarity protection	50





Part No.	Application	Std. Pack
CXDL2.5(E)DD1	Diode circuit for lamp testing	50





Part No.	Application	Std. Pack
CXDL2.5(E)DD2	Diode circuit for lamp testing	50





Part No.	Application	Std. Pack
CXDL2.5(E)DD3	Diode circuit for lamp testing	50





Part No.	Application	Std. Pack
CXDL2.5(E)DD4	Diode circuit for lamp testing	50






Part No.	Application	Std. Pack
CXDL2.5(E)LD1	DC Voltage indicator with LED	50



Part No.	Application	Std. Pack
CXDL2.5(E)TS1	Temperature sensor for measuring temperature	50



Part No.	Application	Std. Pack
CX2.5/4(E)D1	Arc suppression circuit for contactors & solenoid valves - D.C	100
CX2.5/4(E)D2		100




Width (Thickness) x Length	5 x 74.7 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38 mm / 45.7 mm	
End Plate	EPCX2.5/4	20
Partition Plate	PPCX4/4	20





**CXVF / CXVF2.5**



12 X 75 mm  
43 mm / 50.5 mm

Wire Range	CXVF	CXVF2.5
I/P Wire IEC	0.2 - 6.0 mm <sup>2</sup>	0.2 - 6.0 mm <sup>2</sup>
O/P Wire IEC	0.2 - 6.0 mm <sup>2</sup>	0.2 - 2.5 mm <sup>2</sup>
I/P Wire UL	24 - 8 AWG	24 - 8 AWG
O/P Wire UL	24 - 8 AWG	24 - 12 AWG

10 mm

IEC60947-7-3 UL-1059 CSA22.2-158

800 V	600 V	600 V
10A	10A	10A



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No. (with 1 in 1 out Connection)	Type / Cat. No. (with 1 in 2 out Connection)	Std. Pack
---	---	-----------



CXVFA	CXVF2.5A	50
CXVFAL12V	CXVF2.5AL12V	50
CXVFAL24V	CXVF2.5AL24V	50
CXVFAL48V	CXVF2.5AL48V	50
CXVFAL60V	CXVF2.5AL60V	50
CXVFAL240V	CXVF2.5AL240V	50
CXVFB	CXVF2.5B	50
CXVFBL12V	CXVF2.5BL12V	50
CXVFBL24V	CXVF2.5BL24V	50
CXVFBL48V	CXVF2.5BL48V	50
CXVFBL60V	CXVF2.5BL60V	50
CXVFBL240V	CXVF2.5BL240V	50
CXVFC	CXVF2.5C	50
CXVFCL12V	CXVF2.5CL12V	50
CXVFCL24V	CXVF2.5CL24V	50
CXVFCL48V	CXVF2.5CL48V	50
CXVFCL60V	CXVF2.5CL60V	50
CXVFCL240V	CXVF2.5CL240V	50

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50

CA509/K12WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	Imax	Standard Pack
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

**CXF4/3**



6 x 86.2 mm  
69.1 mm / 76.6 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG

10 mm

IEC60947-7-3 UL-1059

1000 V	600 V
10A	10A



Polyamide 6,6 / 1

4 KV / 3


Type / Cat. No.	Standard Pack
-----------------	---------------

CXF4/3	50
CXF4/3L6-60V	50
CXF4/3L110-240V	50

EPCX4/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	100
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

**CXAF4/3**



6 x 86.2 mm  
43.2 mm / 50.7 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG

10 mm

IEC60947-7-3 UL-1059 CSA22.2-158 IEC60079-7

1000 V	600 V	600 V	630 V
10A	10A	10A	6.3 A



Polyamide 6,6 / 1

4 KV / 3

Type / Cat. No.	Standard Pack
-----------------	---------------

CXAF4/3	50
CXAF4/3L6-60V	50
CXAF4/3L110-240V	50

EPCX4/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	100
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

# DISCONNECT & TEST TERMINAL BLOCKS

CXK series terminals are compact disconnect spring clamp Terminal Blocks.


In these Terminal Blocks disconnection is achieved by opening the insulated knife (blade) contact in the middle of the terminal.

Separate testing points are provided on top for inserting standard Ø2.3 mm test probes.

Alternate and continuous bridging can be done with standard insulated push in jumpers.

Multi connect 4 wire terminals eliminate reliability problems encountered when there is a need to connect multiple wires in a single Terminal Block.

## CXK2.5

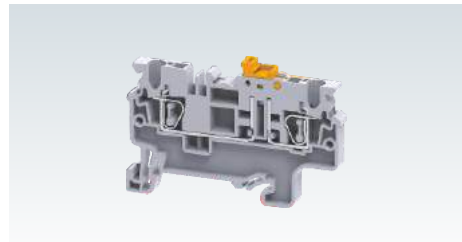

Width (Thickness) x Length	5 x 62.2 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	42.3 mm / 49.8 mm			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 0.5 mm <sup>2</sup>	24 - 20 AWG	
Wire Stripping Length	10 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	1000 V	600 V	600 V	630 V
Current	20 A	16 A	16 A	17 A
Approval				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	6 KV / 3			

	Type / Cat. No.	Standard Pack		
Terminal Block	Grey	CXK2.5	100	
	Blue	CXK2.5BU	100	
End Plate	EPCX2.5/3	50		
Partition Plate	PPCX4/3	50		
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m		
	CA701-15-1M / CA701-15-1M-S	25 m		
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50		
Warning Label	WLX2.5	100		
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100		
Disconnecting Marker	CA509/K4WHT	100		
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10		
Shorting Links				
	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10
	Test Plug	TX2.5	50	

**CXK2.5/4**



5 x 74.7 mm

42.3 mm / 49.8 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 0.5 mm <sup>2</sup>	24 - 20 AWG

10 mm

IEC60947-7-1 UL-1059 IEC60079-7


1000 V	600 V	630 V
20 A	16 A	17 A



Polyamide 6,6 / 1

6 KV / 3

**CXK4**



6 x 65.7 mm

42.6 mm / 50.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.0 mm <sup>2</sup>	24 - 18 AWG

10 mm

IEC60947-7-1 UL-1059

1000 V	300 V
22 A	22 A



Polyamide 6,6 / 1

8 KV / 3

**CXK4/3**



6 x 86.2 mm

42.6 mm / 50.1 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.0 mm <sup>2</sup>	24 - 18 AWG

10 mm

IEC60947-7-1 UL-1059

1000 V	600 V
28 A	30 A



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CXK2.5/4	50
CXK2.5/4BU	50
EPCX2.5/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
CA509/K4WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Imax	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

Type / Cat. No.	Standard Pack
CXK4	100
CXK4BU	100
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	50
CA509/K6WHT	100
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

Type / Cat. No.	Standard Pack
CXK4/3	50
CXK4/3BU	50
EPCX4/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX4	50
CA509/K6WHT	100
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10


  

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

# MICRO SPRING CLAMP TERMINAL BLOCKS






The CMS2.5 is mini feed through spring clamp Terminal Block designed for Din 15 rail. It is an ideal choice for constrained spaces and small junction boxes.

These Terminal Blocks are an excellent solution for extremely compact wiring applications. The Terminal Blocks are "Modular" and can be mounted on Din Rail CA601. Insulated shorting links can be used for Cross connection.


Width (Thickness) x Length	5 x 37 mm																					
Height with DIN 15 mm Rail	35 mm																					
Connection Possibility as per	<table border="1"> <thead> <tr> <th>IEC</th> <th colspan="2">UL - CSA</th> </tr> </thead> <tbody> <tr> <td>With 1 Conductor per clamp</td> <td>Stranded / Flexible</td> <td>0.2 - 2.5 mm<sup>2</sup></td> <td>24 - 12 AWG</td> </tr> <tr> <td></td> <td>Solid</td> <td>0.2 - 4.0 mm<sup>2</sup></td> <td>24 - 10 AWG</td> </tr> <tr> <td></td> <td>with Ferrule / Lug</td> <td>0.2 - 2.5 mm<sup>2</sup></td> <td>24 - 12 AWG</td> </tr> <tr> <td>With 2 same size Conductors per clamp</td> <td>with TWIN Ferrule / Lug</td> <td>0.2 - 1.5 mm<sup>2</sup></td> <td>24 - 16 AWG</td> </tr> </tbody> </table>			IEC	UL - CSA		With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG		Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG		with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
IEC	UL - CSA																					
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG																			
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG																			
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG																			
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG																			
Wire Stripping Length	10 mm																					
Ratings As Per	IEC60947-7-1 UL-1059																					
Voltage	1000 V	600 V																				
Current	24 A	20 A																				
Approval																						
Insulation Material / Comparative Tracking Index	Polyamide 66 / 1																					
Rated Impulse Voltage / Pollution Degree	8 KV / 3																					



	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Terminal Block	Grey	CXM2.5	100
	Blue	CXM2.5BU	100
	Red	CXM2.5R	100
	Yellow	CXM2.5Y	100
	Black	CXM2.5BK	100
	Green	CXM2.5GN	100

End Plate		EPCXM2.5	50
Mounting Rail (Refer Pg. 219 for details)		CA601	50 m
End Clamp (Refer Pg. 220 for details)		CA602	50
Actuator for actuating the spring clamp		SCA2.5	1
Marking Tag (Refer Pg. 224 for details)		MS5WHT	100
Screw Driver			

	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
Shorting Links	2 pole	JX2.5/2	24 A 100	
	3 pole	JX2.5/3	24 A 50	
	4 pole	JX2.5/4	24 A 50	
	5 pole	JX2.5/5	24 A 50	
	6 pole	JX2.5/6	24 A 10	
	7 pole	JX2.5/7	24 A 10	
	8 pole	JX2.5/8	24 A 10	
	10 pole	JX2.5/10	24 A 10	
	Test Plug	TX2.5		50



### CXMG2.5



For DIN 15 Rail Mounting

5 x 37 mm

35 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

10 mm




Polyamide 66 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CXMG2.5	100
EPCXM2.5	50
CA601	50 m
CA602	50
SCA2.5	1
MS5WHT	100

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

### CMS2.5



For DIN 15 Rail Mounting

5 x 31mm

30.15 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 0.5 mm <sup>2</sup>	24 - 20 AWG

9 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

800 V	300 V	300 V	400 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CMS2.5	100
CMS2.5BU	100
CMS2.5R	100
CMS2.5Y	100
CMS2.5BK	100
CMS2.5GN	100
EPCMS2.5	50
CA601	50 m
CA602	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack

# SIDE ENTRY FEED THROUGH & GROUND / EARTH TERMINAL BLOCKS

These are feed through spring clamp side wire entry Terminal Block. It is specially designed for mounting location with low installation height.

This Terminal Block can be actuated from side as well as from the top using standard screw driver.


Width (Thickness) x Length	5 x 45.9 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	43.5 mm / 50.8 mm			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 18 AWG	
Wire Stripping Length	9 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	1000 V	600 V	600 V	630 V
Current	24 A	20 A	20 A	21 A
Approval				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3			



		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CXS2.5	50
	Blue	CXS2.5BU	50
	Red	CXS2.5R	50
	Yellow	CXS2.5Y	50
	Black	CXS2.5BK	50
	Green	CXS2.5GN	50
	Ground / Earth	CXSG2.5	50
	End Plate	EPCXS2.5	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100	
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10	

Shorting Links		Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10
	Test Plug	TX2.5		50

CXS4



6 x 45.9 mm  
43.5 mm / 50.8 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 18 AWG

10 mm

IEC60947-7-1 UL-1059

1000 V	600 V		
32 A	35 A		



Polyamide 6,6 / 1

8 KV / 3


CXSG2.5



5 x 45.9 mm  
43.5 mm / 50.8 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 18 AWG


9 mm



Polyamide 6,6 / 1

8 KV / 3

CXSG4



6 x 45.9 mm  
43.5 mm / 50.8 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 18 AWG

10 mm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CXS4	50
CXSG4	50
EPCXS2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Standard Pack
CXSG2.5	50
EPCXS2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Standard Pack
CXSG4	50
EPCXS2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10



# COMPACT HYBRID DISTRIBUTION TERMINAL BLOCK


CXDB35/10 is a compact Distribution Terminal Block. It is designed to suit standard Miniature Circuit Breaker (MCB) distribution boxes.

The terminal block is capable of accepting 35 mm<sup>2</sup> cables at the input side and 4 wires of 10 mm<sup>2</sup> can be connected at the output side.



The input cable is connected with a standard screw clamp system and the output wires can be connected with quick and reliable Spring clamp connections.

CXDB35/10 is a modular system and standard JX series jumpers can be used to add more connection points.

For distribution applications please note that the total system current should not exceed the allowed 125 Ampere criteria.

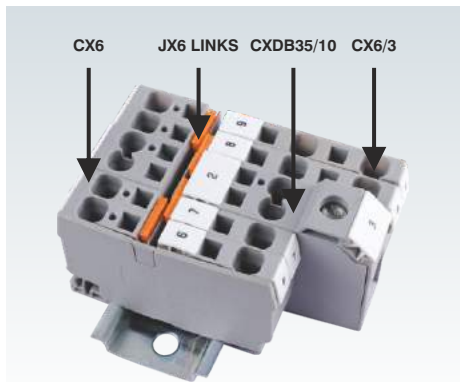

## CXDB35/10

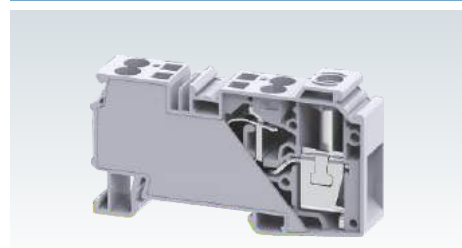

Width (Thickness) x Length	16 X 81.6 mm
Height with DIN 35 x 7.5 / 35 x 15 Rail	46.8 mm / 54.3 mm

Connection Possibility at Input as per	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug
With 2 same size Conductors per clamp	Stranded / Flexible with TWIN Ferrule / Lug
Wire Stripping Length	17 mm

IEC	UL - CSA
1.5 - 35.0 mm <sup>2</sup>	14 - 2 AWG
1.5 - 35.0 mm <sup>2</sup>	14 - 2 AWG
1.5 - 10.0 mm <sup>2</sup>	12 - 4 AWG
1.5 - 10.0 mm <sup>2</sup>	12 - 8 AWG
Wire Stripping Length	17 mm

Connection Possibility at Output as per	
With 1 Conductor per clamp	Stranded / Flexible Solid with Ferrule / Lug
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug
Wire Stripping Length	15 mm

IEC	UL - CSA
0.2 - 10.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 10.0 mm <sup>2</sup>	24 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
Wire Stripping Length	15 mm

Ratings at Input As Per	
Voltage	1000 V
Current	125 A
Torque	2.5 Nm

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
125 A	115 A	115 A
2.5 Nm	25 lb-in	25 lb-in

Ratings at Output As Per	
Voltage	1000 V
Current	41 A

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
41 A	41 A	41 A

Approvals	
Insulation Material / Material Group	Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree	8 KV / 3

Insulation Material / Material Group	Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree	8 KV / 3

Terminal Block	With Slotted Screw With Allen Screw	
Mounting Rail	(Refer Pg. 219 for details)	
End Clamp	(Refer Pg. 220 for details)	
Marking Tags	(Refer Pg. 224 for details)	
Screw Driver	Screw Clamp Spring Clamp	

Type / Cat. No.	Standard Pack
CXDB35/10	20
CXDB35/10A	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K16WHT	100
SCM1/5.5	Blade size: 1.0 x 5.5 mm
SCM0.8/4	Blade size: 0.8 x 4 mm


Shorting Links	
	2 pole
	3 pole
	4 pole
	10 pole

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX6/2	41 A	100
JX6/3	41 A	50
JX6/4	41 A	50
JX6/10	41 A	10

# COMPONENT CARRIER TERMINAL BLOCKS

CXCC4 Spring Clamp Terminal Block is a component carrier base. Various pluggable component carriers can be installed easily. These component carriers have built in protection against incorrect polarity.

Width (Thickness) x Length	6 x 65.4 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	61.5 mm / 69 mm			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG	
Wire Stripping Length	10 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	1000 V	600 V	600 V	630 V
Current	*	*	*	*
Approval				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	4 KV / 3			

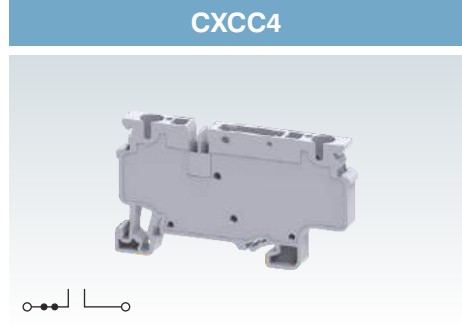



	Type / Cat. No.	Standard Pack
Terminal Block	CXCC4	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA702	50
	CA802	50
	CA103	50
Shorting Link	JX4/2	I <sub>max.</sub> : 32 A / 100
	JX4/3	32 A / 50
	JX4/4	32 A / 50
	JX4/8	32 A / 10
	JX4/10	32 A / 10
	Warning Label	SWL6
Test Plug	TX4	50
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10

\* Current Rating based on component carriers

# COMPONENT CARRIERS

CPD1 is component plug with built in diode 1N4007 (Not to be used with fuse). CPF is component fuse plug suitable for Ø 5 x 20 mm fuses. CPFL is component plug which provides offline indication in case of a blown off fuse. These plugs can be used with CXCC4 Terminal Block.

	CPD1		CPF		CIP	
	Type / Cat. No.	Std. Pack	Type / Cat. No.	Std. Pack	Type / Cat. No.	Std. Pack
Component Carrier	CPD1	50	CPF	50	CIP	50
With Diode For Ø 5 x 20 mm Fuse			CPFL6-60V	50		
Fuse with 6-60V AC/DC LED Circuit			CPFL110-240V	50		
Fuse with 110-240V AC/DC LED Circuit						
Width (Thickness) x Length x Height	6 x 28 x 35 mm		6 x 28 x 35 mm		5.4 x 17.45 x 26 mm	
Current Rating *	1 A		6.3 A & 10 A		10 A	
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100	CA509/K6WHT	100		



# PLUGGABLE TERMINAL BLOCKS

Connectwell pluggable series Terminal Blocks are an excellent solution for creating wire harnesses which ease field wire connections.

CX2.5/1B terminal is DIN rail mounted base Terminal Block. Standard shorting links and marking tags can be installed on the base terminal. The base Terminal Block has a provision for installing CX2.5PN series plugs.

CXDL2.5/2B terminal is a double level DIN rail mounted base Terminal Block. Standard shorting links and marking tags can be installed on the base terminal. The base Terminal Block has a provision for installing CX2.5PN series plugs.

CX2.5PN series plugs can be inserted in standard base Terminal Blocks. CX2.5PLN should be used as a last covering element along with CX2.5PN terminals to make a complete assembly.

These plug assemblies can be polarized by cutting the integral stubs.

Subsequently standard polarizing pins CXPOLN can be used in the base Terminal Block to receive these polarized plugs.

CXLPN locking clips are installed on the plugs to ensure positive engagement with the base Terminal Block.

CXSR series strain relief plates are used in conjunction with the plug assemblies to secure wires using standard wire ties.


CX2.5SN is a free floating base terminal. CXDIN mounting feet can be installed on this free floating base terminal to enable mounting on DIN rails.

Various wire and plug receptacle base terminal options are available to create unique wire harnessing solutions.

Standard green yellow ground/earth base Terminal Blocks are also available for grounding applications.

Width (Thickness) x Length		5 x 50.8 mm
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		38.2 mm / 45.7 mm
Connection Possibility as per		IEC
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>
	Solid	0.2 - 4.0 mm <sup>2</sup>
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>
Wire Stripping Length		10 mm
Ratings As Per		IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7
Voltage		500 V 300 V 600 V 630 V
Current		24 A 20 A 20 A 21 A
Approval		IECEE CE UL US C-UL
Insulation Material / Material Group		Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree		8 KV / 3

## CX2.5/1B

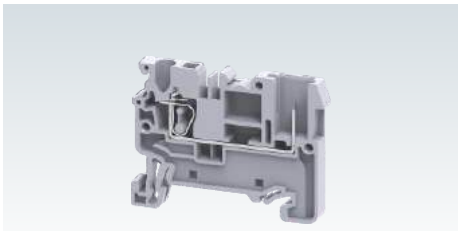


Type / Cat. No.		Standard Pack	
CX2.5/1B		100	

Terminal Block	Grey
----------------	------

Type / Cat. No.	Standard Pack
CX2.5/1B	100

## CXG2.5/1B

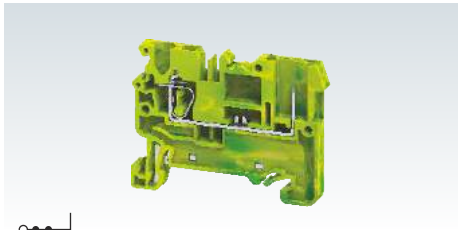


Terminal Block	Ground / Earth
End Plate	
Partition Plate	
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Warning Label	
Marking Tags (Refer Pg. 224 for details)	
Coding Pin	
Screw Driver	

Type / Cat. No.	Standard Pack
CXG2.5/1B	100
EPCX2.5	50
PPCX4	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
CXPOLN	25
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Shorting Links	
	2 pole
	3 pole
	4 pole
	5 pole
	6 pole
	7 pole
	8 pole
	10 pole
Test Plug	

Type / Cat. No.	Imax	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		20

**CX2.5/2B**



5 x 51.2 mm  
38.2 mm / 45.7 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG

10 mm


IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
500 V	300 V	600 V	630 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CX2.5/2B	100

**CX2.5/3/1B**



5 x 63 mm  
38.2 mm / 45.7 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG

10 mm


IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
500 V	300 V	600 V	630 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CX2.5/3/1B	100

**CX2.5/4/2B**



5 x 83.5 mm  
38.2 mm / 45.7 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.0 mm <sup>2</sup>	24 - 20 AWG

10 mm


IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
500 V	300 V	600 V	630 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
CX2.5/4/2B	50


**CXG2.5/2B**



Type / Cat. No.	Standard Pack
CXG2.5/2B	100
EPCX2.5	50
PPCX4	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
CXPOLN	25
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		20


**CXG2.5/3/1B**



Type / Cat. No.	Standard Pack
CXG2.5/3/1B	100
EPCX2.5/3	50
PPCX4/3	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
CXPOLN	25
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		20

**CXG2.5/4/2B**




Type / Cat. No.	Standard Pack
CXG2.5/4/2B	100
EPCX2.5/4/2B	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
WLX2.5	100
CA509/K5WHT	100
CXPOLN	25
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		20

# PLUGGABLE TERMINAL BLOCKS


## CX2.5/4/4B

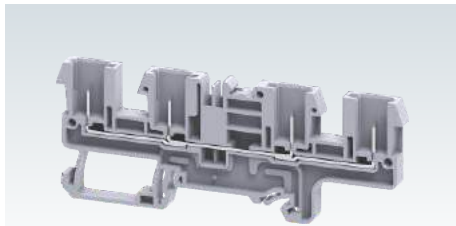

Width (Thickness) x Length	5 x 97.2 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38.2 mm / 45.7 mm	
Connection Possibility as per	IEC	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>
		0.2 - 4.0 mm <sup>2</sup>
	Solid with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059 CSA22.2-158 IEC60079-7
Voltage	500 V	300 V 600 V 630 V
Current	24 A	20 A 20 A 21 A
Approval	CE	
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

Width (Thickness) x Length	5 x 97.2 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38.2 mm / 45.7 mm	
Connection Possibility as per	IEC	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>
		0.2 - 4.0 mm <sup>2</sup>
	Solid with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059 CSA22.2-158 IEC60079-7
Voltage	500 V	300 V 600 V 630 V
Current	24 A	20 A 20 A 21 A
Approval	CE	
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

## CXDL2.5/2B

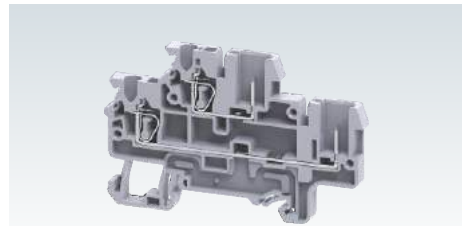


Width (Thickness) x Length	5 x 78 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	49.5 mm / 57 mm	
Connection Possibility as per	IEC	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>
		0.2 - 4.0 mm <sup>2</sup>
	Solid with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059 CSA22.2-158 IEC60079-7
Voltage	500 V	300 V 600 V 630 V
Current	24 A	20 A 20 A 21 A
Approval	CE	
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

Type / Cat. No.	Standard Pack
Terminal Block	Grey
CX2.5/4/4B	50

Type / Cat. No.	Standard Pack
Terminal Block	Grey
CXDL2.5/2B	50

Type / Cat. No.	Standard Pack
Terminal Block	Grey
CXDL2.5/2B	50


## CXG2.5/4/4B

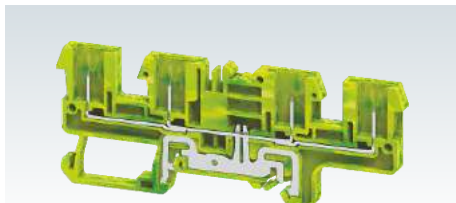

Type / Cat. No.	Standard Pack
Terminal Block	Ground / Earth
End Plate	EPCX2.5/4/4B
Partition Plate	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S
End Clamp (Refer Pg. 220 for details)	CA103 / CA104
Warning Label	WLX2.5
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT
Coding Pin	CXPOLN
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm

Type / Cat. No.	Standard Pack
Terminal Block	Ground / Earth
End Plate	EPCXDL2.5/2B
Partition Plate	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S
End Clamp (Refer Pg. 220 for details)	CA103 / CA104
Warning Label	WLX2.5
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT
Coding Pin	CXPOLN
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm

## CXDLG2.5/2B

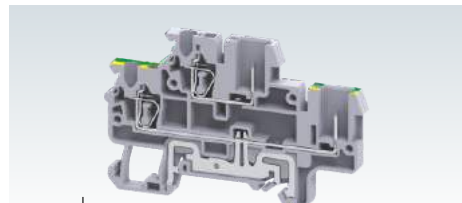


Type / Cat. No.	Standard Pack
Terminal Block	Ground / Earth
End Plate	EPCXDL2.5/2B
Partition Plate	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S
End Clamp (Refer Pg. 220 for details)	CA103 / CA104
Warning Label	WLX2.5
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT
Coding Pin	CXPOLN
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX2.5/2	24 A 100	
	3 pole	JX2.5/3	24 A 50	
	4 pole	JX2.5/4	24 A 50	
	5 pole	JX2.5/5	24 A 50	
	6 pole	JX2.5/6	24 A 10	
	7 pole	JX2.5/7	24 A 10	
	8 pole	JX2.5/8	24 A 10	
	10 pole	JX2.5/10	24 A 10	
	Test Plug	TX2.5		20

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX2.5/2	24 A 100	
	3 pole	JX2.5/3	24 A 50	
	4 pole	JX2.5/4	24 A 50	
	5 pole	JX2.5/5	24 A 50	
	6 pole	JX2.5/6	24 A 10	
	7 pole	JX2.5/7	24 A 10	
	8 pole	JX2.5/8	24 A 10	
	10 pole	JX2.5/10	24 A 10	
	Test Plug	TX2.5		20

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX2.5/2	24 A 100	
	3 pole	JX2.5/3	24 A 50	
	4 pole	JX2.5/4	24 A 50	
	5 pole	JX2.5/5	24 A 50	
	6 pole	JX2.5/6	24 A 10	
	7 pole	JX2.5/7	24 A 10	
	8 pole	JX2.5/8	24 A 10	
	10 pole	JX2.5/10	24 A 10	
	Test Plug	TX2.5		20

### CXDL2.5/2B(I.S)



5 x 78 mm

49.5 mm / 57 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.2 - 1.0 mm<sup>2</sup>      24 - 20 AWG

10 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
500 V	300 V	600 V	630 V
24 A	20 A	20 A	21 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CXDL2.5/2B(I.S)	50

### CXDLG2.5/2B(I.S)



Type / Cat. No.	Standard Pack
CXDLG2.5/2B(I.S)	50
EPCXDL2.5/2B	50

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m


CA103 / CA104	50
WLX2.5	100

CA509/K5WHT	100
-------------	-----

CXPOLN	25
--------	----


SCM0.5/3      Blade size: 0.5 x 3 mm	10
--------------------------------------	----

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		20

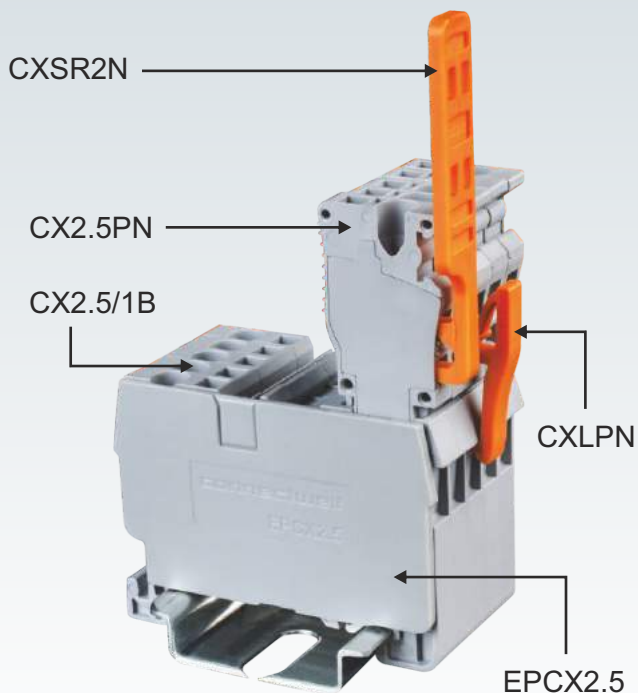

# PLUGGABLE TERMINAL BLOCKS

## CX2.5PN


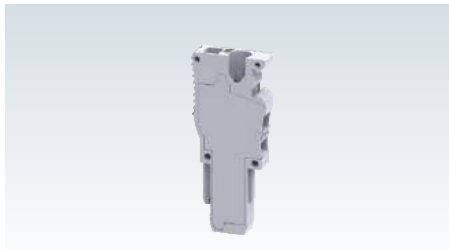


## CX2.5SN



Width (Thickness) x Length	5 x 17.5 mm		5 (With End Plate 7.5 mm) x 18 mm	
Height	42 mm		40 mm	
Connection Possibility as per	IEC	UL - CSA	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	0.2 - 2.5 mm <sup>2</sup>
	Solid	0.2 - 4.0 mm <sup>2</sup>		0.2 - 4.0 mm <sup>2</sup>
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG	0.2 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG	0.2 - 1.5 mm <sup>2</sup>
Wire Stripping Length	8 mm		8 mm	
Ratings As Per	IEC60947-7-1	UL-1059	IEC60947-7-1	UL-1059
Voltage	500 V	300 V	500 V	300 V
Current	24 A	20 A	24 A	20 A
Approvals				
Insulation Material / Material Group	Polyamide 6,6 / 1		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3		8 KV / 3	

			CX2.5PN		CX2.5SN		
			Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack	
Connector	Start Element	1	CX2.5PN	50	CX2.5SN	50	
		Last Element	1	CX2.5PLN	50		
			2	CX2.5PN/2	50	CX2.5SN/2	50
			3	CX2.5PN/3	50	CX2.5SN/3	50
			4	CX2.5PN/4	50	CX2.5SN/4	50
			5	CX2.5PN/5	50	CX2.5SN/5	50
			6	CX2.5PN/6	25	CX2.5SN/6	25
			7	CX2.5PN/7	25	CX2.5SN/7	25
			8	CX2.5PN/8	25	CX2.5SN/8	25
			9	CX2.5PN/9	25	CX2.5SN/9	25
			10	CX2.5PN/10	25	CX2.5SN/10	25
			11	CX2.5PN/11	10	CX2.5SN/11	10
			12	CX2.5PN/12	10	CX2.5SN/12	10
			13	CX2.5PN/13	10	CX2.5SN/13	10
			14	CX2.5PN/14	10	CX2.5SN/14	10
		15	CX2.5PN/15	10	CX2.5SN/15	10	
End Plate					EPCX2.5SN	50	
Locking Clip			CXLPN	25			
2 Way Strain Relief			CXSR2N	25	CXSR2N	25	
4 Way Strain Relief			CXSR4N	25	CXSR4N	25	
Mounting Feet					CXDIN	25	
Coding Pin					CXPOLN	25	
Mounting Rail (Refer Pg. 219 for details)			CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m	
			CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)			CA103 / CA104	50	CA103 / CA104	50	
Screw Driver for actuating the Spring Clamp			SCM0.5/3 Blade size: 0.5 x 3 mm	10	SCM0.5/3 Blade size: 0.5 x 3 mm	10	
Actuator for actuating the Spring Clamp			SCA2.5	1	SCA2.5	1	
Marking Tags (Refer Pg. 224 for details)			CA509/K5WHT	100	CA509/K5WHT	100	

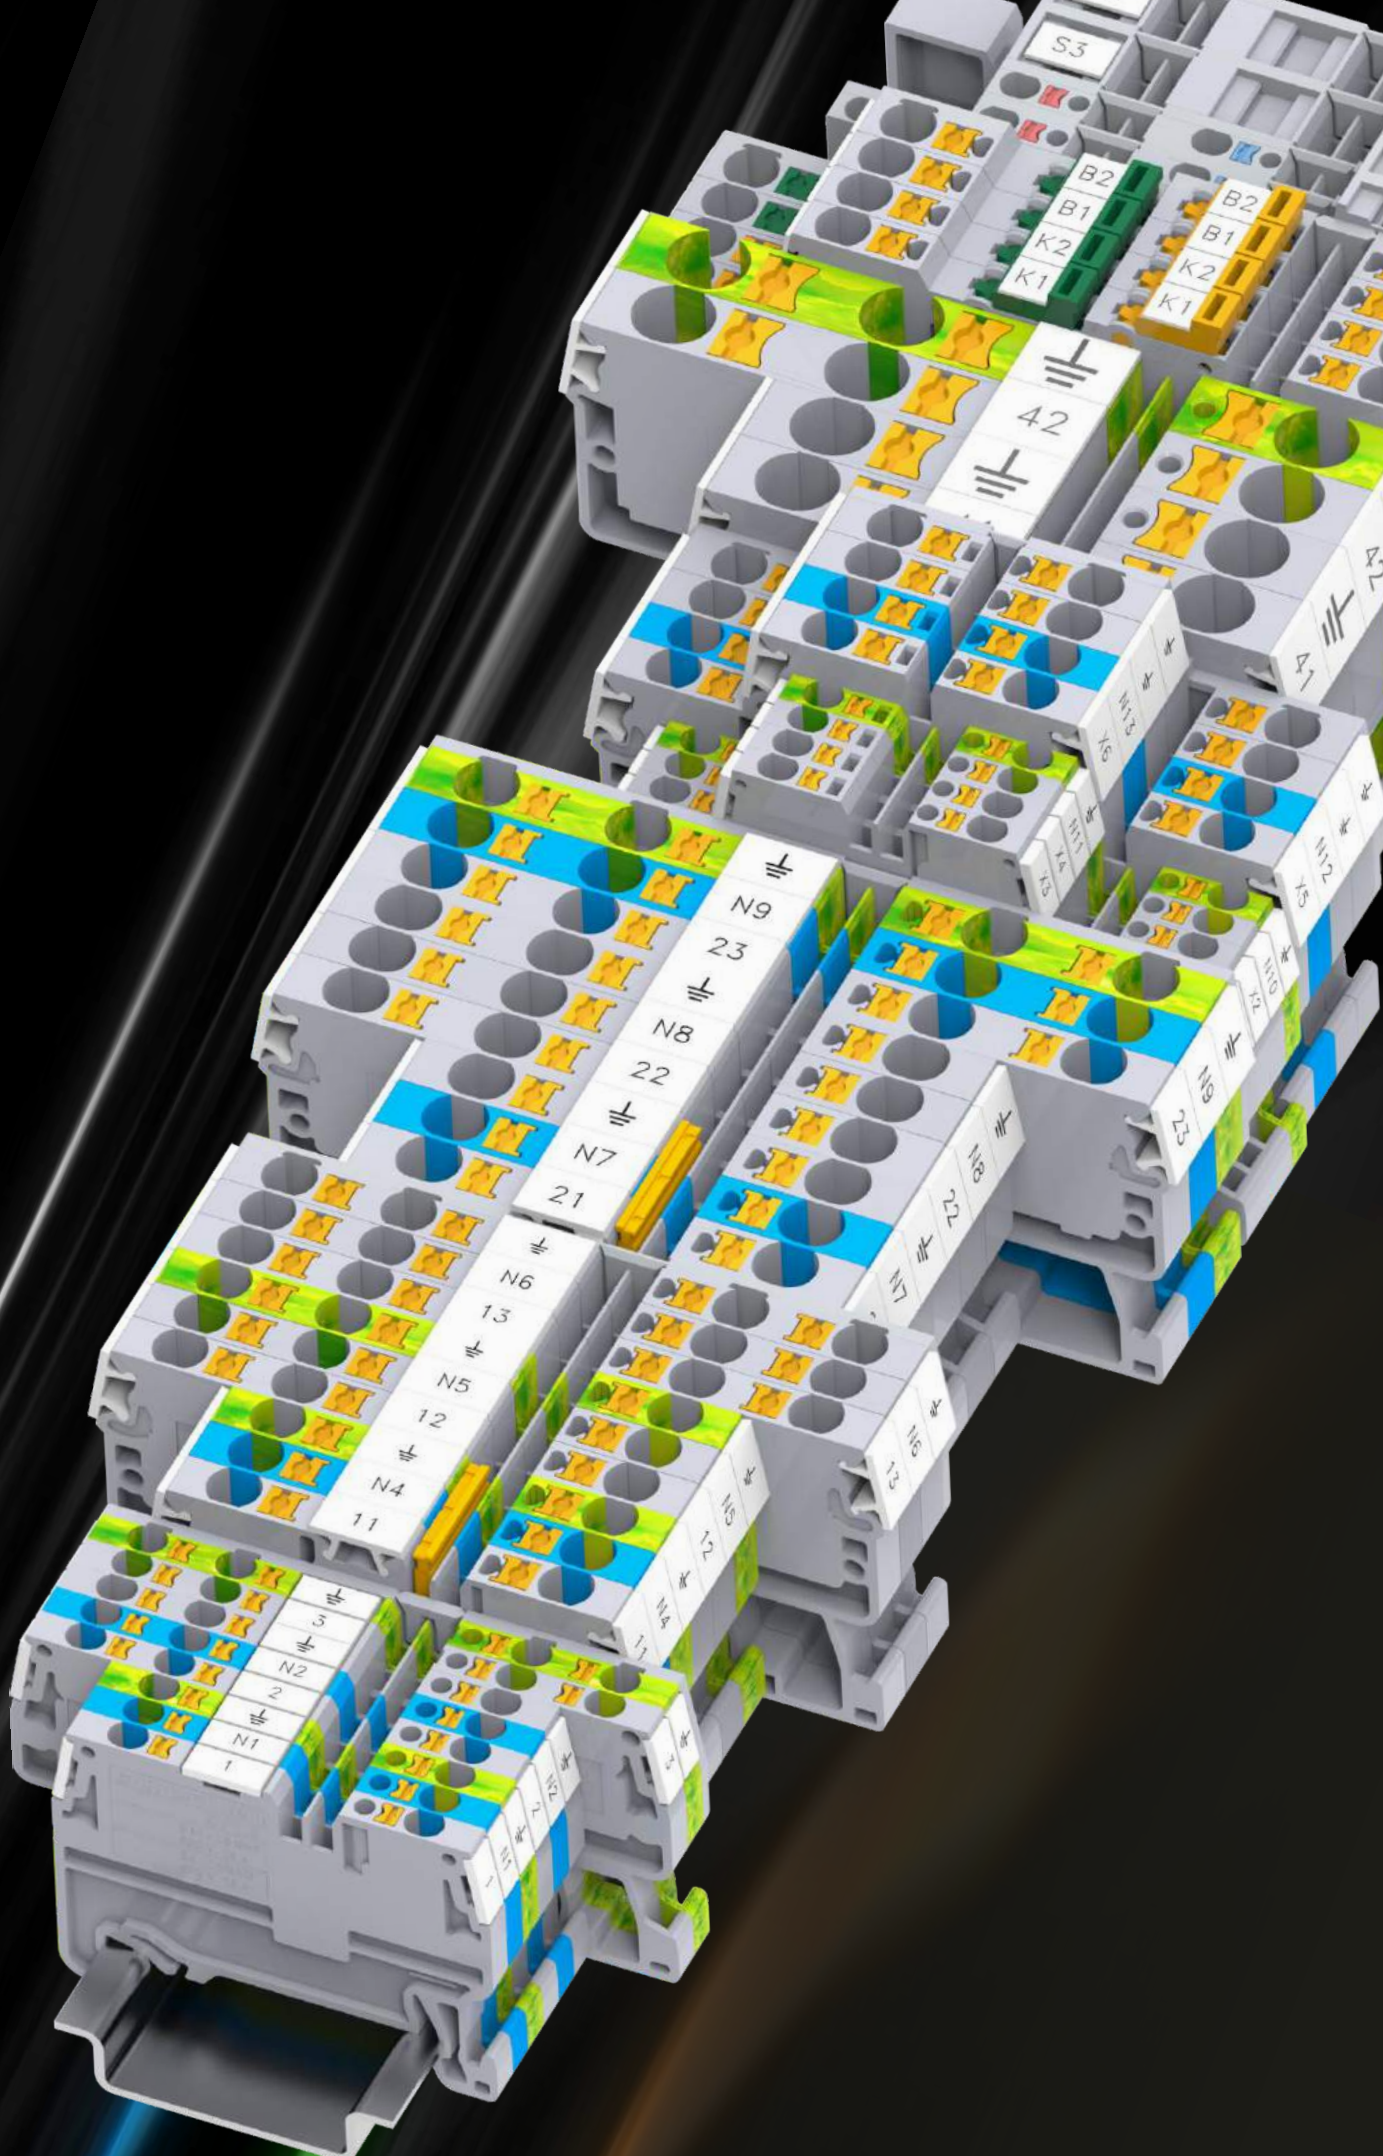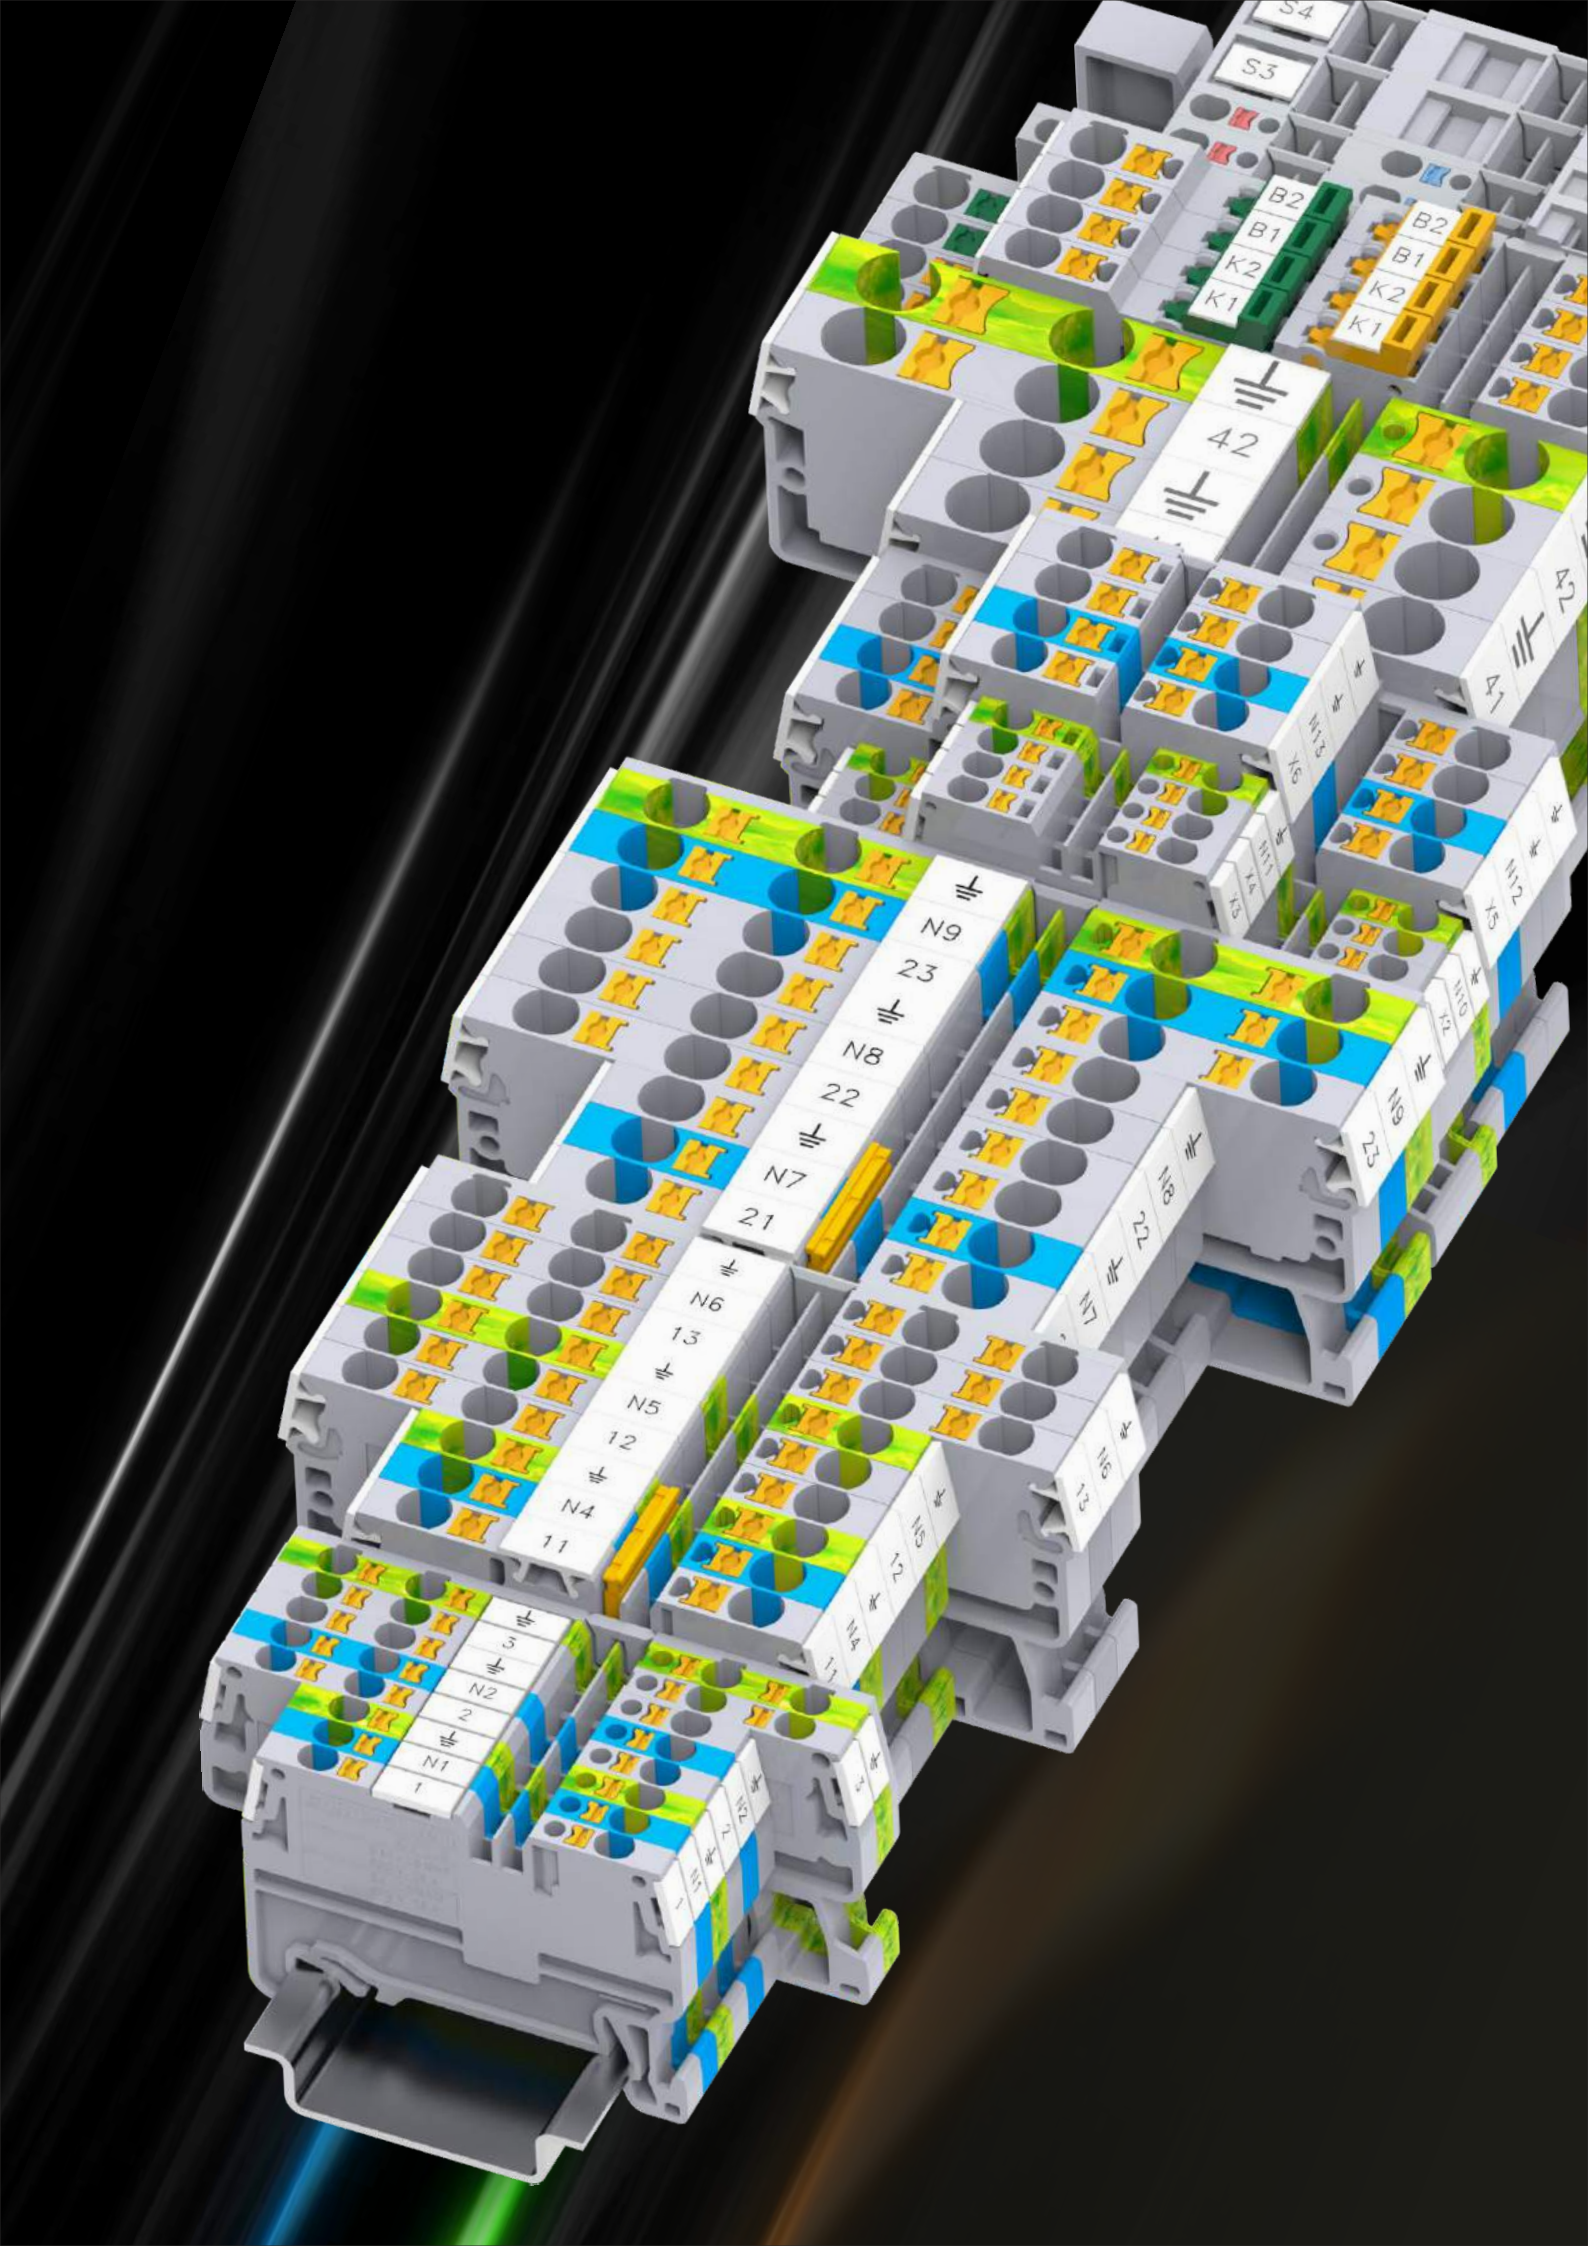



# ANGULAR FEED THROUGH TERMINAL BLOCKS

These Terminal Blocks are an ideal choice for compact junction boxes having limitations of space and height. These terminals are also used for underfloor wiring systems.

A major advantage of Angular Terminal Blocks over the top wire entry Terminal Blocks is that their profile remains the same across the entire range of Feed Through, Multiple Connection, Ground and Ground Multiple Connection Terminal Blocks.

The other advantages include: Angular entry of wires saves conductor length, marking / identification facility on the center (top) of the block, Multiplication of connections through bridging.

Step Down shorting links are used for shorting spring clamp Terminal Blocks of different sizes. For more details refer page 226.

The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.

Width (Thickness) x Length	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	
Connection Possibility as per	
With 1 Conductor per clamp	Stranded / Flexible Solid with Ferrule / Lug
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug
Wire Stripping Length	
Ratings As Per	
Voltage	
Current	
Approvals	
Insulation Material / Material Group	
Rated Impulse Voltage / Pollution Degree	

## AS2.5



5 x 54 mm			
44.0 mm / 51.0 mm			
IEC		UL - CSA	
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG		
0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG		
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG		
0.34 - 1.5 mm <sup>2</sup>		22 - 14 AWG	
11 mm			
IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7			
800 V	600 V	600 V	630 V
24 A	25 A	25 A	21 A
Polyamide 6,6 / 1			
8 KV / 3			

Terminal Block	Grey Blue Red Yellow Black Green Ground / Earth
End Plate	
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Marking Tags (Refer Pg. 224 for details)	
Screw Driver	

Type / Cat. No.	Standard Pack
AS2.5	100
AS2.5BU	100
AS2.5R	100
AS2.5Y	100
AS2.5BK	100
AS2.5GN	100
AGT2.5 (Refer Pg. 155 for details)	100
EPAS2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3.0 mm	10

Shorting Links	
Insulated Push-In Type Shorting Link (2 pole)	
Alternate Link	
Insulated Push-In Type (wire) Shorting Link	
Step Down Shorting Link	

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/1	24 A	100
CA801/1-3	24 A	100
CA901/1	17.5 A	100
CA901/5	32 A	100
CA901/6	32 A	100

### AS4



6 x 61.5 mm

44.0 mm / 51.0 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
---------------------------	-------------

15 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

800 V	600 V	600 V	630 V
32 A	35 A	35 A	28 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
AS4	100
AS4BU	100
AS4R	100
AS4Y	100
AS4BK	100
AS4GN	100
AGT4 (Refer Pg. 156 for details)	100
EPAS4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/2	20 A	100
CA801/2-3	20 A	100
CA901/2	17.5 A	100
CA901/4	20 A	100
CA901/6	32 A	100

### AS6

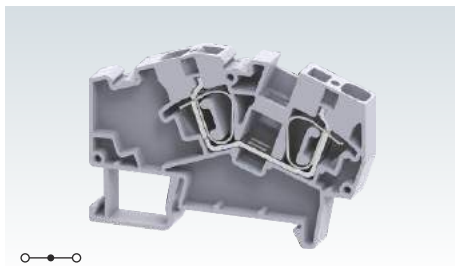

8 x 74 mm

49.3 mm / 57.0 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG

0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
---------------------------	-------------

15 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

800 V	600 V	600 V	630 V
41 A	50 A	50 A	36 A



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
AS6	50
AS6BU	50
AS6R	50
AS6Y	50
AS6BK	50
AS6GN	50
AGT6 (Refer Pg. 156 for details)	50
EPAS6	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/3	35 A	100
CA801/3-3	30 A	100
CA901/3	30 A	100
CA901/4	30 A	100
CA901/5	32 A	100
CA801/8	41 A	100

### AS2.5/3



5 x 54 mm

44.0 mm / 51.0 mm

IEC	UL - CSA
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG

0.34 - 1.5 mm <sup>2</sup>	22 - 14 AWG
----------------------------	-------------

11 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7

800 V	600 V	600 V	630 V
24 A	25 A	25 A	21 A



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
AS2.5/3	100
AS2.5/3BU	100
AS2.5/3R	100
AS2.5/3Y	100
AS2.5/3BK	100
AS2.5/3GN	100
AGT2.5/3 (Refer Pg. 156 for details)	100
EPAS2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/1	24 A	100
CA801/1-3	24 A	100
CA901/1	17.5 A	100
CA901/5	32 A	100
CA901/6	32 A	100



# ANGULAR FEED THROUGH TERMINAL BLOCKS

## AS2.5/4



## AS4/3



Width (Thickness) x Length		5 x 54 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		44.0 mm / 51.0 mm	
Connection Possibility as per		IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
	Solid	0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	with Ferrule / Lug	0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.34 - 1.5 mm <sup>2</sup>	22 - 14 AWG
Wire Stripping Length		11 mm	
Ratings As Per		IEC60947-7-1	UL-1059 CSA22.2-158 IEC 60079-7
Voltage		800 V	600 V 600 V 630 V
Current		24 A	25 A 25 A 21 A
Approvals			
Insulation Material / Material Group		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	

Width (Thickness) x Length		6 x 61.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		44.0 mm / 51.0 mm	
Connection Possibility as per		IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	Solid	0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length		15 mm	
Ratings As Per		IEC60947-7-1	UL-1059 CSA22.2-158 IEC 60079-7
Voltage		800 V	600 V 600 V 630 V
Current		32 A	35 A 35 A 28 A
Approvals			
Insulation Material / Material Group		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	

Width (Thickness) x Length		6 x 61.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		44.0 mm / 51.0 mm	
Connection Possibility as per		IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	Solid	0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length		15 mm	
Ratings As Per		IEC60947-7-1	UL-1059 CSA22.2-158 IEC 60079-7
Voltage		800 V	600 V 600 V 630 V
Current		32 A	35 A 35 A 28 A
Approvals			
Insulation Material / Material Group		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	AS2.5/4	100
	Blue	AS2.5/4BU	100
	Red	AS2.5/4R	100
	Yellow	AS2.5/4Y	100
	Black	AS2.5/4BK	100
	Green	AS2.5/4GN	100
	Ground / Earth	AGT2.5/4 (Refer Pg. 157 for details)	100
End Plate	EPAS2.5	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100	
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10	

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	AS4/3	100
	Blue	AS4/3BU	100
	Red	AS4/3R	100
	Yellow	AS4/3Y	100
	Black	AS4/3BK	100
	Green	AS4/3GN	100
	Ground / Earth	AGT4/3 (Refer Pg. 157 for details)	100
End Plate	EPAS4	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100	
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10	

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	AS4/3	100
	Blue	AS4/3BU	100
	Red	AS4/3R	100
	Yellow	AS4/3Y	100
	Black	AS4/3BK	100
	Green	AS4/3GN	100
	Ground / Earth	AGT4/3 (Refer Pg. 157 for details)	100
End Plate	EPAS4	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100	
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10	

	Type / Cat. No.	Imax	Standard Pack
Insulated Push-In Type Shorting Link (2 pole)			
Alternate Link			
Insulated Push-In Type (wire) Shorting Link			
Step Down Shorting Link			

	Type / Cat. No.	Imax	Standard Pack
Insulated Push-In Type Shorting Link (2 pole)	CA801/2	20 A	100
	CA801/2-3	20 A	100
Alternate Link	CA901/2	17.5 A	100
Insulated Push-In Type (wire) Shorting Link	CA901/4	20 A	100
	CA901/6	32 A	100
Step Down Shorting Link			

	Type / Cat. No.	Imax	Standard Pack
Insulated Push-In Type Shorting Link (2 pole)	CA801/2	20 A	100
	CA801/2-3	20 A	100
Alternate Link	CA901/2	17.5 A	100
Insulated Push-In Type (wire) Shorting Link	CA901/4	20 A	100
	CA901/6	32 A	100
Step Down Shorting Link			

**AS4/4**



6 x 61.5 mm  
44.0 mm / 51.0 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG


15 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7
800 V	600 V	600 V	630 V
32 A	35 A	35 A	28 A



Polyamide 6,6 / 1  
8 KV / 3

**AS6/3**



8 x 74 mm  
49.3 mm / 57.0 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

15 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC 60079-7
800 V	600 V	600 V	630 V
41 A	50 A	50 A	36 A




Polyamide 6,6 / 1  
8 KV / 3

Type / Cat. No.	Standard Pack
AS4/4	50
AS4/4BU	50
AS4/4R	50
AS4/4Y	50
AS4/4BK	50
AS4/4GN	50
AGT4/4 (Refer Pg. 158 for details)	50
EPAS4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Standard Pack
AS6/3	50
AS6/3BU	50
AS6/3R	50
AS6/3Y	50
AS6/3BK	50
AS6/3GN	50
AGT6/3 (Refer Pg. 158 for details)	50
EPAS6	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10


Type / Cat. No.	I <sub>max</sub>	Standard Pack



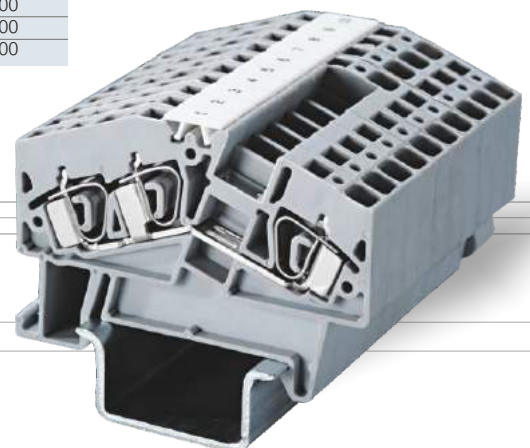


Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/3	35 A	100
CA801/3-3	30 A	100
CA901/3	30 A	100
CA901/4	30 A	100
CA901/5	32 A	100
CA801/8	41 A	100




# ANGULAR GROUND / EARTH TERMINAL BLOCKS


Besides having angular wire entry, these Terminal Blocks have specially designed alloy feet which help in achieving very low contact resistance and vibration proof grounding with the DIN rails. They are Green-Yellow colour coded as per industry standards.

The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.

<b>Width (Thickness) x Length</b>		5 x 54 mm	
<b>Height with DIN 35 x 7.5 / 35 x 15 mm Rail</b>		44.0 mm / 51.6 mm	
<b>Connection Possibility as per</b>		<b>IEC</b>	<b>UL - CSA</b>
With 1 Conductor per clamp	Stranded / Flexible	0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
	Solid with Ferrule / Lug	0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
		0.34 - 1.5 mm <sup>2</sup>	22 - 14 AWG
<b>Wire Stripping Length</b>		11 mm	
<b>Approvals</b>			
<b>Insulation Material / Material Group</b>		Polyamide 6,6 / 1	
<b>Rated Impulse Voltage / Pollution Degree</b>		8 KV / 3	
		<b>Type / Cat. No.</b>	<b>Standard Pack</b>
Terminal Block		AGT2.5	100
End Plate 		EPAS2.5	50
Mounting Rail (Refer Pg. 219 for details) 		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
Marking Tags (Refer Pg. 224 for details) 		CA509/K5WHT	100
Screw Driver 		SCM0.5/3 Blade size: 0.5 x 3 mm	10

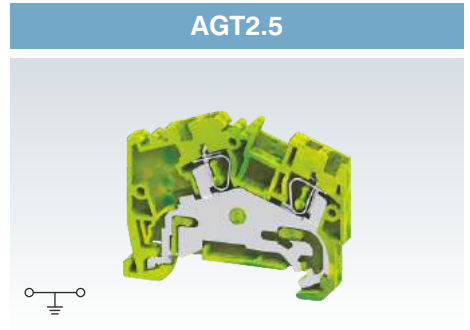

**AGT4**



6 x 61.5 mm

44.0 mm / 51.6 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

15 mm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
AGT4	100
EPAS4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

**AGT6**

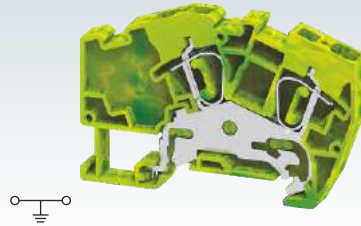

8 x 74 mm

49.3 mm / 57.0 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG

15 mm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
AGT6	50
EPAS6	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

**AGT2.5/3**



5 x 54 mm

44.0 mm / 51.6 mm

IEC	UL - CSA
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 1.5 mm <sup>2</sup>	22 - 14 AWG


11 mm



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
AGT2.5/3	100
EPAS2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

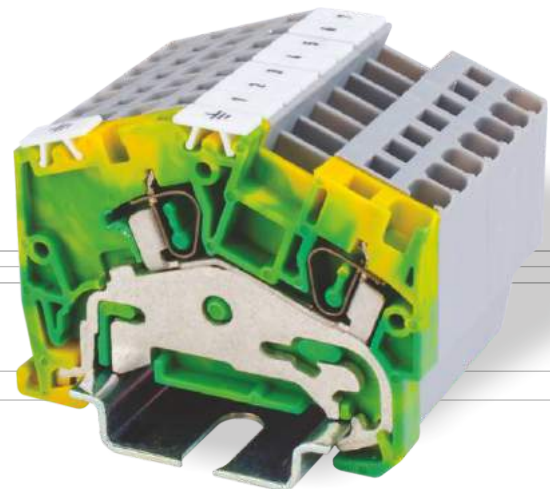

# ANGULAR GROUND / EARTH TERMINAL BLOCKS

## AGT2.5/4

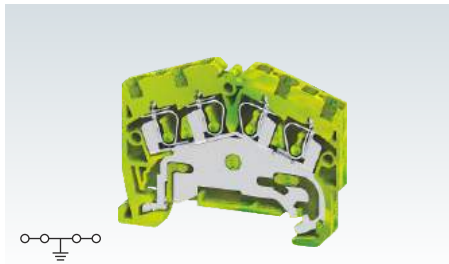


## AGT4/3



Width (Thickness) x Length	5 x 54 mm		6 x 61.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	44.0 mm / 51.6 mm		44.0 mm / 51.6 mm	
Connection Possibility as per	IEC	UL - CSA	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG	0.2 - 4.0 mm <sup>2</sup>
	Solid	0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG	0.2 - 6.0 mm <sup>2</sup>
	with Ferrule / Lug	0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG	0.2 - 4.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.34 - 1.5 mm <sup>2</sup>	22 - 14 AWG	0.2 - 2.5 mm <sup>2</sup>
Wire Stripping Length	11 mm		15 mm	
Approvals				
Insulation Material / Material Group	Polyamide 6,6 / 1		Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3		8 KV / 3	
	<b>Type / Cat. No.</b>	<b>Standard Pack</b>	<b>Type / Cat. No.</b>	<b>Standard Pack</b>
Terminal Block	AGT2.5/4	100	AGT4/3	100
End Plate	EPAS2.5	50	EPAS4	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m
Marking Tags (Refer Pg. 224 for details)	CA509/K5WHT	100	CA509/K6WHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10	SCM0.5/3 Blade size: 0.5 x 3 mm	10

### AGT4/4



6 x 61.5 mm  
44.0 mm / 51.6 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

15 mm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
AGT4/4	100
EPAS4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

### AGT6/3

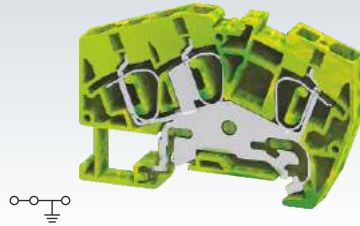

8 x 74 mm  
49.3 mm / 57.0 mm

IEC	UL - CSA
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 6.0 mm <sup>2</sup>	22 - 8 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG


15 mm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
AGT6/3	50
EPAS6	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

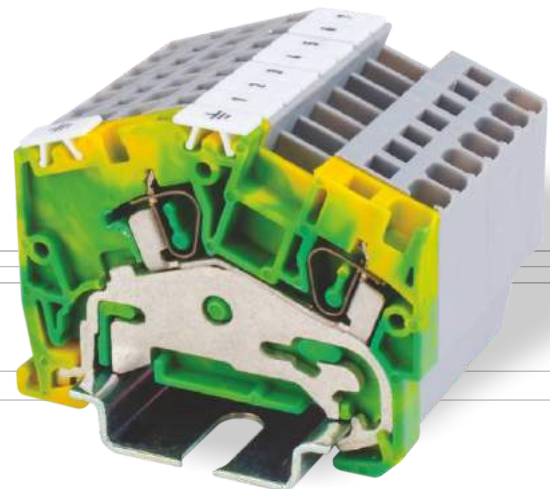




# PANEL MOUNT TERMINAL BLOCKS


CM series Terminal Blocks have a side wire entry configuration. These blocks are an excellent solution for extremely compact wiring applications. The Terminal Blocks are "modular" and can be stacked to form multipole assemblies. The stacked assemblies can be mounted on the panel surface using an End Plate at one end only.

These Terminal Blocks are perfect solution for industries like Control Transformer, Elevators, Junction Boxes and applications with limited wiring space.


CSCP2.5T & CSCP2.5T2 Terminal Blocks have top wire entry. Shorting Link can be easily inserted by using Spring Clamp Actuator tool SCA2.5.




The CXCP2.5/4 Terminal Block has the same profile as the CSCP2.5T terminals and can be stacked together with them. The CXCP2.5/4 terminals can be mounted on standard DIN Rails.

The terminals with  & IECEx approval can be used in potentially explosive atmosphere. For detailed information refer page 243.

Width (Thickness) x Length	5 x 26.5 mm			
Height	18 mm (Panel Mount)			
Connection Possibility as per	IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG	
	Solid with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 16 AWG	
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 0.5 mm <sup>2</sup>	24 - 20 AWG	
Wire Stripping Length	8 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	500 V	300 V	300 V	320 V
Current	17 A	10 A	10 A	15 A
Approvals				
Insulation Material / Material Group	Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	6 KV / 3			
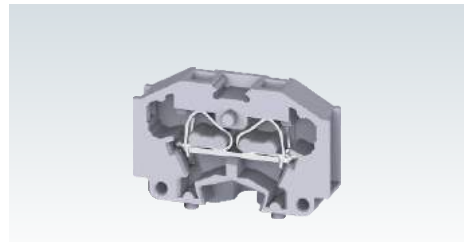
## CM1.5S



		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CM1.5S	100
	Blue	CM1.5SBU	100
	Red	CM1.5SR	100
	Yellow	CM1.5SY	100
	Black	CM1.5SBK	100
	Green	CM1.5SGN	100
	Orange	CM1.5SO	100
	Yellow-Green	CM1.5SYG	100
End Plate		EPCM1.5S	50
Marking Tags (Refer Pg. 224 for details)		CA509/K4WHT	100
Screw Driver		SCM0.5/3	Blade size: 0.5 x 3 mm 10

CM1.5S2



8 x 26.5 mm

18 mm (Panel Mount)

IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.2 - 2.5 mm <sup>2</sup>	
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
0.2 - 0.5 mm <sup>2</sup>	24 - 20 AWG

8 mm


IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
500 V	300 V	300 V	320 V
17 A	10 A	10 A	15 A



Polyamide 6,6 / 1

6 KV / 3

CM2.5S



6 x 30 mm

20 mm (Panel Mount)

IEC	UL - CSA
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 4.0 mm <sup>2</sup>	
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 1.5 mm <sup>2</sup>	22 - 16 AWG

8 mm


IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
500 V	300 V	300 V	320 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1

6 KV / 3

CM2.5S2



10 x 30 mm

20 mm (Panel Mount)

IEC	UL - CSA
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 4.0 mm <sup>2</sup>	
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 1.5 mm <sup>2</sup>	22 - 16 AWG

8 mm

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
500 V	300 V	300 V	320 V
24 A	20 A	20 A	21 A




Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CM1.5S2	100
CM1.5S2BU	100
CM1.5S2R	100
CM1.5S2Y	100
CM1.5S2BK	100
CM1.5S2GN	100
CM1.5S2O	100
CM1.5S2YG	100
EPCM1.5S	50
CA509/K7.5WHT	100
SCM0.5/3	Blade size: 0.5 x 3 mm / 10


Type / Cat. No.	Standard Pack
CM2.5S	100
CM2.5SBU	100
CM2.5SR	100
CM2.5SY	100
CM2.5SBK	100
CM2.5SGN	100
CM2.5SO	100
CM2.5SYG	100
EPCM2.5S	50
CA509/K2WHT	100
SCM0.5/3	Blade size: 0.5 x 3 mm / 10

Type / Cat. No.	Standard Pack
CM2.5S2	100
CM2.5S2BU	100
CM2.5S2R	100
CM2.5S2Y	100
CM2.5S2BK	100
CM2.5S2GN	100
CM2.5S2O	100
CM2.5S2YG	100
EPCM2.5S	50
CA509/K7.5WHT	100
SCM0.5/3	Blade size: 0.5 x 3 mm / 10

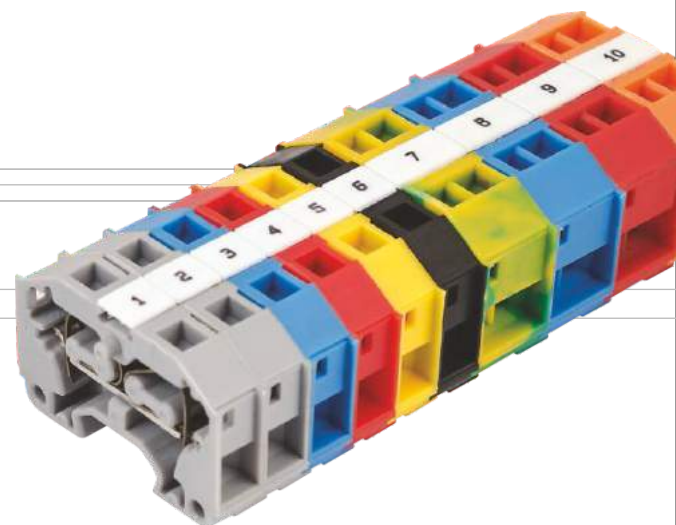


# PANEL MOUNT TERMINAL BLOCKS

## CM4S




## CM4S2




Width (Thickness) x Length	7 x 33.7 mm			12 x 33.7 mm		
Height	23 mm (Panel Mount)			23 mm (Panel Mount)		
Connection Possibility as per	IEC	UL - CSA		IEC	UL - CSA	
		Stranded / Flexible	24 - 10 AWG		0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
With 1 Conductor per clamp	0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG		0.2 - 6.0 mm <sup>2</sup>	24 - 10 AWG	
		with Ferrule / Lug	24 - 10 AWG		0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
With 2 same size Conductors per clamp	0.2 - 1.5 mm <sup>2</sup>	24 - 18 AWG		0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
		with TWIN Ferrule / Lug	24 - 18 AWG		0.2 - 1.5 mm <sup>2</sup>	24 - 18 AWG
Wire Stripping Length	10 mm			10 mm		
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	630 V	300 V	300 V	630 V	300 V	300 V
Current	32 A	26 A	26 A	32 A	26 A	26 A
Approvals						
Insulation Material / Comparative Tracking Index	Polyamide 66 / 1			Polyamide 66 / 1		
Rated Impulse Voltage / Pollution Degree	6 KV / 3			6 KV / 3		

	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CM4S	100	CM4S2	100
	Blue	CM4SBU	100	CM4S2BU	100
	Red	CM4SR	100	CM4S2R	100
	Yellow	CM4SY	100	CM4S2Y	100
	Black	CM4SBK	100	CM4S2BK	100
	Green	CM4SGN	100	CM4S2GN	100
	Orange	CM4SO	100	CM4S2O	100
	Yellow-Green	CM4SYG	100	CM4S2YG	100
	End Plate	EPCM4S	50	EPCM4S	50
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100	CA509/K12WHT	100	
Screw Driver	SCM0.6/3.5 Blade size: 0.6 x 3.5 mm	10	SCM0.6/3.5 Blade size: 0.6 x 3.5 mm	10	
Actuator for actuating the Spring Clamp					
Insulated External Shorting Link (2 pole)					
End Clamp (Refer Pg. 220 for details)					
Mounting Rail (Refer Pg. 219 for details)					

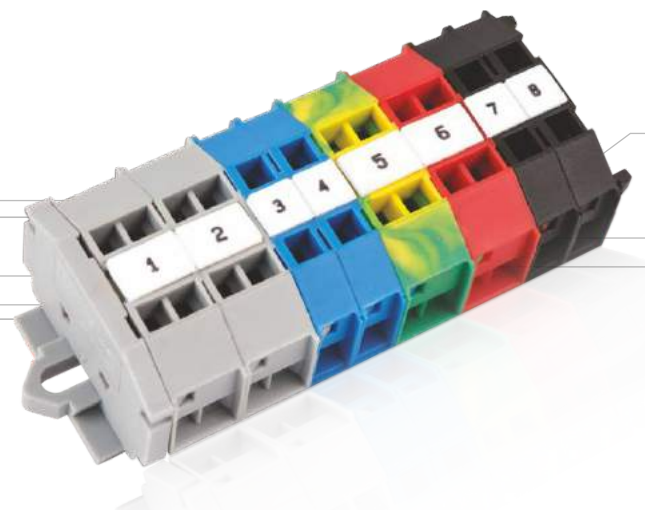

### CSCP2.5T



5 x 35 mm

27.3 (Panel Mount)

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG

0.2 - 1.5 mm<sup>2</sup> 22 - 16 AWG

11 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7


800 V	600 V	600 V	500 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1

8 KV / 3

### CSCP2.5T2



10 x 35 mm

27.3 (Panel Mount)

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG

0.2 - 1.5 mm<sup>2</sup> 22 - 16 AWG

11 mm

IEC60947-7-1 UL-1059 CSA22.2-158 IEC 60079-7


800 V	600 V	600 V	500 V
24 A	20 A	20 A	21 A



Polyamide 6,6 / 1

8 KV / 3

### CXCP2.5/4



10 x 38 mm

36.5 mm / 44 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG
0.2 - 4.0 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG

0.2 - 1.5 mm<sup>2</sup> 22 - 16 AWG

10 mm

IEC60947-7-1 UL-1059 CSA22.2-158

1000 V	600 V	600 V
24 A	20 A	20 A



Polyamide 66 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CSCP2.5T	100
CSCP2.5TBU	100
CSCP2.5TR	100
CSCP2.5TY	100
CSCP2.5TBK	100
CSCP2.5TGN	100
EPCSCP2.5T	50
CA509/K4WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10
SCA2.5	1
CA803/1 I <sub>max.</sub> : 24 A	100


Type / Cat. No.	Standard Pack
CSCP2.5T2	50
CSCP2.5T2BU	50
CSCP2.5T2R	50
CSCP2.5T2Y	50
CSCP2.5T2BK	50
CSCP2.5T2GN	50
EPCSCP2.5T	50
CA509/K3WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10
SCA2.5	1

Type / Cat. No.	Standard Pack
CXCP2.5/4	50
EPCXCP2.5/4	50
CA509/K3WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10
SCA2.5	1
CA803/1 I <sub>max.</sub> : 24 A	100
CA103 / CA104	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m




# CP SERIES PUSH-IN TERMINAL BLOCKS

CP series Push-In Terminal Blocks have a specialized connection system that enables tool less wire connections. Reliable, vibration resistant, gas tight connections are made with in built high quality stainless steel Push-In springclamps.

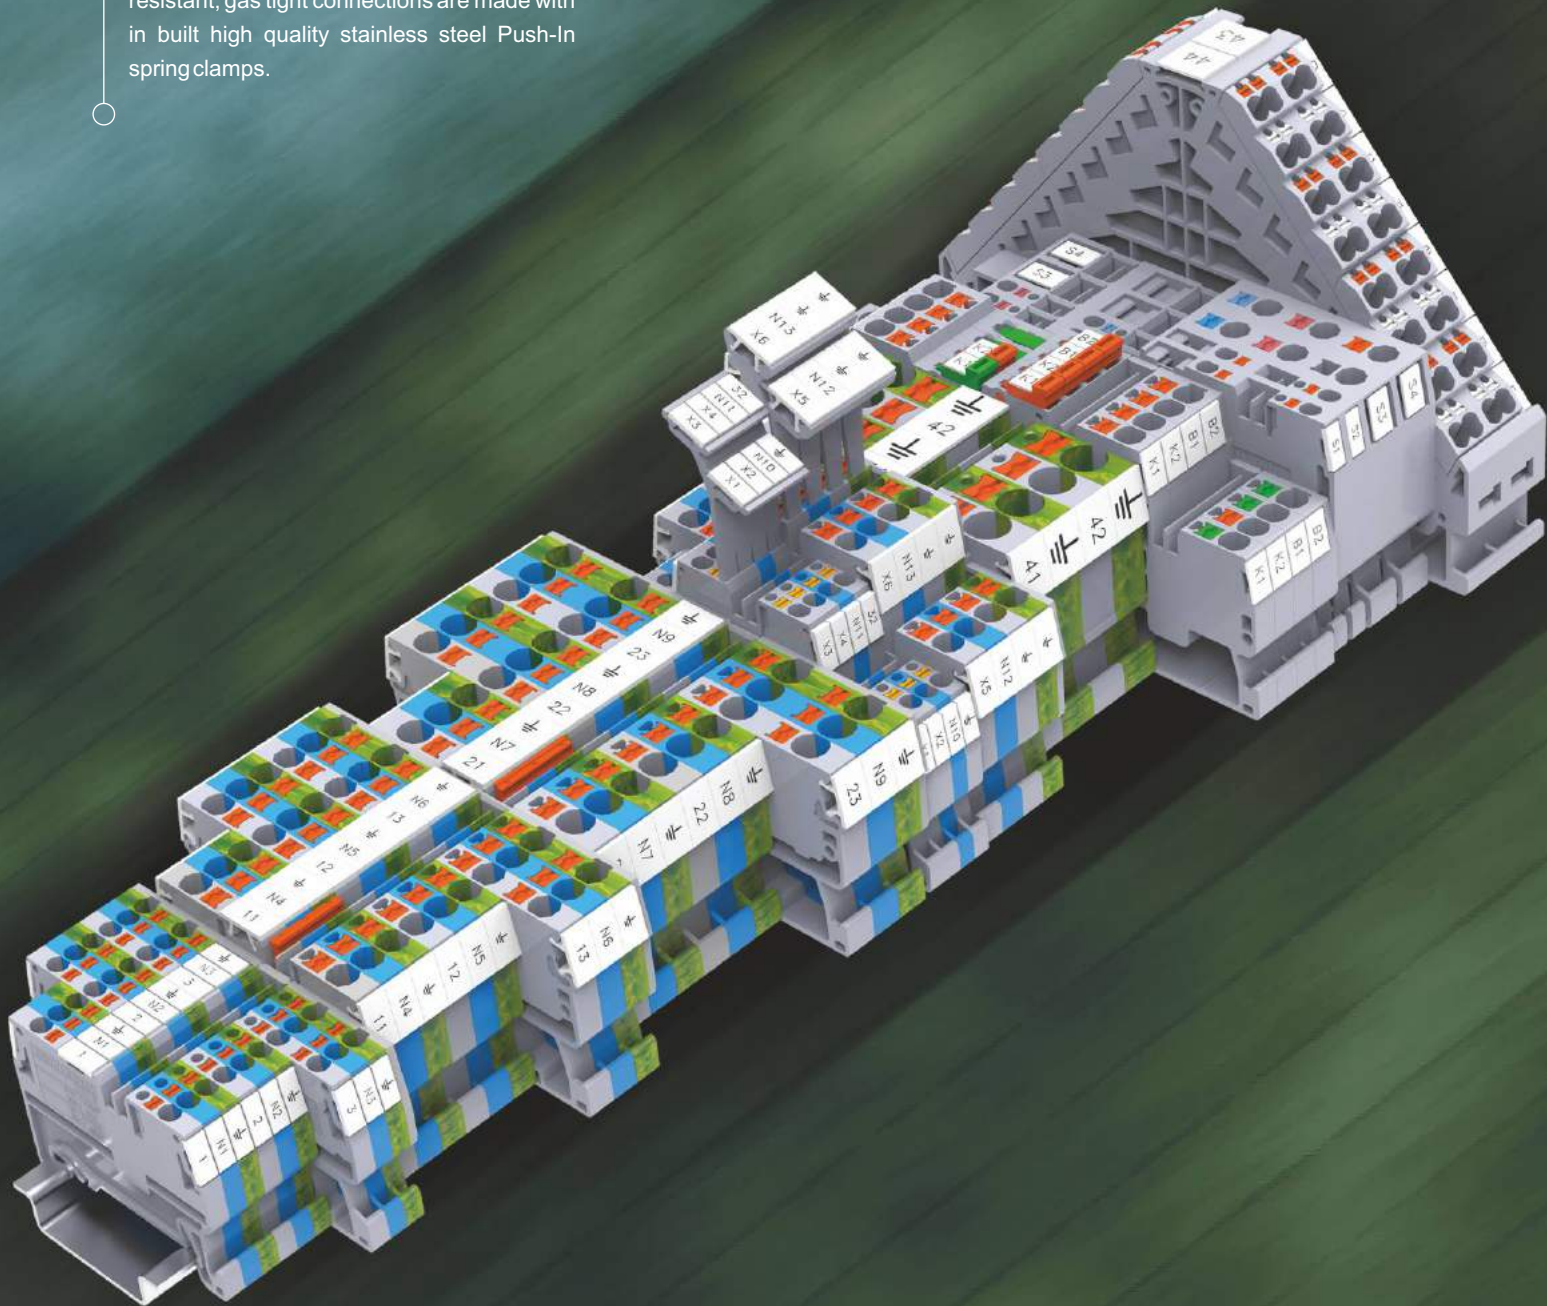


## CP SERIES PUSH-IN TERMINAL BLOCKS




**Feed Through**

**147 - 148**




**Multiple Connection**

**149 - 152**



**Ground / Earth**

**153 - 157**




**Double Level**

**158 - 161**




**Multiple Level**

**162 - 164**




**Disconnect**

**165 - 166**




**Sensor & Actuator**

**167 - 168**



**Marshalling**


**169 - 170**

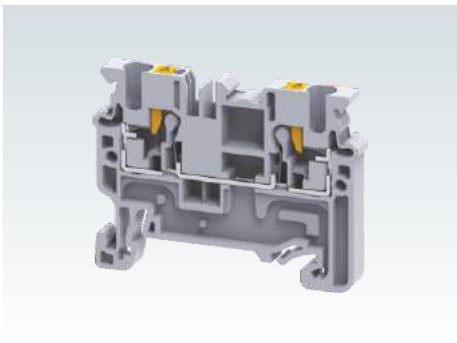


CP series Push-In Terminal Blocks have a specialized connection system that enables tool less wire connections. Reliable, vibration resistant, gas tight connections are made with in built high quality stainless steel Push-In spring clamps.




Solid wires and wires with crimped lugs / ferrules are simply pushed into the connection point. No special tools or screwdrivers are required for making such connections. The connection spring is actuated with minimum insertion force.

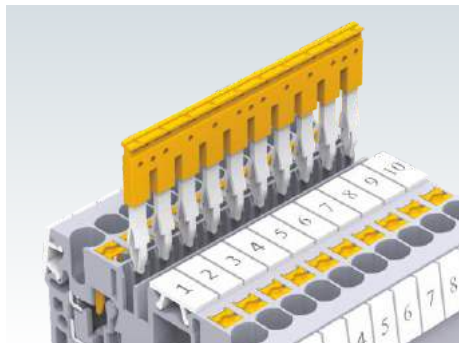

Standardized jumpers for shorting Terminal Blocks are now available in various pole configurations.

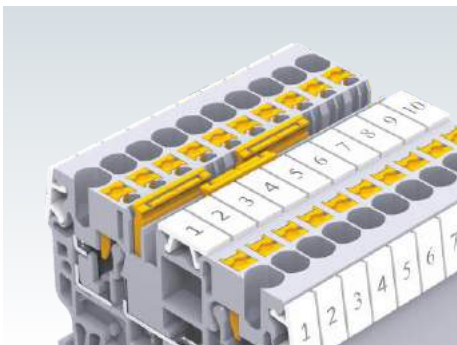


The possibility of using 2 independent rows for bridging enables the creation of various circuit combinations. Jumpers can be marked with a felt tip pen on the recess provided on top, to clearly indicate shorted positions.

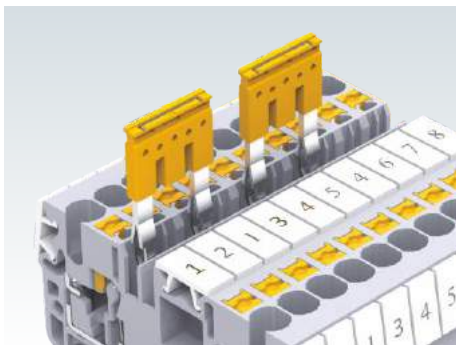

Individual Terminal Blocks in an assembly can be skipped from getting shorted with the adjacent terminal. This is achieved by breaking intermediate contacts from the standard shorting link.



Step down jumpers facilitate shorting of different wire size terminals. This helps in building distribution circuits easily.

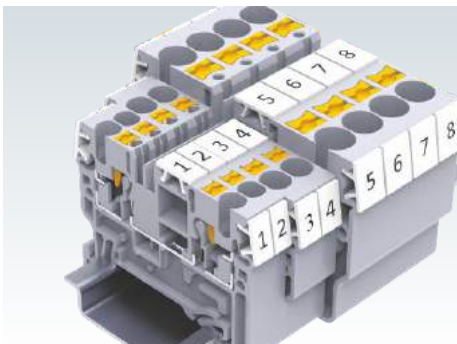


High quality stainless steel Push-In springs, provide a gas tight connection. A vibration proof, anti-loosening wire connection is achieved with this pre-stressed Push-In spring clamp system.




The jumper and marking tag position is aligned across different types of CP series Terminal Blocks. This facilitates shorting and marking adjacent terminals with different functionalities.




Ground Terminal Blocks have specially designed alloy feet which snap on to the DIN rail. They are green-yellow colour coded as per industry norms.

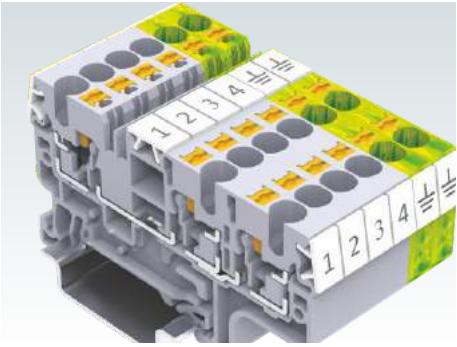


Multi connection Terminal Blocks are used for applications involving more than one same potential wires to be connected.

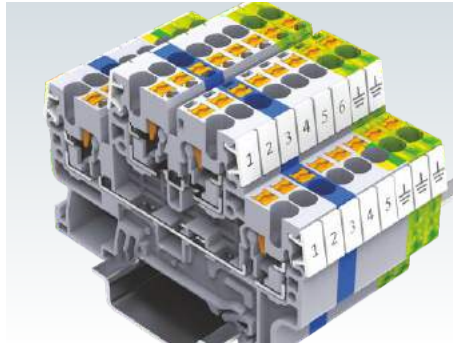


Double level Terminal Blocks enable high density wiring. Each level can be independently shorted to suit various applications.

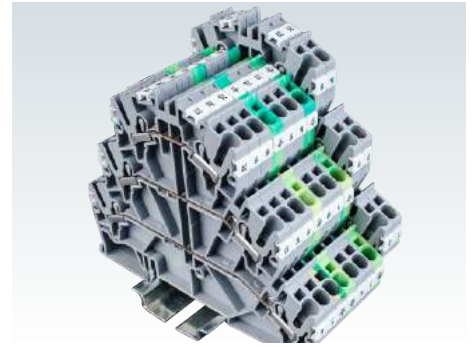


Multi level Terminal Blocks are ideal choice for control systems. Two Level plus ground and three level plus ground terminals facilitate single & three phase connections.

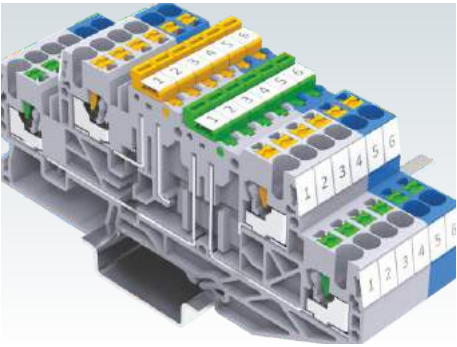

Knife type disconnecting Terminal Blocks are available for applications in process control industries. The circuit on individual levels can be easily disconnected by lifting the disconnection lever.

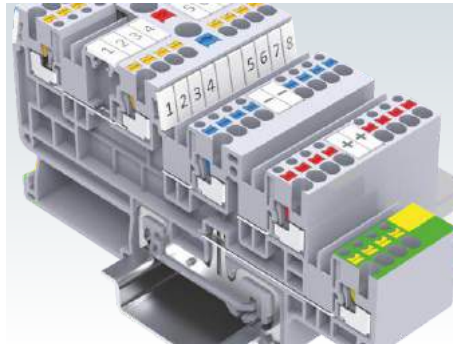

Sensors and actuator Terminal Blocks are ideal for wiring machine control systems. These Terminal Blocks are extremely compact with a terminal thickness of as low as 3.5mm

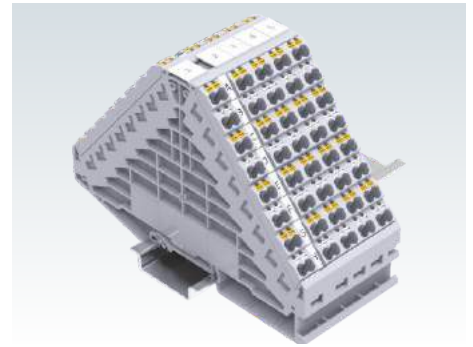

8 Level Terminal Blocks are space saving method for potential and signal distribution. Push-In connection technology facilitates extremely high density wiring. This is an ideal choice for high density marshalling cabinets.



# FEED THROUGH TERMINAL BLOCKS


CP series Push-In type Terminal Blocks are the next generation, compact terminals. These series of Terminal Blocks have 1000 V rating as per IEC guidelines. The new CP series terminals have a much wider range for wire terminations.

The wire is held directly against the copper current bar by pre stressed clamps.

The Push button on the top is to be pressed for using flexible cable without lug for connection. Lugged cable can be directly pressed into clamp to make connections.

Cross connection of these Terminal Blocks can be done using insulated Push-In jumpers available in various pole configurations.

## CP1.5



Width (Thickness) x Length	3.5 x 45.3 mm																	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	32.8 mm / 40.3 mm																	
Connection Possibility as per	<table border="1"> <thead> <tr> <th>IEC</th> <th colspan="2">UL - CSA</th> </tr> </thead> <tbody> <tr> <td>With 1 Conductor per clamp</td> <td>Stranded / Flexible</td> <td>0.2 - 1.5 mm<sup>2</sup></td> <td>24 - 14 AWG</td> </tr> <tr> <td></td> <td>Solid</td> <td>0.2 - 2.5 mm<sup>2</sup></td> <td>24 - 12 AWG</td> </tr> <tr> <td></td> <td>with Ferrule / Lug</td> <td>0.2 - 1.5 mm<sup>2</sup></td> <td>24 - 16 AWG</td> </tr> </tbody> </table>			IEC	UL - CSA		With 1 Conductor per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG		Solid	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG		with Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
IEC	UL - CSA																	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG															
	Solid	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG															
	with Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG															
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug																	
Wire Stripping Length	8 mm																	
Ratings As Per	IEC60947-7-1 UL-1059																	
Voltage	800 V	600 V																
Current	16 A	15 A																
Approval																		
Insulation Material / Material Group	Polyamide 6,6 / 1																	
Rated Impulse Voltage / Pollution Degree	8 KV / 3																	

	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CP1.5	100
	Blue	CP1.5BU	100
	Red	CP1.5R	100
	Yellow	CP1.5Y	100
	Black	CP1.5BK	100
	Green	CP1.5GN	100
	Orange	CP1.5O	100
	Ground / Earth	CPG1.5 (Refer Pg. 153 for details)	100

End Plate		EPCP1.5	50
Partition Plate		PPCX4	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)		MS3.5WHT	100
Screw Driver		SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
Shorting Links	2 pole	JX1.5/2	16 A	100
	3 pole	JX1.5/3	16 A	50
	4 pole	JX1.5/4	16 A	50
	5 pole			
	6 pole			
	7 pole			
8 pole				
10 pole	JX1.5/10	16 A	10	
Step Down Shorting Link			50	
			50	

Test Plug			
-----------	--	--	--



**CP2.5**



5 x 49.7 mm

38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm

IEC60947-7-1 UL-1059

1000 V	600 V		
24 A	20 A		



Polyamide 6,6 / 1

8 KV / 3

**CP4**



6 x 54.8 mm

38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG

0.5 - 1.0 mm<sup>2</sup> 20 - 18 AWG

10 mm

IEC60947-7-1 UL-1059


1000 V	600 V		
32 A	30 A		



Polyamide 6,6 / 1

8 KV / 3

**CP6/10**



8 x 62.75 mm

43 mm / 50.55 mm

IEC	UL - CSA
0.5 - 10.0 mm <sup>2</sup>	20 - 8 AWG
0.5 - 10.0 mm <sup>2</sup>	20 - 8 AWG
0.5 - 10.0 mm <sup>2</sup>	20 - 8 AWG

0.5 - 2.5 mm<sup>2</sup> 20 - 14 AWG

14 mm

IEC60947-7-1 UL-1059

1000 V	600 V		
57 A	40 A		



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CP2.5	100
CP2.5BU	100
CP2.5R	100
CP2.5Y	100
CP2.5BK	100
CP2.5GN	100
CP2.5O	100
CPG2.5 (Refer Pg. 154 for details)	100
EPCX2.5	50
PPCX4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Imax	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

Type / Cat. No.	Standard Pack
CP4	100
CP4BU	100
CP4R	100
CP4Y	100
CP4BK	100
CP4GN	100
CP4O	100
CPG4 (Refer Pg. 154 for details)	100
EPCX4	50
PPCX4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10


Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10


Type / Cat. No.	Standard Pack
CP6/10	100
CP6/10BU	100
CP6/10R	100
CP6/10Y	100
CP6/10BK	100
CP6/10GN	100
CP6/10O	100
CPG6/10 (Refer Pg. 154 for details)	100
EPCX6	50
PPCX10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	Imax	Standard Pack
JX6/2	41 A	100
JX6/3	41 A	50
JX6/4	41 A	50
JX6/10	41 A	10
JXS6/2.5	24 A	50
JXS6/4	32 A	50

# MULTIPLE CONNECTION TERMINAL BLOCKS


CP series multi connect 3 wire & 4 wire Push-In type Terminal Blocks are used to eliminate reliability problems encountered when there is a need to connect multiple wires in a single Terminal Block.

Width (Thickness) x Length	3.5 x 54.5 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	32.8 mm / 40.3 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
	Solid	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	with Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug		
Wire Stripping Length	8 mm		
Ratings As Per	IEC60947-7-1	UL-1059	
Voltage	800 V	600 V	
Current	16 A	15 A	
Approval			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

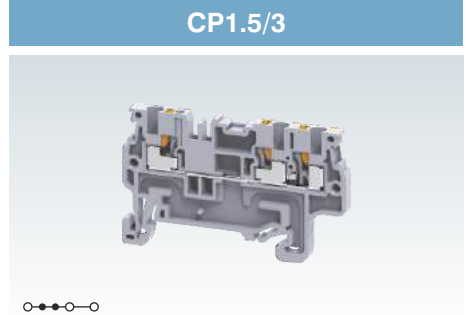


	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	CP1.5/3	100
	Blue	CP1.5/3BU	100
	Red	CP1.5/3R	100
	Yellow	CP1.5/3Y	100
	Black	CP1.5/3BK	100
	Green	CP1.5/3GN	100
	Orange	CP1.5/3O	100
	Ground / Earth	CPG1.5/3 (Refer Pg. 155 for details)	100
	End Plate	EPCP1.5/3	50
Partition Plate	PPCX4/3	50	
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m	
	CA701-15-1M / CA701-15-1M-S	25 m	
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50	
Marking Tags (Refer Pg. 224 for details)	MS3.5WHT	100	
Screw Driver	SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10	

	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
Shorting Links	2 pole	JX1.5/2	16 A	100
	3 pole	JX1.5/3	16 A	50
	4 pole	JX1.5/4	16 A	50
	5 pole			
	6 pole			
	7 pole			
	8 pole			
	10 pole	JX1.5/10	16 A	10
	Step Down Shorting Link			
	Test Plug			



### CP1.5/4



3.5 x 63.5 mm

32.8 mm / 40.3 mm

IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm

IEC60947-7-1 UL-1059


800 V	600 V		
16 A	15 A		



Polyamide 6,6 / 1

8 KV / 3

### CP2.5/3



5 x 62.5 mm

38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup>

22 AWG

10 mm

IEC60947-7-1 UL-1059


1000 V	600 V		
24 A	20 A		



Polyamide 6,6 / 1

8 KV / 3

### CP2.5/4



5 x 73 mm

38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup>

22 AWG

10 mm

IEC60947-7-1 UL-1059

1000 V	600 V		
24 A	20 A		



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CP1.5/4	100
CP1.5/4BU	100
CP1.5/4R	100
CP1.5/4Y	100
CP1.5/4BK	100
CP1.5/4GN	100
CP1.5/4O	100
CPG1.5/4 (Refer Pg. 155 for details)	100
EPCP1.5/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
MS3.5WHT	100
SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

Type / Cat. No.	Standard Pack
CP2.5/3	100
CP2.5/3BU	100
CP2.5/3R	100
CP2.5/3Y	100
CP2.5/3BK	100
CP2.5/3GN	100
CP2.5/3O	100
CPG2.5/3 (Refer Pg. 156 for details)	100
EPCX2.5/3	50
PPCX4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10


Type / Cat. No.	Standard Pack
CP2.5/4	100
CP2.5/4BU	100
CP2.5/4R	100
CP2.5/4Y	100
CP2.5/4BK	100
CP2.5/4GN	100
CP2.5/4O	100
CPG2.5/4 (Refer Pg. 156 for details)	100
EPCX2.5/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Imax	Standard Pack
JX1.5/2	16 A	100
JX1.5/3	16 A	50
JX1.5/4	16 A	50
JX1.5/10	16 A	10


Type / Cat. No.	Imax	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

Type / Cat. No.	Imax	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
JXS4/2.5	24 A	50
TX2.5		50

CP4/3

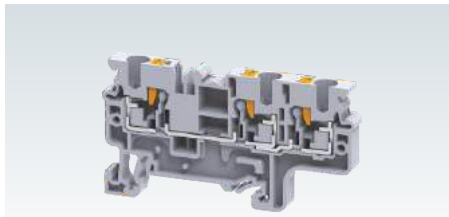

CP4/4

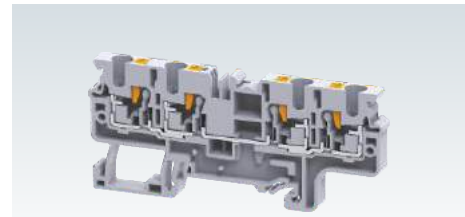

Width (Thickness) x Length	6 x 70.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38.25 mm / 45.75 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid	0.2 - 6.0 mm <sup>2</sup>
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.5 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	1000 V	600 V
Current	32 A	30 A
Approval	CE	
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

Width (Thickness) x Length	6 x 70.5 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38.25 mm / 45.75 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid	0.2 - 6.0 mm <sup>2</sup>
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.5 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	1000 V	600 V
Current	32 A	30 A
Approval	CE	
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

Width (Thickness) x Length	6 x 86.2 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	38.25 mm / 45.75 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid	0.2 - 6.0 mm <sup>2</sup>
	with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.5 - 1.0 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	1000 V	600 V
Current	32 A	30 A
Approval	CE	
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

Terminal Block	Grey	CP4/3	50
	Blue	CP4/3BU	50
	Red	CP4/3R	50
	Yellow	CP4/3Y	50
	Black	CP4/3BK	50
	Green	CP4/3GN	50
	Orange	CP4/3O	50
	Ground / Earth	CPG4/3 (Refer Pg. 156 for details)	50
End Plate		EPCX4/3	50
Partition Plate		PPCX4/3	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)		CA509/K6WHT	100
Screw Driver		SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Standard Pack
CP4/3	50
CP4/3BU	50
CP4/3R	50
CP4/3Y	50
CP4/3BK	50
CP4/3GN	50
CP4/3O	50
CPG4/3 (Refer Pg. 156 for details)	50
EPCX4/3	50
PPCX4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10


Type / Cat. No.	Standard Pack
CP4/4	50
CP4/4BU	50
CP4/4R	50
CP4/4Y	50
CP4/4BK	50
CP4/4GN	50
CP4/4O	50
CPG4/4 (Refer Pg. 157 for details)	50
EPCX4/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Shorting Links	Type / Cat. No.	Imax	Standard Pack
	2 pole	JX4/2	32 A
	3 pole	JX4/3	32 A
	4 pole	JX4/4	32 A
	5 pole		
	6 pole		
	7 pole		
	8 pole	JX4/8	32 A
	10 pole	JX4/10	32 A
	Step Down Shorting Link	JXS4/2.5	24 A

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS4/2.5	24 A	50

Type / Cat. No.	Imax	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS4/2.5	24 A	50

## CP6/10/3



8 x 82.85 mm

43 mm / 50.55 mm

IEC	UL - CSA
0.5 - 10.0 mm <sup>2</sup>	20 - 8 AWG
0.5 - 10.0 mm <sup>2</sup>	20 - 8 AWG
0.5 - 2.5 mm <sup>2</sup>	20 - 14 AWG

14 mm

IEC60947-7-1 UL-1059

1000 V	600 V		
57 A	40 A		



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CP6/10/3	50
CP6/10/3BU	50
CP6/10/3R	50
CP6/10/3Y	50
CP6/10/3BK	50
CP6/10/3GN	50
CP6/10/3O	50
CPG6/10/3 (Refer Pg. 157 for details)	50
EPCX6/3	50

CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10








Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX6/2	41 A	100
JX6/3	41 A	50
JX6/4	41 A	50
JX6/10	41 A	10
JXS6/2.5	24 A	50
JXS6/4	32 A	50



# GROUND / EARTH TERMINAL BLOCKS

CPG series are compact Push-In type earthing Terminal Blocks with specially designed alloy feet which help in achieving very low contact resistance and vibration proof grounding with the DIN rails. They are Green-Yellow colour coded as per industry standards.


Cross connection of these Terminal Blocks can be done using insulated Push-In links.

Multi connect 3 wire & 4 wire terminals eliminate reliability problems encountered when there is a need to connect multiple wires in a single Terminal Block.

<b>Width (Thickness) x Length</b>		3.5 x 45.3 mm			
<b>Height with DIN 35 x 7.5 / 35 x 15 mm Rail</b>		32.8 mm / 40.3 mm			
<b>Connection Possibility as per</b>		<b>IEC</b>	<b>UL - CSA</b>		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG		
	Solid with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG		
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG		
<b>Wire Stripping Length</b>		8 mm			
<b>Approval</b>					
<b>Insulation Material / Material Group</b>		Polyamide 6,6 / 1			
<b>Rated Impulse Voltage / Pollution Degree</b>		8 KV / 3			
		<b>Type / Cat. No.</b>	<b>Standard Pack</b>		
Terminal Block		CPG1.5	100		
End Plate 		EPCP1.5	50		
Partition Plate 		PPCX4	50		
Mounting Rail (Refer Pg. 219 for details) 		CA701-1M / CA701-1M-S	50 m		
End Clamp (Refer Pg. 220 for details) 		CA701-15-1M / CA701-15-1M-S	25 m		
Marking Tags (Refer Pg. 224 for details) 		CA103 / CA104	50		
Screw Driver 		MS3.5	100		
		SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10		
<b>Shorting Links</b>		<b>Type / Cat. No.</b>	<b>I<sub>max</sub></b>		
			<b>Standard Pack</b>		
		2 pole	JX1.5/2	16 A	100
		3 pole	JX1.5/3	16 A	50
		4 pole	JX1.5/4	16 A	50
		5 pole			
		6 pole			
		7 pole			
		8 pole			
		10 pole	JX1.5/10	16 A	10
Step Down Shorting Link					
Test Plug					

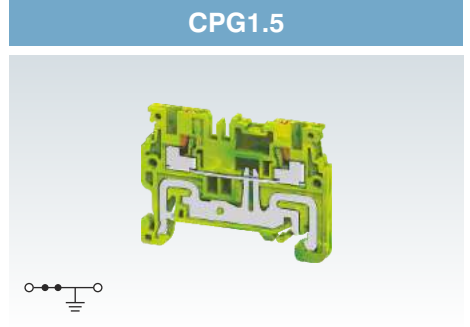

**CPG2.5**



5 x 49.7 mm

38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
CPG2.5	100
EPCX2.5	50
PPCX4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

TX2.5 50

**CPG4**



6 x 54.8 mm

38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG

0.5 - 1.0 mm<sup>2</sup> 20 - 18 AWG

10 mm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CPG4	100
EPCX4	50
PPCX4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS4/2.5	24 A	50

**CPG6/10**



8 x 62.75 mm

43 mm / 50.55 mm

IEC	UL - CSA
0.5 - 10.0 mm <sup>2</sup>	20 - 8 AWG
0.5 - 10.0 mm <sup>2</sup>	20 - 8 AWG

0.5 - 2.5 mm<sup>2</sup> 20 - 14 AWG

14 mm



Polyamide 6,6 / 1


8 KV / 3

Type / Cat. No.	Standard Pack
CPG6/10	100
EPCX6	50
PPCX10	20
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K8WHT	100
SCM0.8/4 Blade size: 0.8 x 4 mm	10


Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX6/2	41 A	100
JX6/3	41 A	50
JX6/4	41 A	50
JX6/10	41 A	10
JXS6/2.5	24 A	50
JXS6/4	32 A	50



CPG1.5/3

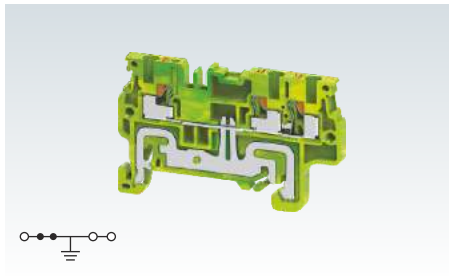

CPG1.5/4

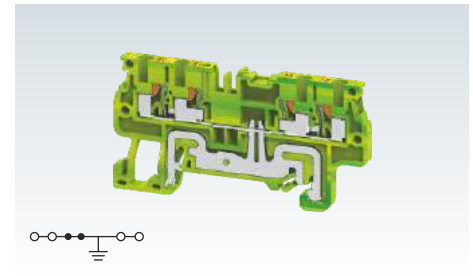

Width (Thickness) x Length	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	
Connection Possibility as per	
With 1 Conductor per clamp	Stranded / Flexible
	Solid with Ferrule / Lug
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug
Wire Stripping Length	
Approval	
Insulation Material / Material Group	
Rated Impulse Voltage / Pollution Degree	

3.5 x 54.5 mm	
32.8 mm / 40.3 mm	
IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
8 mm	
CE	
Polyamide 6,6 / 1	
8 KV / 3	

3.5 x 63.5 mm	
32.8 mm / 40.3 mm	
IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
8 mm	
CE	
Polyamide 6,6 / 1	
8 KV / 3	

Terminal Block	CPG1.5/3	100
End Plate	EPCP1.5/3	50
Partition Plate	PPCX4/3	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)	MS3.5WHT	100
Screw Driver	SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

Type / Cat. No.	Standard Pack
CPG1.5/3	100
EPCP1.5/3	50
PPCX4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
MS3.5WHT	100
SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10



Type / Cat. No.	Standard Pack
CPG1.5/4	100
EPCP1.5/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
MS3.5WHT	100
SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

Shorting Links		
	2 pole	
	3 pole	
	4 pole	
	5 pole	
	6 pole	
	7 pole	
	8 pole	
	10 pole	
	Step Down Shorting Link	
	Test Plug	

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX1.5/2	16 A	100
JX1.5/3	16 A	50
JX1.5/4	16 A	50
JX1.5/10	16 A	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX1.5/2	16 A	100
JX1.5/3	16 A	50
JX1.5/4	16 A	50
JX1.5/10	16 A	10

**CPG2.5/3**



5 x 62.5 mm  
38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm



Polyamide 6,6 / 1



8 KV / 3

Type / Cat. No.	Standard Pack
CPG2.5/3	100
EPCX2.5/3	50
PPCX4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

TX2.5 50

**CPG2.5/4**



5 x 73 mm  
38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm



Polyamide 6,6 / 1



8 KV / 3

Type / Cat. No.	Standard Pack
CPG2.5/4	100
EPCX2.5/4	50
PPCX4/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

TX2.5 50

**CPG4/3**



6 x 70.5 mm  
38.25 mm / 45.75 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG

0.5 - 1.0 mm<sup>2</sup> 20 - 18 AWG

10 mm




Polyamide 6,6 / 1

8 KV / 3


Type / Cat. No.	Standard Pack
CPG4/3	50
EPCX4/3	50
PPCX4/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K6WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX4/2	32 A	100
JX4/3	32 A	50
JX4/4	32 A	50
JX4/8	32 A	10
JX4/10	32 A	10
JXS4/2.5		50

CPG4/4

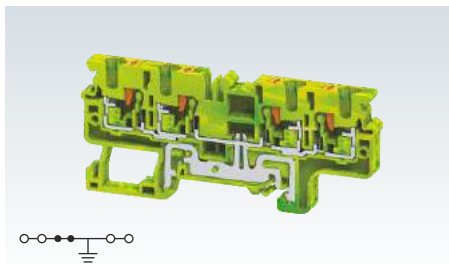

CPG6/10/3

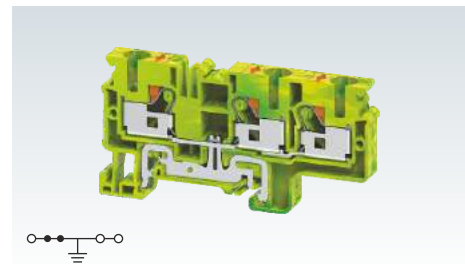

Width (Thickness) x Length		6 x 86.2 mm
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		38.25 mm / 45.75 mm
Connection Possibility as per		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
Wire Stripping Length		10 mm
Approval		
Insulation Material / Material Group		Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree		8 KV / 3

Width (Thickness) x Length		8 x 82.85 mm
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		43 mm / 50.55 mm
Connection Possibility as per		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
Wire Stripping Length		10 mm
Approval		
Insulation Material / Material Group		Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree		8 KV / 3

Width (Thickness) x Length		8 x 82.85 mm
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		43 mm / 50.55 mm
Connection Possibility as per		
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>
Wire Stripping Length		10 mm
Approval		
Insulation Material / Material Group		Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree		8 KV / 3

Type / Cat. No.		Standard Pack
Terminal Block	CPG4/4	50
End Plate	EPCX4/4	50
Partition Plate	PPCX4/4	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)	CA509/K6WHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.		Standard Pack
Terminal Block	CPG6/10/3	50
End Plate	EPCX6/3	50
Partition Plate	PPCX4/4	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)	CA509/K8WHT	100
Screw Driver	SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.		Standard Pack
Terminal Block	CPG6/10/3	50
End Plate	EPCX6/3	50
Partition Plate	PPCX4/4	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)	CA509/K8WHT	100
Screw Driver	SCM0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.		I <sub>max</sub>	Standard Pack	
Shorting Links	2 pole	32 A	100	
	3 pole	32 A	50	
	4 pole	32 A	50	
	5 pole			
	6 pole			
	7 pole			
	8 pole	32 A	10	
	10 pole	32 A	10	
	Step Down Shorting Link	JXS4/2.5	24 A	50

Type / Cat. No.		I <sub>max</sub>	Standard Pack	
Shorting Links	2 pole	41 A	100	
	3 pole	41 A	50	
	4 pole	41 A	50	
	5 pole			
	6 pole			
	7 pole			
	8 pole	41 A	10	
	10 pole	41 A	10	
	Step Down Shorting Link	JXS6/2.5	24 A	50
		JXS6/4	32 A	50

Type / Cat. No.		I <sub>max</sub>	Standard Pack	
Shorting Links	2 pole	41 A	100	
	3 pole	41 A	50	
	4 pole	41 A	50	
	5 pole			
	6 pole			
	7 pole			
	8 pole	41 A	10	
	10 pole	41 A	10	
	Step Down Shorting Link	JXS6/2.5	24 A	50
		JXS6/4	32 A	50

# DOUBLE LEVEL TERMINAL BLOCKS


CPDL1.5 & CPDL2.5 are compact double level Push-In type Terminal Block. These Terminal Blocks are used in high density wiring applications. Interconnections / shorting is possible at both levels.

CPDL1.5(I.S) & CPDL2.5(I.S) are double level internally shorted Terminal Blocks. These are ideal choice for distribution application.

CPDLG1.5 & CPDLG2.5 are double level Push-In Terminal Blocks with an additional grounding point for terminating grounding cables on the lower level of the terminal block. The earth connection is made by snapping the terminal on the Din rail. This separate connection point is appropriately identified by the green-yellow imprint on its top.

CPDLG1.5(I.S) & CPDLG2.5(I.S) are double level ground Terminal Blocks with 4 connection points for grounding wires. It is available in a standard green-yellow colour to indicate the grounding connection.

## CPDL1.5

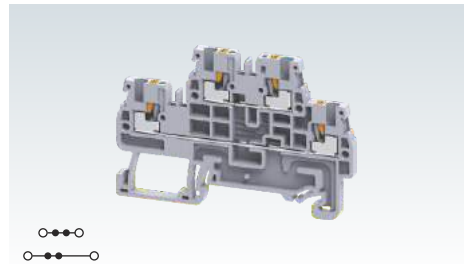

Width (Thickness) x Length	3.5 x 67.2 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	45.3 mm / 52.8 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
	Solid	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	with Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug		
Wire Stripping Length	8 mm		
Ratings As Per	IEC60947-7-1 UL-1059		
Voltage	800 V	600 V	
Current	16 A	15 A	
Approval			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		


		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CPDL1.5	100
	Blue	CPDL1.5BU	100
	Red	CPDL1.5R	100
	Yellow	CPDL1.5Y	100
	Black	CPDL1.5BK	100
	Green	CPDL1.5GN	100
	Orange	CPDL1.5O	100
	Ground / Earth	CPDLG1.5 (Refer Pg. 159 for details)	100
End Plate		EPCPDL1.5	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)		MS3.5WHT	100
Tree Marker		TM3.5	50
Screw Driver		SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

		Type / Cat. No.	I <sub>max</sub>	Standard Pack
Shorting Links	2 pole	JX1.5/2	16 A	100
	3 pole	JX1.5/3	16 A	50
	4 pole	JX1.5/4	16 A	50
	5 pole			
	6 pole			
	7 pole			
8 pole				
10 pole	JX1.5/10	16 A	10	





**CPDLG1.5(I.S)**



3.5 x 67.2 mm

45.3 mm / 52.8 mm

IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CPDLG1.5(I.S)	100
EPCPDL1.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
MS3.5WHT	100
TM3.5	50
SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX1.5/2	16 A	100
JX1.5/3	16 A	50
JX1.5/4	16 A	50
JX1.5/10	16 A	10

**CPDL2.5**



5 x 72.7 mm

49.55 mm / 57 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup>

22 AWG

10 mm

IEC60947-7-1 UL-1059

1000 V

600 V

24 A

20 A




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CPDL2.5	50
CPDL2.5BU	50
CPDL2.5R	50
CPDL2.5Y	50
CPDL2.5BK	50
CPDL2.5GN	50
CPDL2.5O	50
CPDLG2.5(I.S.) (Refer Pg. 161 for details)	50
EPCXDL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
TM5	50
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

**CPDL2.5(I.S)**

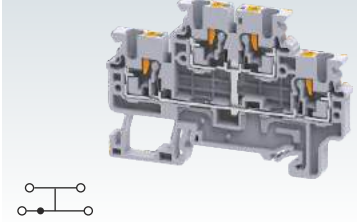

5 x 72.7 mm

49.55 mm / 57 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup>

22 AWG

10 mm

IEC60947-7-1 UL-1059

1000 V

600 V

24 A

20 A




Polyamide 6,6 / 1

8 KV / 3


Type / Cat. No.	Standard Pack
CPDL2.5(I.S)	50
EPCXDL2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
CA509/K5WHT	100
TM5	50
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10
TX2.5		50

CPDLG2.5

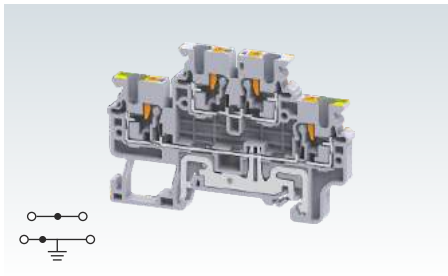

CPDLG2.5(I.S)

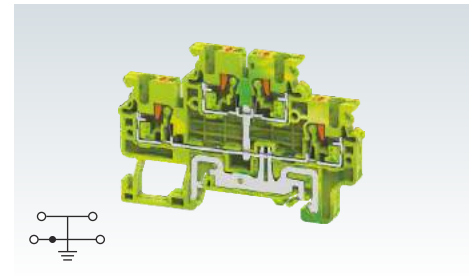

Width (Thickness) x Length	5 x 72.7 mm		5 x 72.7 mm			
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	49.55 mm / 57 mm		49.55 mm / 57 mm			
Connection Possibility as per	IEC	UL - CSA	IEC	UL - CSA		
		With 1 Conductor per clamp		Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
		Solid		0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG	
		with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG		
With 2 same size Conductors per clamp		with TWIN Ferrule / Lug	0.5 mm <sup>2</sup>	22 AWG		
Wire Stripping Length	10 mm		10 mm			
Ratings As Per	IEC60947-7-1 UL-1059					
Voltage	1000 V	600 V				
	Current	24 A	20 A			
Approval	CE		CE			
Insulation Material / Material Group	Polyamide 6,6 / 1		Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3		8 KV / 3			

		Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	Grey	CPDLG2.5	50	CPDLG2.5(I.S)	50
	Blue				
	Red				
	Yellow				
	Black				
	Green				
	Orange				
Ground / Earth					
End Plate		EPCXDL2.5	50	EPCXDL2.5	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S	50 m	CA701-1M / CA701-1M-S	50 m
		CA701-15-1M / CA701-15-1M-S	25 m	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA103 / CA104	50	CA103 / CA104	50
Marking Tags (Refer Pg. 224 for details)		CA509/K5WHT	100	CA509/K5WHT	100
Tree Marker		TM5	50	TM5	50
Screw Driver		SCM0.5/3 Blade size: 0.5 x 3 mm	10	SCM0.5/3 Blade size: 0.5 x 3 mm	10

		Type / Cat. No.	I <sub>max</sub>	Standard Pack	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
Shorting Links	2 pole	JX2.5/2	24 A	100	JX2.5/2	24 A	100	
	3 pole	JX2.5/3	24 A	50	JX2.5/3	24 A	50	
	4 pole	JX2.5/4	24 A	50	JX2.5/4	24 A	50	
	5 pole	JX2.5/5	24 A	50	JX2.5/5	24 A	50	
	6 pole	JX2.5/6	24 A	10	JX2.5/6	24 A	10	
	7 pole	JX2.5/7	24 A	10	JX2.5/7	24 A	10	
	8 pole	JX2.5/8	24 A	10	JX2.5/8	24 A	10	
	10 pole	JX2.5/10	24 A	10	JX2.5/10	24 A	10	
	Test Plug		TX2.5		50	TX2.5		50

# MULTIPLE LEVEL TERMINAL BLOCKS


CP3L2.5 is three level feed through Terminal Block. This is a practical solution for creating high density wiring circuits.

CP3L2.5(I.S) is a three level internally shorted version and is an ideal choice for distribution circuits.

CP3LG2.5 is 3 level feed through Terminal Block with a grounding feet on the fourth level. This is suitable for three phase wire connection applications.

In CP3LG2.5(I.S) all four levels are internally shorted to the ground contact.

## CP3L2.5

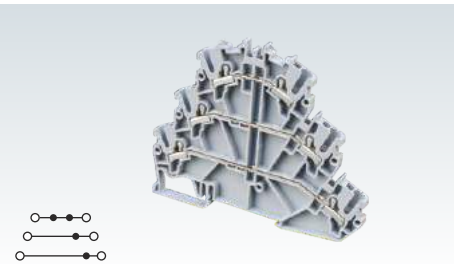


Width (Thickness) x Length	5 x 98.70 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	83.10 mm / 90.60 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
	Solid with Ferrule / Lug	0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp with TWIN Ferrule / Lug		0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	10 mm		
Ratings As Per	IEC60947-7-1	UL-1059	
Voltage	500 V	300 V	
Current	24 A	20 A	
Approvals			
Insulation Material / Comparative Tracking Index	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	6 KV / 3		

	Type / Cat. No.	Standard Pack
Terminal Block	CP3L2.5	30
End Plate	EPCP3L2.5	30
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA202 / CA103	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2GWHT	100
Screw Driver	SCM0.5/3 Blade size: 0.5 x 3 mm	10


Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	24 A	100
	3 pole	24 A	100
	4 pole	24 A	100
	10 pole	24 A	10



CP3L2.5(I.S)

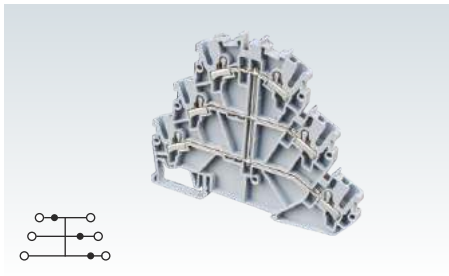

CP3LG2.5

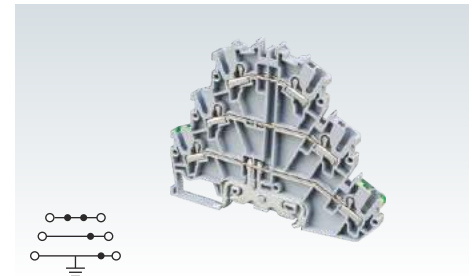

Width (Thickness) x Length	5 x 98.70 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	83.10 mm / 90.60 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.34 - 2.5 mm <sup>2</sup>
	Solid	0.34 - 4.0 mm <sup>2</sup>
	with Ferrule / Lug	0.34 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.34 - 0.5 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	500 V	300 V
Current	24 A	20 A
Approvals	CE	
Insulation Material / Comparative Tracking Index	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	6 KV / 3	

Width (Thickness) x Length	5 x 98.70 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	83.10 mm / 90.60 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.34 - 2.5 mm <sup>2</sup>
	Solid	0.34 - 4.0 mm <sup>2</sup>
	with Ferrule / Lug	0.34 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.34 - 0.5 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	500 V	300 V
Current	24 A	20 A
Approvals	CE	
Insulation Material / Comparative Tracking Index	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	6 KV / 3	

Width (Thickness) x Length	5 x 98.70 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	83.10 mm / 90.60 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	0.34 - 2.5 mm <sup>2</sup>
	Solid	0.34 - 4.0 mm <sup>2</sup>
	with Ferrule / Lug	0.34 - 2.5 mm <sup>2</sup>
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.34 - 0.5 mm <sup>2</sup>
Wire Stripping Length	10 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	500 V	300 V
Current	24 A	20 A
Approvals	CE	
Insulation Material / Comparative Tracking Index	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	6 KV / 3	

Terminal Block	
End Plate	
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Marking Tags (Refer Pg. 224 for details)	
Screw Driver	

Type / Cat. No.	Standard Pack
CP3L2.5(I.S)	30
EPCP3L2.5	30
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10



Type / Cat. No.	Standard Pack
CP3LG2.5	30
EPCP3L2.5	30
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack
	2 pole	CA801/A2	24 A
	3 pole	CA801/A3	24 A
	4 pole	CA801/A4	24 A
	10 pole	CA801/A10	24 A

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/A2	24 A	100
CA801/A3	24 A	100
CA801/A4	24 A	100
CA801/A10	24 A	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/A2	24 A	100
CA801/A3	24 A	100
CA801/A4	24 A	100
CA801/A10	24 A	10

### CP3LG2.5(I.S)



5 x 98.70 mm

83.10 mm / 90.60 mm

IEC	UL - CSA
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 0.5 mm <sup>2</sup>	22 - 20 AWG

10 mm




Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CP3LG2.5(I.S)	30
EPCP3L2.5	30
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/A2	24 A	100
CA801/A3	24 A	100
CA801/A4	24 A	100
CA801/A10	24 A	10

### CP4LG2.5



5 x 118.6 mm

93 mm / 100.50 mm

IEC	UL - CSA
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.34 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.34 - 0.5 mm <sup>2</sup>	22 - 20 AWG

10 mm

IEC60947-7-1 UL-1059

500 V

300 V

24 A

20 A



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CP4LG2.5	30
EPCP4LG2.5	30
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA202 / CA103	50
CA509/K2GWHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA801/A2	24 A	100
CA801/A3	24 A	100
CA801/A4	24 A	100
CA801/A10	24 A	10

# DISCONNECTING TERMINAL BLOCKS

CPDLK series terminals are double level disconnect Terminal Blocks.

In these Terminal Blocks disconnection is achieved by opening the insulated knife (blade) contact. The disconnecting knife is appropriately colour coded to ensure error free disconnection of the correct circuit.

CPDLK2.5 Terminal Blocks offer disconnection separately for both top and bottom levels.



CPDLK2.5(I.S) Terminal Block is internally shorted, offering single potential for all 4 connection points.

CPDLKFT2.5 is double level Terminal Block with a disconnecting lever on the top level and a feed through system on the bottom level.

CPDLKFT2.5(I.S) offer similar configuration with top and bottom level internally shorted.



Alternate and continuous bridging can be done with standard insulated Push-In jumpers.

## CPDLK2.5

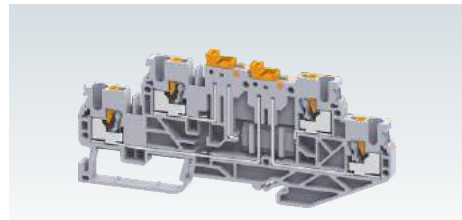


Width (Thickness) x Length	5 x 107.25 mm		
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	50 mm / 57.5 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	0.5 mm <sup>2</sup>	22 AWG
Wire Stripping Length	10 mm		
Ratings As Per	IEC60947-7-1	UL-1059	
Voltage	500 V	300 V	
Current	16 A	14 A	
Approval	CE		
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	6 KV / 3		

	Type / Cat. No.	Standard Pack		
Terminal Block	CPDLK2.5	100		
End Plate	EPCPDLK2.5	50		
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m		
	CA701-15-1M / CA701-15-1M-S	25 m		
End Clamp (Refer Pg. 220 for details)	CA103 / CA104	50		
Marking Tags (Refer Pg. 224 for details)	MS5WHT	100		
Marking Tags For Knife Contact	CA509/K4WHT	100		
Screw Driver	SCM0.5/3	Blade size: 0.5 x 3 mm		
		10		
Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack	
	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10

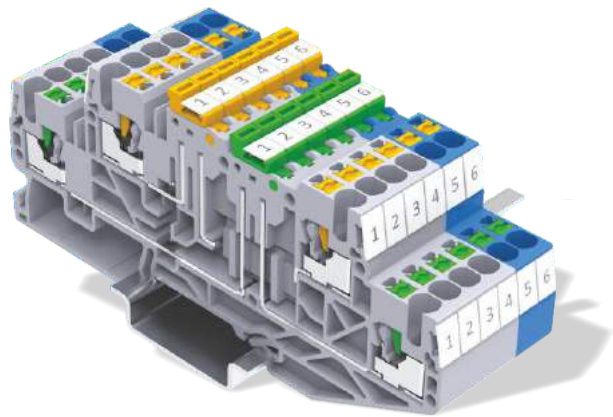

**CPDLK2.5(I.S)**

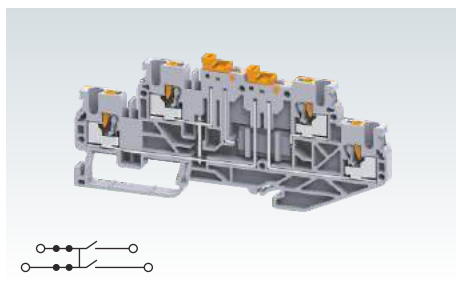

5 x 107.25 mm

50 mm / 57.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm

IEC60947-7-1 UL-1059

500 V	300 V		
16 A	14 A		




Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CPDLK2.5(I.S)	50
EPCPDLK2.5	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
MS5WHT	100
CA509/K4WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

**CPDLKFT2.5**

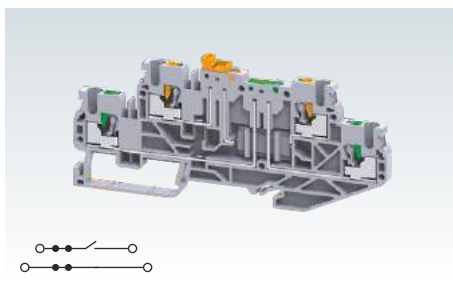

5 x 107.25 mm

50 mm / 57.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm

IEC60947-7-1 UL-1059

500 V	300 V		
16 A	14 A		




Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CPDLKFT2.5	100
EPCPDLK2.5	
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
MS5WHT	100
CA509/K4WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10

**CPDLKFT2.5(I.S)**

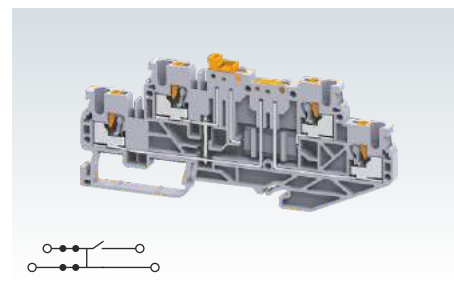

5 x 107.25 mm

50 mm / 57.5 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm

IEC60947-7-1 UL-1059

500 V	300 V		
16 A	14 A		



Polyamide 6,6 / 1

6 KV / 3

Type / Cat. No.	Standard Pack
CPDLKFT2.5(I.S)	100
EPCPDLK2.5	
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104	50
MS5WHT	100
CA509/K4WHT	100
SCM0.5/3 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX2.5/2	24 A	100
JX2.5/3	24 A	50
JX2.5/4	24 A	50
JX2.5/5	24 A	50
JX2.5/6	24 A	10
JX2.5/7	24 A	10
JX2.5/8	24 A	10
JX2.5/10	24 A	10


# SENSOR & ACTUATOR TERMINAL BLOCKS

Sensors and actuator Terminal Blocks are ideal for wiring modern machine control systems. These Terminal Blocks are extremely compact with a terminal thickness of 3.5 mm.

CPST1.5/3 is a 3 wire sensor Terminal Block. These terminals can be bridged together with a power feed through terminal CPPT2.5/3 by using standard Push-In jumpers.

CPSTG1.5/4 is used for 4 wire sensors with ground wires and can be bridged with CPPTG2.5/4 power feed through terminal.


## CPST1.5/3

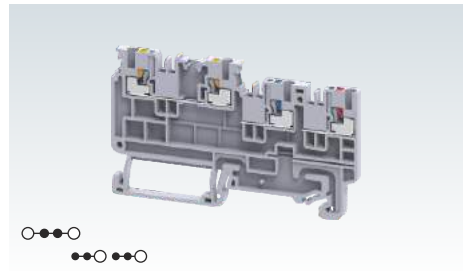


Width (Thickness) x Length	3.5 x 79.8 mm														
Height with DIN 35 x 7.5 / 35 x 15	48.1 mm / 55.55 mm														
Connection Possibility as per	<table border="1"> <tr> <th>IEC</th> <th colspan="2">UL - CSA</th> </tr> <tr> <td>0.2 - 1.5 mm<sup>2</sup></td> <td colspan="2">24 - 14 AWG</td> </tr> <tr> <td>0.2 - 2.5 mm<sup>2</sup></td> <td colspan="2">24 - 12 AWG</td> </tr> <tr> <td>0.2 - 1.5 mm<sup>2</sup></td> <td colspan="2">24 - 16 AWG</td> </tr> </table>			IEC	UL - CSA		0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG		0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG		0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG	
IEC	UL - CSA														
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG														
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG														
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG														
With 1 Conductor per clamp	Stranded / Flexible														
	Solid														
	with Ferrule / Lug														
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug														
Wire Stripping Length	8 mm														
Ratings As Per	IEC60947-7-1	UL-1059													
Voltage	250 V	300 V													
Current	13.5 A	10 A													
Approvals															
Insulation Material / Material Group	Polyamide 6,6 / 1														
Rated Impulse Voltage / Pollution Degree	4 KV / 3														

	Type / Cat. No.	Standard Pack
Terminal Block	CPST1.5/3	50
Partition /Isolation Plate (PA66)	EPCPPT2.5/3	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA103 / CA104 / CA802	50
Marking Tags (Refer Pg. 224 for details)	MS3.5WHT	100
Screw Driver	SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

Shorting Links	Type / Cat. No.	I <sub>max</sub>	Standard Pack
	JX1.5/2	16 A	100
	JX1.5/3	16 A	100
	JX1.5/4	16 A	100
	JX1.5/10	16 A	10

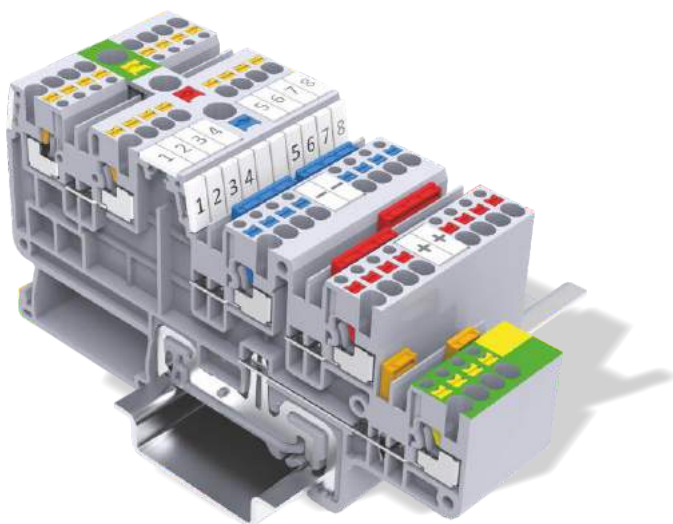

**CPSTG1.5/4**

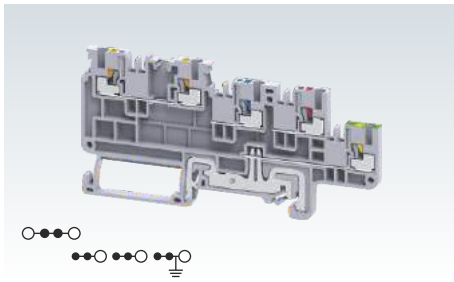

3.5 x 96.5 mm  
48.1 mm / 55.55 mm


IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm

IEC60947-7-1		UL-1059	
250 V	300 V		
13.5 A	10 A		

**CE**  
Polyamide 6,6 / 1  
4 KV / 3

**CPPT2.5/3**

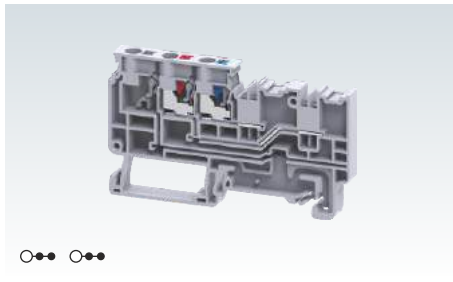

7 x 79.8 mm  
48.1 mm / 55.55 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 14 AWG


0.5 mm<sup>2</sup> 22 AWG

10 mm

IEC60947-7-1		UL-1059	
250 V	300 V		
20 A	16 A		

**CE**  
Polyamide 6,6 / 1  
4 KV / 3

**CPPTG2.5/4**

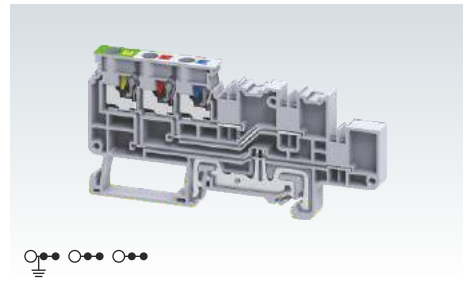

7 x 96.5 mm  
48.1 mm / 55.55 mm

IEC	UL - CSA
0.2 - 2.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 4.0 mm <sup>2</sup>	24 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 14 AWG

0.5 mm<sup>2</sup> 22 AWG

10 mm

IEC60947-7-1		UL-1059	
250 V	300 V		
20 A	16 A		

**CE**  
Polyamide 6,6 / 1  
4 KV / 3

Type / Cat. No.	Standard Pack
CPSTG1.5/4	50
EPCPPT2.5/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104 / CA802	50
MS3.5WHT	100
SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

Type / Cat. No.	Standard Pack
CPPT2.5/3	50
EPCPPT2.5/3	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104 / CA802	50
MS3.5WHT	100
SCM0.5/2 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	Standard Pack
CPPTG2.5/4	50
EPCPPT2.5/4	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA103 / CA104 / CA802	50
MS3.5WHT	100
SCM0.5/2 Blade size: 0.5 x 3 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX1.5/2	16 A	100
JX1.5/3	16 A	100
JX1.5/4	16 A	100
JX1.5/10	16 A	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX1.5/2	16 A	100
JX1.5/3	16 A	100
JX1.5/4	16 A	100
JX1.5/10	16 A	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
JX1.5/2	16 A	100
JX1.5/3	16 A	100
JX1.5/4	16 A	100
JX1.5/10	16 A	10

# MARSHALLING TERMINAL BLOCKS


CP8L32 is an 8 level marshalling Terminal Block. It offers 32 connection points in a space saving configuration for potential and signal distribution. It has Push-In technology for easy wiring connection. Standard test probes can be inserted to carry out various test protocols.

CP8L32(I.S) is internally shorted Terminal Block offering multiple connection points for distribution applications.

Colour coding provides easy identification of the termination point to ensure error free operation.

In CP8L32(I.S)H the top four levels are interconnected and the bottom four levels are shorted. They are independent of each other and are used for signal distribution applications.


## CP8L32

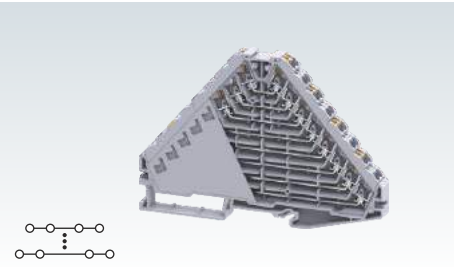

Width (Thickness) x Length	9 x 120 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	84 mm / 91.5 mm	
Connection Possibility as per	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible	24 - 14 AWG
	Solid	24 - 12 AWG
	with Ferrule / Lug	24 - 16 AWG
With 2 same size Conductors per clamp	with TWIN Ferrule / Lug	
Wire Stripping Length	8 mm	
Ratings As Per	IEC60947-7-1	UL-1059
Voltage	320 V	300 V
Current	8 A	10 A
Approval		
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	4 KV / 3	

	Type / Cat. No.	Standard Pack
Terminal Block	CP8L32	10
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S	50 m
	CA701-15-1M / CA701-15-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802 / CA103	50
Separator Plate	SPCP8L32	10
Retaining Bracket	RBCP8L32	10
Marker for SP	CA509/K3.5V	100
Marking Tags (Refer Pg. 224 for details)	CA509/K9WHT	100
Screw Driver	SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

### CP8L32(I.S)

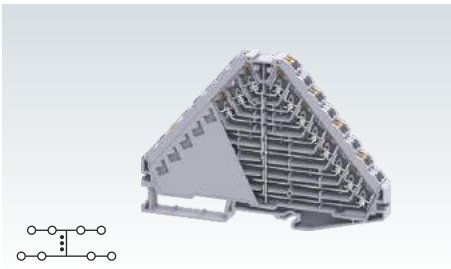

9 x 120 mm

84 mm / 91.5 mm

IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm

IEC60947-7-1 UL-1059

320 V	300 V		
8 A	10 A		




Polyamide 6,6 / 1

4 KV / 3

Type / Cat. No.	Standard Pack
CP8L32(I.S)	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
SPCP8L32	10
RBCP8L32	10
CA509/K3.5V	100
CA509/K9WHT	100
SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10

### CP8L32(I.S)H

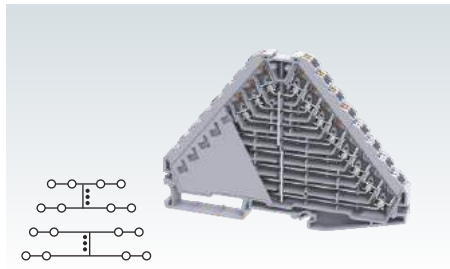

9 x 120 mm

84 mm / 91.5 mm

IEC	UL - CSA
0.2 - 1.5 mm <sup>2</sup>	24 - 14 AWG
0.2 - 2.5 mm <sup>2</sup>	24 - 12 AWG
0.2 - 1.5 mm <sup>2</sup>	24 - 16 AWG

8 mm

IEC60947-7-1 UL-1059

320 V	300 V		
8 A	10 A		



Polyamide 6,6 / 1

4 KV / 3

Type / Cat. No.	Standard Pack
CP8L32(I.S)H	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA103	50
SPCP8L32	10
RBCP8L32	10
CA509/K3.5V	100
CA509/K9WHT	100
SCM0.4/2.5 Blade size: 0.4 x 2.5 mm	10




# STUD & BOLT TYPE TERMINAL BLOCKS

Stud Type Terminal Blocks are used in application subject to severe vibration. Connection is made by crimping the wire on a ring / fork plug which is screwed on to the flat current bar.




## STUD & BOLT TYPE TERMINAL BLOCKS



**Feed Through**

**175 - 183**

---



**Disconnect & Test**

**184 - 190**


---




**Power Terminal Blocks**

**191 - 195**


---

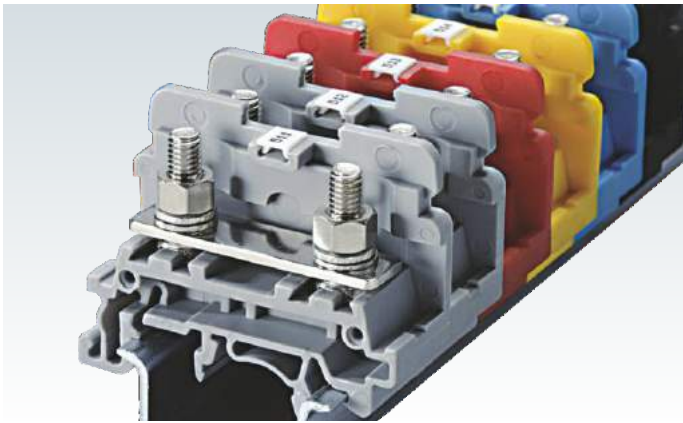


High Torque clamping system for ring & fork type lugs / ferrules. Extremely effective clamping system for areas prone to high vibrations.

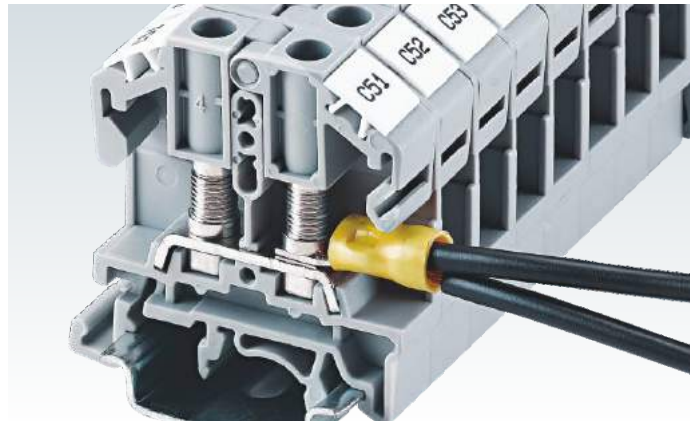


Multiple wires can be connected on a single clamping point. The bolt & nut system make these multi wire connections safe and secure.

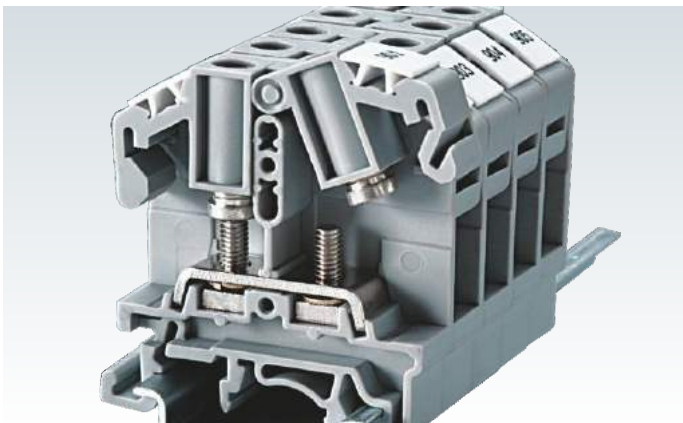


The fastening nut remains captive in the hinged plastic carrier. The nut is tightened by using a standard screwdriver.

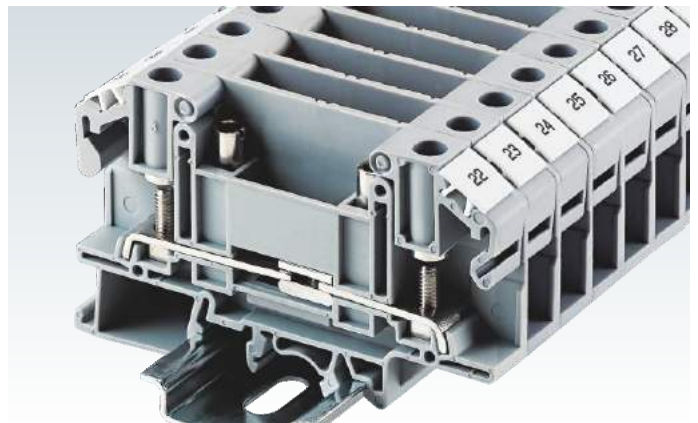


Disconnecting Terminal Block system is a versatile wire connection method for current transformer and power meters. A wide range of accessories eases the testing of these instruments.

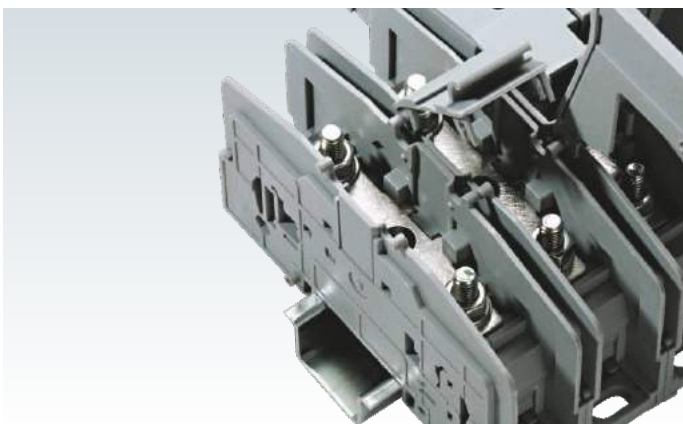


High current Terminal Blocks with a captive bolt provide extremely reliable connection for higher size wires. Integral isolation plates make these terminals extremely safe.

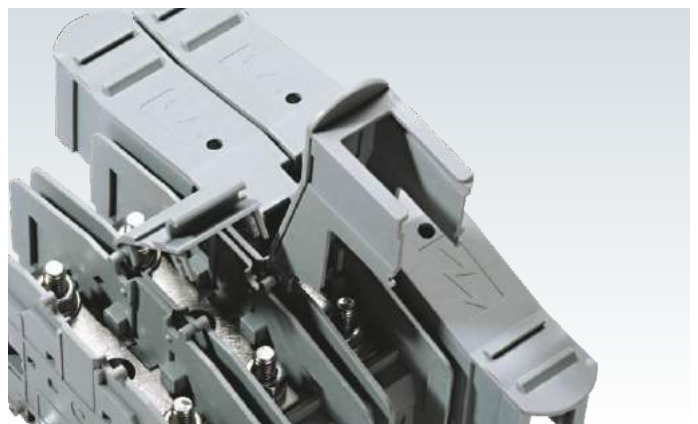


All open connection stud type Terminal Blocks can be covered with a protective shroud. The resulting assemblies are completely shock proof.

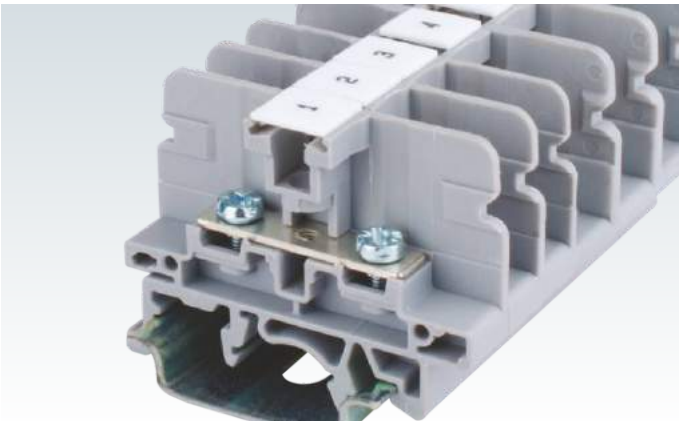

Barrier type Terminal Block CBS Series for quick wire connection for ring & fork type lugs. Terminals can be interconnected using standard shorting accessories.

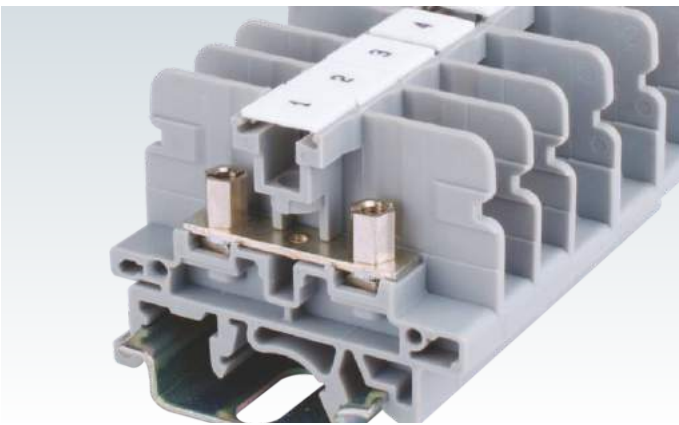

CSB series standard stud type terminals can be operated with screw / nut driver. Circuit identification can be achieved with standard marking tags.

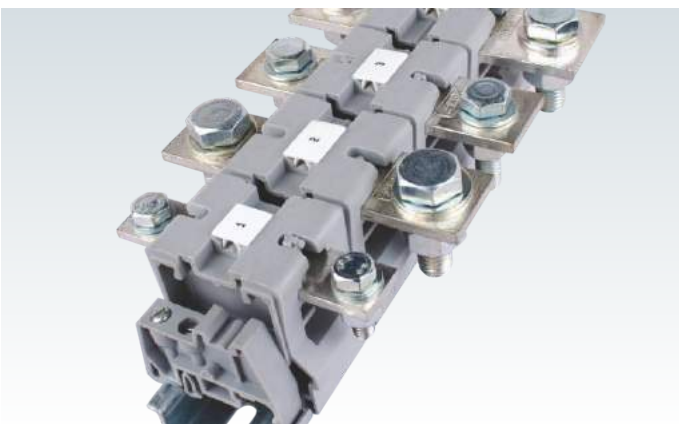

High current Bus Bar Terminal Blocks are available upto 185sq.mm cable connections.

# FEED THROUGH TERMINAL BLOCKS

STH Series Terminal Blocks are preferred for application where the connections are subjected to severe vibration. The wire is crimped to a ring / fork lug and is screwed on to the flat current bar of the Terminal Block. The fastening nut always remains captive in the hinged plastic carrier. The hinged carrier should be lifted to insert the lugs and then snapped back into position. The nut can then be fastened to complete the connection. The nut can be operated by using a standard screwdriver.

These Terminal Blocks have IP20 (Finger Safe) protection & do not need any additional shrouding.


Two Lugs can be connected to the Terminal, without sacrificing the safety of the Terminal Block.

STH4TP terminals have socket headed screws to accept standard Ø 4.3 mm test plugs.

In STH3 & STH6 terminals internal shorting links can be used for cross connection. This is in addition to the available external shorting links.

Width (Thickness) x Length		9 x 47 mm
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail		47.25 mm / 54.75 mm / 52.1 mm
Connection Possibility as per		IEC
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	UL - CSA
	Solid with Ferrule / Lug	22 - 8 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 6.0 mm <sup>2</sup>
		22 - 8 AWG
Ratings As Per		IEC60947-7-1
Voltage		1000 V
Current		41 A
Torque		0.5 Nm
Approvals		UL-1059
Insulation Material / Material Group		600 V
Rated Impulse Voltage / Pollution Degree		600 V
		630 V
		41 A
		50 A
		50 A
		36 A
		0.5 Nm
		4.5 lb-in
		4.5 lb-in
		0.5 Nm
Approvals		IECEE CE UL US C US Ex IEC AEx
Insulation Material / Material Group		Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree		8 KV / 3


## STH3

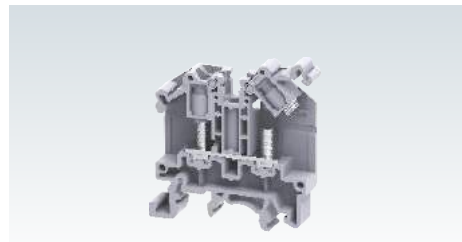

9 x 47 mm			
47.25 mm / 54.75 mm / 52.1 mm			
IEC		UL - CSA	
1.5 - 6.0 mm <sup>2</sup>		22 - 8 AWG	
1.5 - 6.0 mm <sup>2</sup>		22 - 8 AWG	
1.5 - 6.0 mm <sup>2</sup>		22 - 8 AWG	
IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	630 V
41 A	50 A	50 A	36 A
0.5 Nm	4.5 lb-in	4.5 lb-in	0.5 Nm
IECEE CE UL US C US Ex IEC AEx			
Polyamide 6,6 / 1			
8 KV / 3			

Terminal Block	With Standard Screw	With Socket Headed Screw
End Plate		
Mounting Rail	(Refer Pg. 219 for details)	
End Clamp	(Refer Pg. 220 for details)	
Marking Tags	(Refer Pg. 224 for details)	
Screw Driver		
Stud Size	M3	
<b>Shorting Links</b>		
Removable Shorting Links		2 pole
		3 pole
		4 pole
Permanent Shorting Links		2 pole
		3 pole
		4 pole
Pre Assembled Shorting Links		2 pole
		3 pole
		4 pole
		10 pole

Type / Cat. No.	Standard Pack		
STH3	10		
EPSTH3	50		
CA701-1M / CA701-1M-S	50 m		
CA701-15-1M / CA701-15-1M-S	25 m		
CA702 / CA802	50		
CA509/K8WHT	100		
SCS0.8/4	Blade size: 0.8 x 4 mm		
	10		
	M3		
Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/15-2	CA514/15-2	35 A	100
CA512/15-3	CA514/15-3	35 A	50
CA512/15-4	CA514/15-4	35 A	50
CA512/17-2	CA514/17-2	35 A	100
CA512/17-3	CA514/17-3	35 A	50
CA512/17-4	CA514/17-4	35 A	50
CA773/2		41 A	100
CA773/3		41 A	50
CA773/4		41 A	50
CA773/10		41 A	10

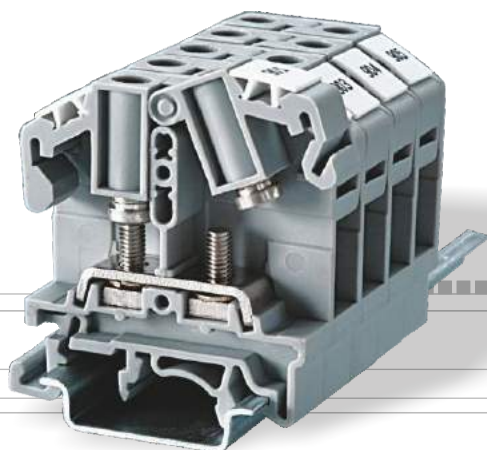











CSB3/N3UL



CSB3/N3USH




Width (Thickness) x Length	9 x 49 mm				9 x 49 mm			
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	38 mm / 45.6 mm / 43.1 mm				38 mm / 45.6 mm / 43.1 mm			
Connection Possibility as per	IEC		UL - CSA		IEC		UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug		0.5 - 6.0 mm <sup>2</sup>		22 - 8 AWG		0.5 - 6.0 mm <sup>2</sup> 22 - 8 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug		0.5 - 4.0 mm <sup>2</sup>		22 - 10 AWG		0.5 - 4.0 mm <sup>2</sup> 22 - 10 AWG	
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7	IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
Voltage	800 V	600 V	600 V	500 V	800 V	600 V	600 V	500 V
Current	41 A	50 A	50 A	36 A	41 A	50 A	50 A	36 A
Torque	0.5 Nm	4.5 lb-in	4.5 lb-in	0.5 Nm	0.5 Nm	4.5 lb-in	4.5 lb-in	0.5 Nm
Approvals								
Insulation Material / Material Group	Polyamide 6,6 / 1				Polyamide 6,6 / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3				8 KV / 3			

	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	CSB3/N3UL	100	CSB3/N3USH	100
End Plate	EPCBS3U	50	EPCBS3U	50
Mounting Rail (Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)	CA702 / CA802	50	CA702 / CA802	50
Marking Tags (Refer Pg. 224 for details)	CA509/K9WHT	100	CA509/K9WHT	100
Screw Driver	SCS1/5.5 Blade size: 1.0 x 5.5 mm	10	SCS1/5.5 Blade size: 1.0 x 5.5 mm	10
Nut Driver	SCNT5	10	SCNT5	10
Screw / Stud Size	M3		M3	

	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	
Removable Shorting Links	2 pole	CA512/15-2	CA514/15-2	35 A	100	CA512/15-2	CA514/15-2	35 A	100
	3 pole	CA512/15-3	CA514/15-3	35 A	50	CA512/15-3	CA514/15-3	35 A	50
	4 pole	CA512/15-4	CA514/15-4	35 A	50	CA512/15-4	CA514/15-4	35 A	50
Permanent Shorting Links	2 pole	CA512/17-2	CA514/17-2	35 A	100	CA512/17-2	CA514/17-2	35 A	100
	3 pole	CA512/17-3	CA514/17-3	35 A	50	CA512/17-3	CA514/17-3	35 A	50
	4 pole	CA512/17-4	CA514/17-4	35 A	50	CA512/17-4	CA514/17-4	35 A	50
Pre Assembled Shorting Links	2 pole	CA728/2		41 A	50	CA728/2		41 A	50
	3 pole	CA728/3		41 A	50	CA728/3		41 A	50
	4 pole	CA728/4		41 A	50	CA728/4		41 A	50
	10 pole	CA728/10		41 A	10	CA728/10		41 A	10
Protective Cover (Polycarbonate)	2 Terminal								
	3 Terminal	CSTSPC2			10	CSTSPC2			10
Long Protective Cover (Acrylic)	4 Terminal	CSTSPC2-1			10	CSTSPC2-1			10
	100 mm	CSTSPC1-2			10	CSTSPC1-2			10
	200 mm	CSTSPC1-3			10	CSTSPC1-3			10
	300 mm	CSTSPC1-4			10	CSTSPC1-4			10

**CSB4/N4U**



13 x 49 mm

38 mm / 45.6 mm / 43.1 mm

IEC **UL - CSA**

1.5 - 10.0 mm<sup>2</sup>

16 - 6 AWG

1.5 - 6.0 mm<sup>2</sup>

16 - 8 AWG

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1100 V 600 V 600 V 500 V

57 A 65 A 65 A 51 A


1.2 Nm 10 lb-in 10 lb-in 1.2 Nm



Polyamide 6,6 / 1

8 KV / 3

**CSB4/N4USH**



13 x 49 mm

38 mm / 45.6 mm / 43.1 mm

IEC **UL - CSA**

1.5 - 10.0 mm<sup>2</sup>

16 - 6 AWG

1.5 - 6.0 mm<sup>2</sup>

16 - 8 AWG

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1100 V 600 V 600 V 500 V

57 A 65 A 65 A 51 A


1.2 Nm 10 lb-in 10 lb-in 1.2 Nm



Polyamide 6,6 / 1

8 KV / 3

**CSB5/N5U**



13 x 49 mm

38 mm / 45.6 mm / 43.1 mm

IEC **UL - CSA**

1.5 - 16.0 mm<sup>2</sup>

16 - 4 AWG

1.5 - 10.0 mm<sup>2</sup>

16 - 6 AWG

IEC60947-7-1 UL-1059 CSA22.2-158 IEC60079-7

1100 V 600 V 600 V 630 V

76 A 85 A 85 A 68 A

2.0 Nm 25 lb-in 25 lb-in 2.0 Nm



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CSB4/N4U	100
EPCBS3U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K9WHT	100
SCS1/5.5 Blade size: 1.0 x 5.5 mm	10

M4

Type / Cat. No.	Standard Pack
CSB4/N4USH	100
EPCBS3U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K9WHT	100
SCS1/5.5 Blade size: 1.0 x 5.5 mm	10

M4

Type / Cat. No.	Standard Pack
CSB5/N5U	100
EPCBS3U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K9WHT	100
SCS1/5.5 Blade size: 1.0 x 5.5 mm	10

M5


Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/2-2	CA514/2-2	45 A	100
CA512/2-3	CA514/2-3	45 A	50
CA512/2-4	CA514/2-4	45 A	50
CA512/4-2	CA514/4-2	45 A	100
CA512/4-3	CA514/4-3	45 A	50
CA512/4-4	CA514/4-4	45 A	50
CA772/2		57 A	100
CA772/3		57 A	100
CA772/4		57 A	100
CA772/10		57 A	10
CSTSPC2			10
CSTSPC2-1			10
CSTSPC1-2			10
CSTSPC1-3			10
CSTSPC1-4			10

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/2-2	CA514/2-2	45 A	100
CA512/2-3	CA514/2-3	45 A	50
CA512/2-4	CA514/2-4	45 A	50
CA512/4-2	CA514/4-2	45 A	100
CA512/4-3	CA514/4-3	45 A	50
CA512/4-4	CA514/4-4	45 A	50
CA772/2		57 A	100
CA772/3		57 A	100
CA772/4		57 A	100
CA772/10		57 A	10
CSTSPC2			10
CSTSPC2-1			10
CSTSPC1-2			10
CSTSPC1-3			10
CSTSPC1-4			10

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/2-2	CA514/2-2	45 A	100
CA512/2-3	CA514/2-3	45 A	50
CA512/2-4	CA514/2-4	45 A	50
CA512/4-2	CA514/4-2	45 A	100
CA512/4-3	CA514/4-3	45 A	50
CA512/4-4	CA514/4-4	45 A	50
CA772/2		60 A	100
CA772/3		60 A	100
CA772/4		60 A	100
CA772/10		60 A	10
CSTSPC2			10
CSTSPC2-1			10
CSTSPC1-2			10
CSTSPC1-3			10
CSTSPC1-4			10



**CSTSN5U**



17 x 50 mm  
40.7 mm / 48.0 mm / 46.3 mm

IEC **UL - CSA**

1.5 - 16.0 mm<sup>2</sup> 22 - 4 AWG

1.5 - 16.0 mm<sup>2</sup> 22 - 4 AWG


IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
76 A	80 A	80 A
2.0 Nm	25 lb-in	25 lb-in



Polyamide 6,6 / 1

8 KV / 3

**CSTSN6U**



17 x 50 mm  
40.7 mm / 48.0 mm / 46.3 mm

IEC **UL - CSA**

1.5 - 35.0 mm<sup>2</sup> 22 - 2 AWG

1.5 - 35.0 mm<sup>2</sup> 22 - 2 AWG


IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
125 A	125 A	125 A
3.0 Nm	25 lb-in	25 lb-in



Polyamide 6,6 / 1

8 KV / 3

**CSTSN6USH**



17 x 50 mm  
40.7 mm / 48.0 mm / 46.3 mm

IEC **UL - CSA**

1.5 - 35.0 mm<sup>2</sup> 22 - 2 AWG

1.5 - 35.0 mm<sup>2</sup> 22 - 2 AWG

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
125 A	125 A	125 A
3.0 Nm	25 lb-in	25 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CSTSN5U	100
EPCSTSU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K2B4WHT	100

M5

Type / Cat. No.	Standard Pack
CSTSN6U	100
EPCSTSU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K2B4WHT	100

M6

Type / Cat. No.	Standard Pack
CSTSN6USH	100
EPCSTSU	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K2B4WHT	100

M6

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/1-2	CA514/1-2	45 A	100
CA512/1-3	CA514/1-3	45 A	50
CA512/1-4	CA514/1-4	45 A	50
CA512/3-2	CA514/3-2	45 A	100
CA512/3-3	CA514/3-3	45 A	50
CA512/3-4	CA514/3-4	45 A	50

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/7-2	CA514/7-2	50 A	100
CA512/7-3	CA514/7-3	50 A	50
CA512/7-4	CA514/7-4	50 A	50
CA512/8-2	CA514/8-2	50 A	100
CA512/8-3	CA514/8-3	50 A	50
CA512/8-4	CA514/8-4	50 A	50


Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/7-2	CA514/7-2	50 A	100
CA512/7-3	CA514/7-3	50 A	50
CA512/7-4	CA514/7-4	50 A	50
CA512/8-2	CA514/8-2	50 A	100
CA512/8-3	CA514/8-3	50 A	50
CA512/8-4	CA514/8-4	50 A	50

CSTSPC1		100
CSTSPC1-1		100
CSTSPC1-2		10
CSTSPC1-3		10
CSTSPC1-4		10

CSTSPC1		100
CSTSPC1-1		100
CSTSPC1-2		10
CSTSPC1-3		10
CSTSPC1-4		10

CSTSPC1		100
CSTSPC1-1		100
CSTSPC1-2		10
CSTSPC1-3		10
CSTSPC1-4		10

CSE5U

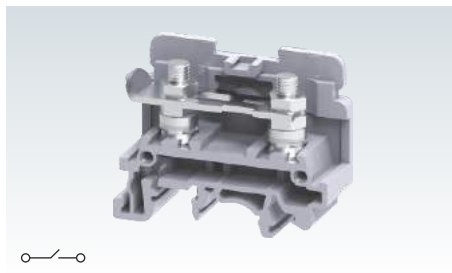

Width (Thickness) x Length	17 x 50 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	40.7 mm / 48.0 mm / 46.3 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 16.0 mm <sup>2</sup>	22 - 4 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 16.0 mm <sup>2</sup>	22 - 4 AWG
Ratings As Per	IEC60947-7-1		
Voltage	800 V		
Current	76 A		
Torque	2.0 Nm		
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree			

		Type / Cat. No.	Standard Pack
Terminal Block	Grey	CSE5U*	100
End Plate		EPCSTSU	50
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp (Refer Pg. 220 for details)		CA702 / CA802	50
Marking Tags (Refer Pg. 224 for details)		CA509/K2B4WHT	100
Screw Driver		M5	
Nut Driver			
Screw / Stud Size			

Shorting Links		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	
Removable Shorting Links		2 pole	CA512/1-2	CA514/1-2	45 A	100
		3 pole	CA512/1-3	CA514/1-3	45 A	50
		4 pole	CA512/1-4	CA514/1-4	45 A	50
Permanent Shorting Links		2 pole	CA512/3-2	CA514/3-2	45 A	100
		3 pole	CA512/3-3	CA514/3-3	45 A	50
		4 pole	CA512/3-4	CA514/3-4	45 A	50
Pre Assembled Shorting Links		2 pole				
		3 pole				
		4 pole				
		10 pole				
Protective Cover (Polycarbonate)		2 Terminal				
		3 Terminal				
		4 Terminal				
Long Protective Cover (Acrylic)		100 mm				
		200 mm				
		300 mm				

\* CSE5U Terminal Block is used for earth link disconnection application.

# DISCONNECT & TEST TERMINAL BLOCKS


CBDT4U Disconnect & Test Terminal Block is used for measuring, control and regulatory circuits.

Disconnection is achieved by means of a slide link operated with a Screw Driver.

CBDT4U terminals have a barrel nut configuration which can be operated with a screw driver.

Adjacent terminal can be shorted with the aid of removable and permanent shorting link. Also pre assembled internal shorting link can be used for shorting. Temporary shorting can be achieved using SWCBDT switchable link assembly.

## CBDT4U

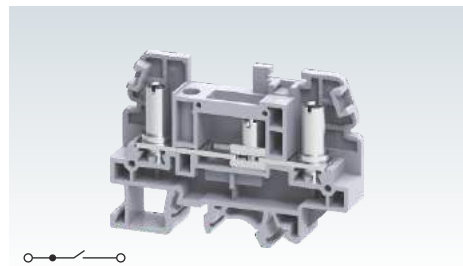

Width (Thickness) x Length	13 x 71 mm		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	50.2 mm / 57.7 mm / 54.8 mm		
Connection Possibility as per	IEC		
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	UL - CSA	
	Solid with Ferrule / Lug	16 - 8 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	16 - 8 AWG	
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158
Voltage	1100 V	600 V	600 V
Current	41 A	45 A	45 A
Torque	1.2 Nm	14 lb-in	14 lb-in
Approvals			
Insulation Material / Material Group	Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

Terminal Block	Grey
End Plate	
Mounting Rail (Refer Pg. 219 for details)	
End Clamp (Refer Pg. 220 for details)	
Marking Tags (Refer Pg. 224 for details)	
Screw Driver	
Screw / Stud Size	M4

Type / Cat. No.	Standard Pack
CBDT4U	50
EPCBDT4U	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA502 / CA702	50
CA509/K2B4WHT	100
SCS1/5.5 Blade size: 1.0 x 5.5 mm	10

Shorting Links	
Removable Shorting Links	2 pole
	3 pole
	4 pole
Permanent Shorting Links	2 pole
	3 pole
	4 pole
Pre Assembled Shorting Links	2 pole
	3 pole
	4 pole
	10 pole
Protective Cover (Polycarbonate)	2 Terminal
	3 Terminal
	4 Terminal
Long Protective Cover (Acrylic)	100 mm
	200 mm
	300 mm
Switchable Link Assembly	

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/2-2	CA514/2-2	41 A	100
CA512/2-3	CA514/2-3	41 A	50
CA512/2-4	CA514/2-4	41 A	50
CA512/4-2	CA514/4-2	41 A	100
CA512/4-3	CA514/4-3	41 A	50
CA512/4-4	CA514/4-4	41 A	50
CA775/2		25 A	100
CA775/3		25 A	50
CA775/4		25 A	50
CA775/10		25 A	10
CDTPC1			100
CDTPC2			100
CDTPC3			10
CDTPC4			10
CDTPC5			10
SWCBDT		41 A	50

# DISCONNECT & TEST TERMINAL BLOCKS

STH4DT Disconnect & Test Terminal Block is used for measuring, control and regulatory circuits. They provide a clear functional advantage for devices having utility instruments and associated transformers.


Separate testing points facilitate insertion of test probes. Disconnection is achieved by means of a slide link operated with a Screw Driver.

STH4DTSH Terminal Block has 2 STH4DT Terminal Blocks shorted to achieve switchable cross connection for current transformers (on one side).

STH4DTFT is a feed through terminal with the same profile of the STH4DT Terminal Block.

In all of the above Terminal Blocks, two Lugs can be connected to the Terminal, without sacrificing the safety of the Terminal Block.

## STH4DT


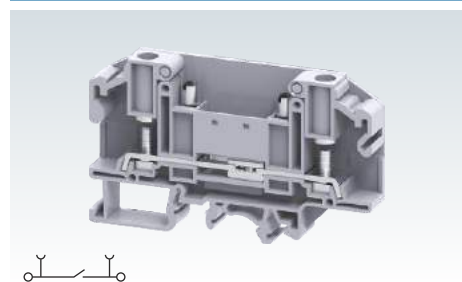


Width (Thickness) x Length	11 x 86 mm																		
Height with DIN 35 x 7.5 / 35 x 15 / 32 mm Rail	52.2 mm / 59.0 mm / 56.4 mm																		
Connection Possibility as per	<table border="1"> <tr> <th>IEC</th> <th colspan="2">UL - CSA</th> </tr> <tr> <td>1.5 - 6.0 mm<sup>2</sup></td> <td colspan="2">22 - 8 AWG</td> </tr> </table>			IEC	UL - CSA		1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG											
IEC	UL - CSA																		
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG																		
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug Solid with Ferrule / Lug																		
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug																		
Ratings As Per	<table border="1"> <tr> <th>IEC60947-7-1</th> <th>UL-1059</th> <th colspan="2">CSA22.2-158</th> </tr> <tr> <td>1000 V</td> <td>600 V</td> <td colspan="2">600 V</td> </tr> <tr> <td>41 A</td> <td>35 A</td> <td colspan="2">35 A</td> </tr> <tr> <td>1.2 Nm</td> <td>14 lb-in</td> <td colspan="2">14 lb-in</td> </tr> </table>			IEC60947-7-1	UL-1059	CSA22.2-158		1000 V	600 V	600 V		41 A	35 A	35 A		1.2 Nm	14 lb-in	14 lb-in	
IEC60947-7-1	UL-1059	CSA22.2-158																	
1000 V	600 V	600 V																	
41 A	35 A	35 A																	
1.2 Nm	14 lb-in	14 lb-in																	
Current	<table border="1"> <tr> <td>41 A</td> <td>35 A</td> <td>35 A</td> </tr> </table>			41 A	35 A	35 A													
41 A	35 A	35 A																	
Torque	1.2 Nm    14 lb-in    14 lb-in																		
Approvals																			
Insulation Material / Material Group	Polyamide 6,6 / 1																		
Rated Impulse Voltage / Pollution Degree	8 KV / 3																		

		Type / Cat. No.	Standard Pack
Terminal Block	With Standard Screw	STH4DT	50
	With Socket Headed Screw	STH4DT/S	50
	With Test Socket Tapped	STH4DTTP	50
End Plate		EPSTH4DT	50
Mounting Rail	(Refer Pg. 219 for details)	CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m
End Clamp	(Refer Pg. 220 for details)	CA702 / CA802	50
Marking Tags	(Refer Pg. 224 for details)	CA509/K10WHT	100
Screw Driver		SCS1.0/5.5    Blade size: 1.0 x 5.5 mm	10
Screw / Stud Size		M4	

		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Removable Shorting Links	2 pole	CA512/13-2	CA514/13-2	35 A	100
	3 pole	CA512/13-3	CA514/13-3	35 A	50
	4 pole	CA512/13-4	CA514/13-4	35 A	50
	2 pole	CA512/14-2	CA514/14-2	35 A	100
Permanent Shorting Links	3 pole	CA512/14-3	CA514/14-3	35 A	50
	4 pole	CA512/14-4	CA514/14-4	35 A	50
	3 pole	CA514/14-3A		35 A	10
Insulated Alternate Permanent Shorting Links	4 pole	CA514/14-4A		35 A	10
	2 pole	QJ11/2			25
Shorting Plug	4 pole	QJ11/4			25
	Lock Out Cap	LCSTH4DT			50

### STH4DTSH



22 x 86 mm

52.2 mm / 59.0 mm / 56.4 mm

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG

1.5 - 6.0 mm<sup>2</sup>      22 - 8 AWG

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	300 V	300 V
34 A	25 A	25 A
1.2 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3


Type / Cat. No.	Standard Pack
STH4DTSH	24

EPSTH4DT	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K10WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

M4

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/13-2	CA514/13-2	34 A	100
CA512/13-3	CA514/13-3	34 A	50
CA512/13-4	CA514/13-4	34 A	50
CA512/14-2	CA514/14-2	34 A	100
CA512/14-3	CA514/14-3	34 A	50
CA512/14-4	CA514/14-4	34 A	50
CA514/14-3A		34 A	10
CA514/14-4A		34 A	10
QJ11/2			25
QJ11/4			25
LCSTH4DT			50

### STH4DTFT



11 x 86 mm

52.2 mm / 59.0 mm / 56.4 mm

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG

1.5 - 6.0 mm<sup>2</sup>      22 - 8 AWG

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	300 V
41 A	50 A	50 A
1.2 Nm	14 lb-in	14 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
STH4DTFT	50



EPSTH4DT	50
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802	50
CA509/K10WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

M4

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA512/13-2	CA514/13-2	35 A	100
CA512/13-3	CA514/13-3	35 A	50
CA512/13-4	CA514/13-4	35 A	50
CA512/14-2	CA514/14-2	35 A	100
CA512/14-3	CA514/14-3	35 A	50
CA512/14-4	CA514/14-4	35 A	50
CA514/14-3A		35 A	10
CA514/14-4A		35 A	10
QJ11/2			25
QJ11/4			25
LCSTH4DT			50




# Usage of STH4DT Test Disconnect Terminal Block for metering CT for 3 wire system

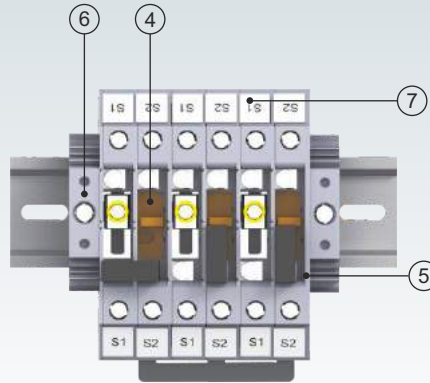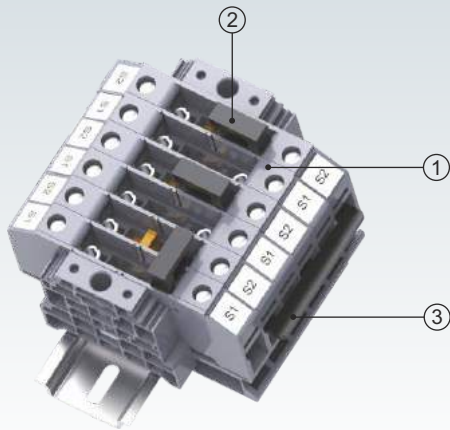


No.	Cat. No.	Qty.
1	STH4DT	6
2	QJ11/2	3
3	CA514/14-3A	1
4	LCSTH4DT	3
5	EPSTH4DT	1
6	CA202	2
7	CA509/K10	12

Operating Status

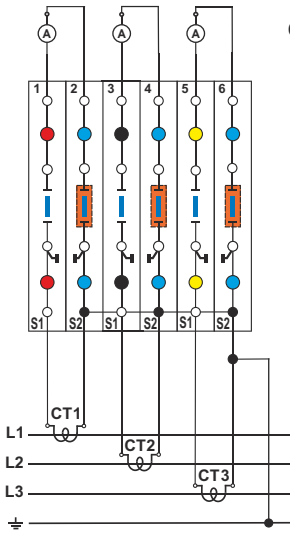


Measurement Standard for Phase L1

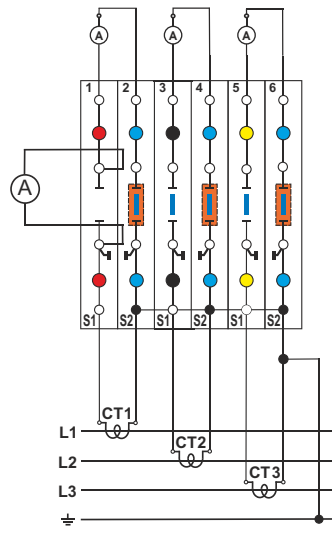

**Sequence for test :**

- 1) Connect a Ammeter to test sockets of terminal 1
- 2) Open disconnect slide link of terminal 1
- 3) Take the measurement


Measurement with External Current Source

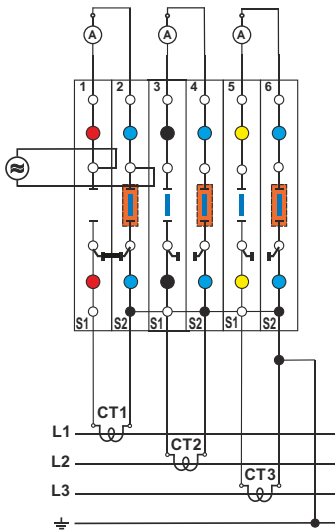

**Sequence for test :**

- 1) Close the terminals 1 & 2 with shorting plug QJ11/2
- 2) Open disconnect slide link of terminal 1
- 3) Connect the external source to the test sockets of the terminals 1 & 2.
- 4) Take the measurement






Replacement Meter for Phase L1

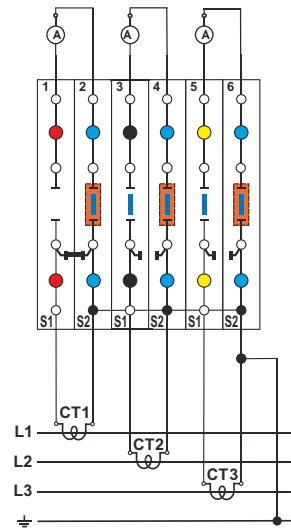



**Sequence for test :**

- 1) Close the terminals 1 & 2 with shorting plug QJ11/2
- 2) Open disconnect slide link of terminal 1
- 3) Disconnect the meter from phase R of the terminals 1 & 2.
- 4) Replace the meter





# Usage of STH4DT Test Disconnect Terminal Block for metering CT for 4 wire system

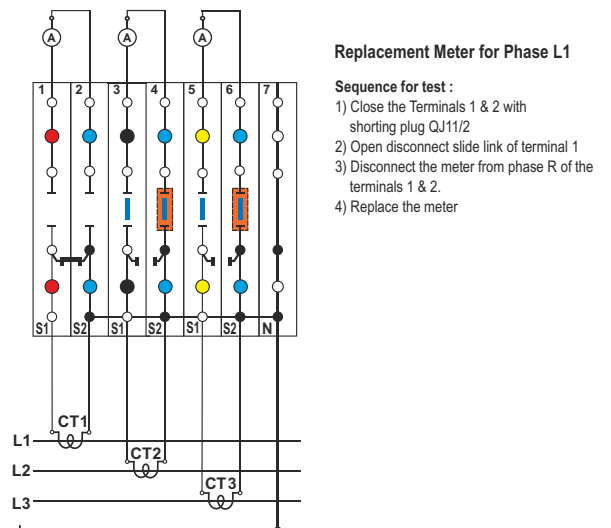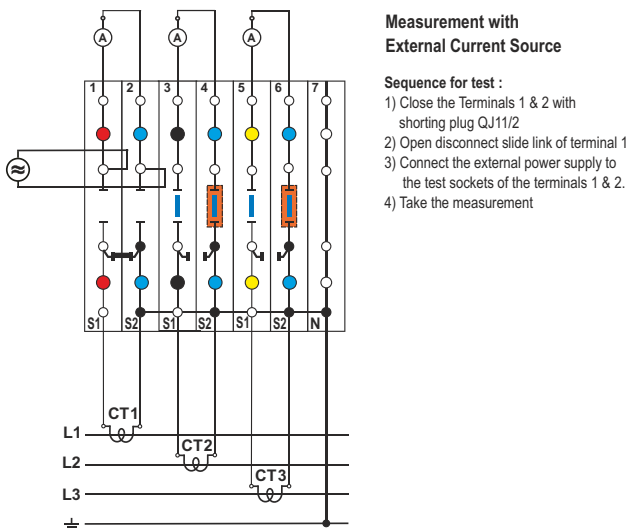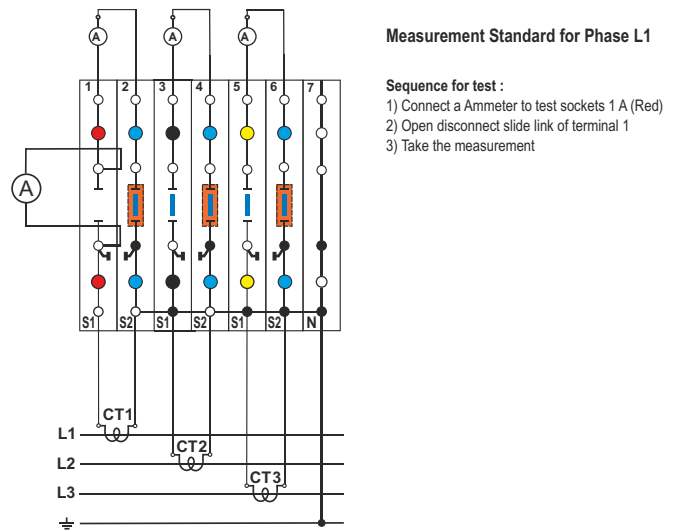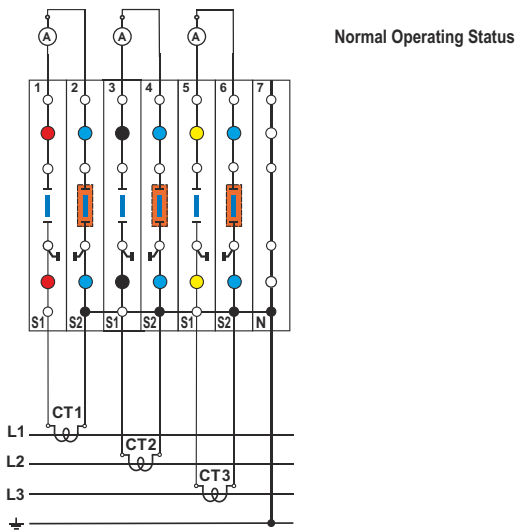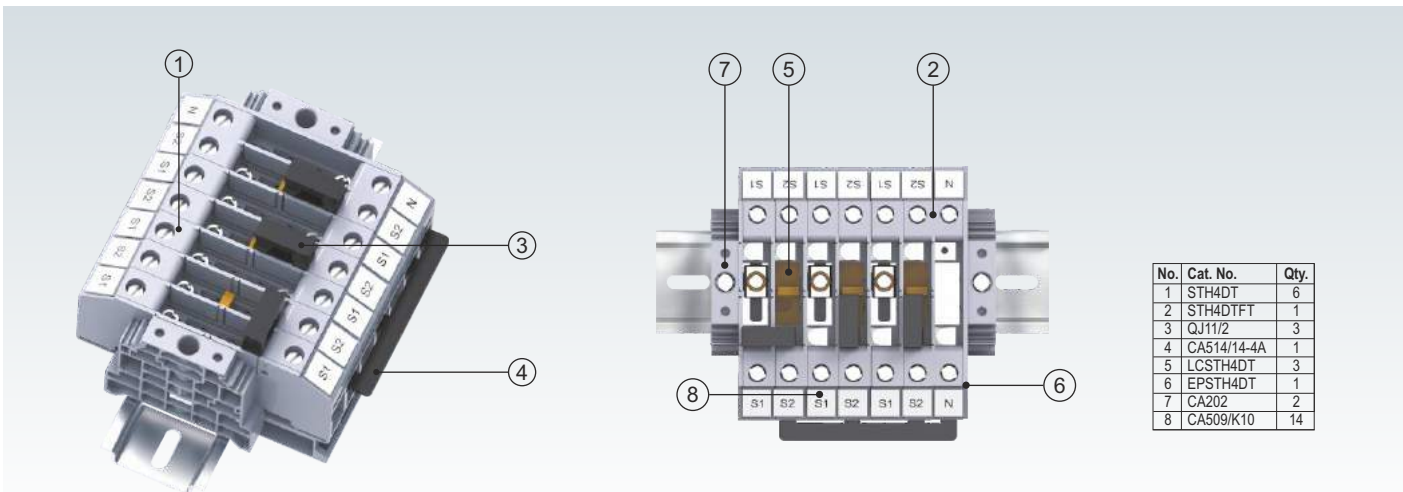


# Usage of STH4DT Test Disconnect Terminal Block for multi function meter for 3 wire system

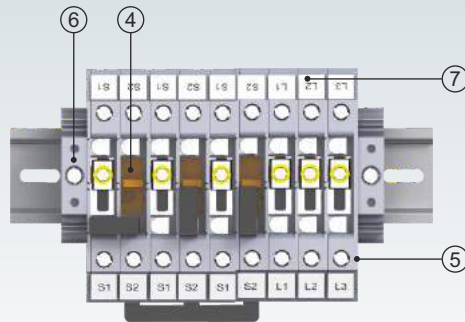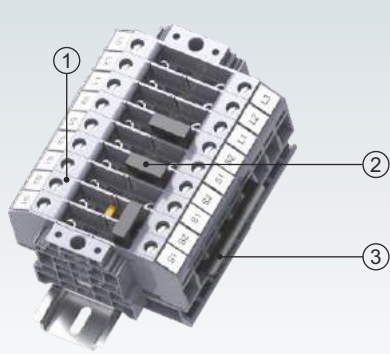


No.	Cat. No.	Qty.
1	STH4DT	9
2	QJ11/2	3
3	CA514/14-3A	1
4	LCSTH4DT	3
5	EPSTH4DT	1
6	CA202	2
7	CA509/K10	18

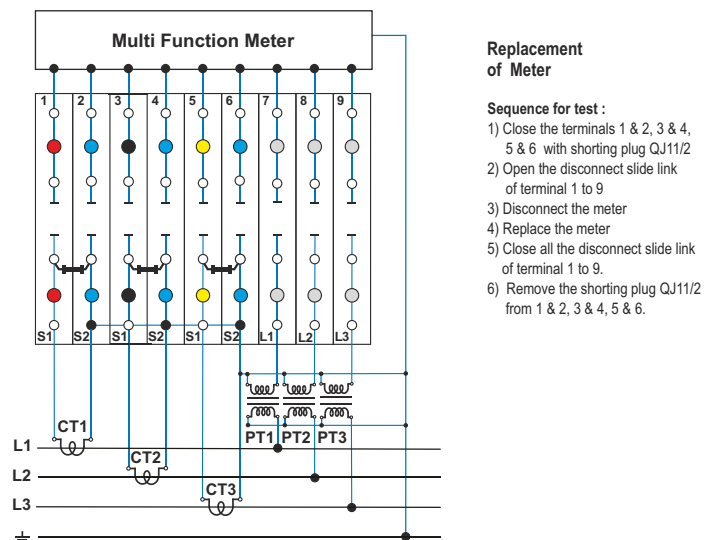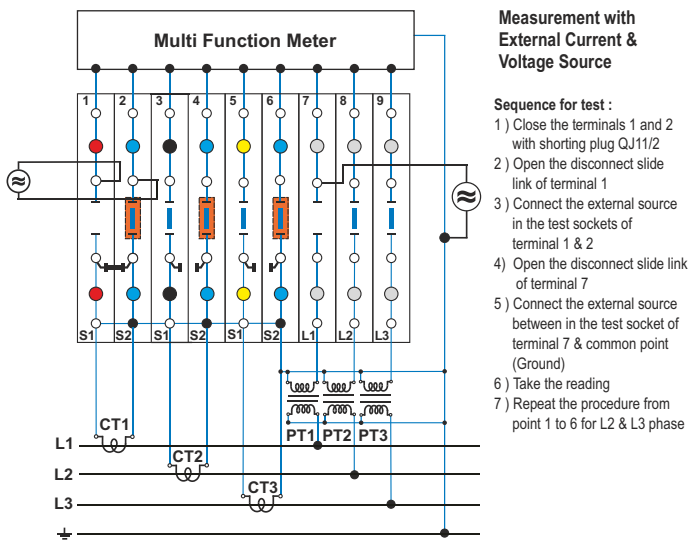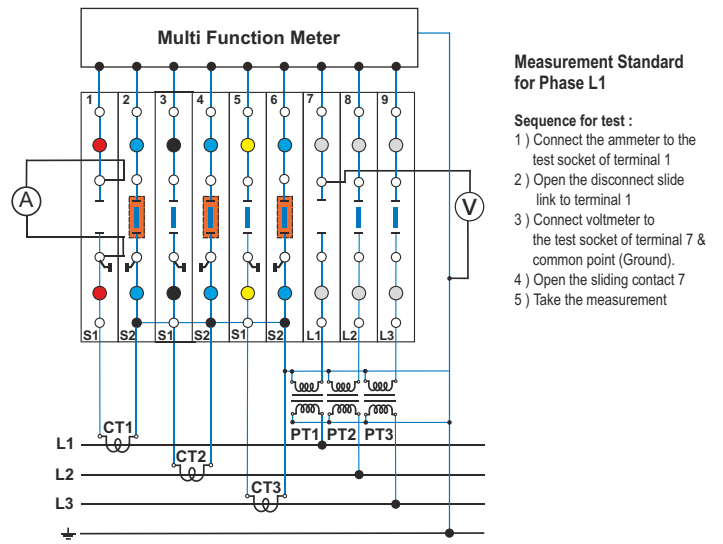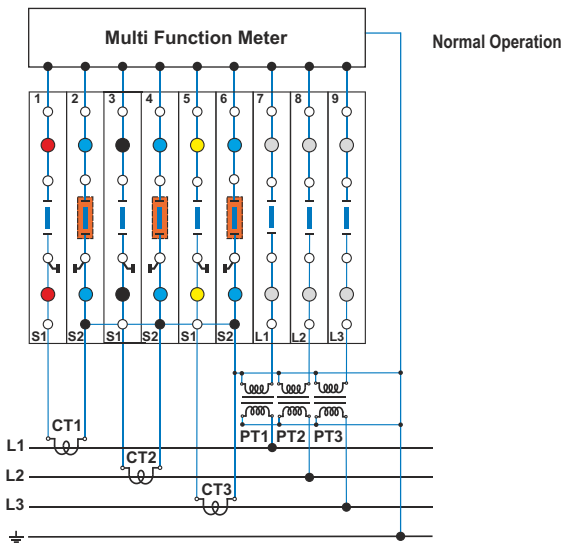


# Usage of STH4DT Test Disconnect Terminal Block for multi function meter for 4 wire system

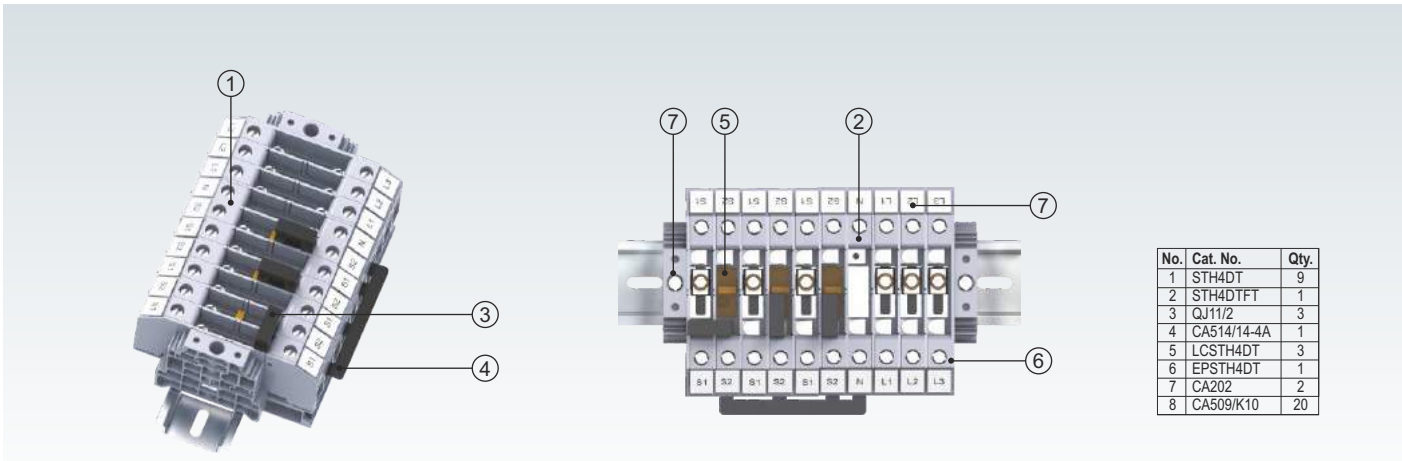

No.	Cat. No.	Qty.
1	STH4DT	9
2	STH4DTFT	1
3	QJ11/2	3
4	CA514/14-4A	1
5	LCSTH4DT	3
6	EPSTH4DT	1
7	CA202	2
8	CA509/K10	20

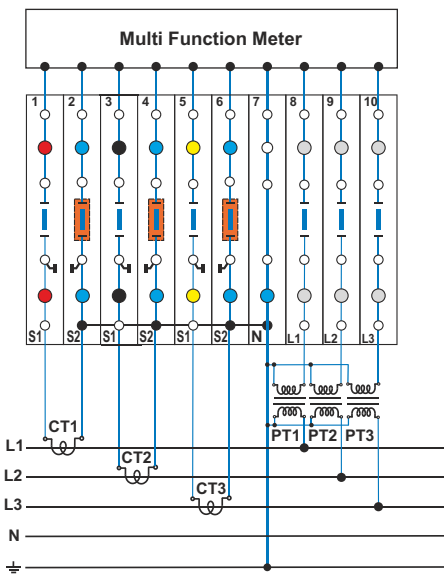


Normal Operation

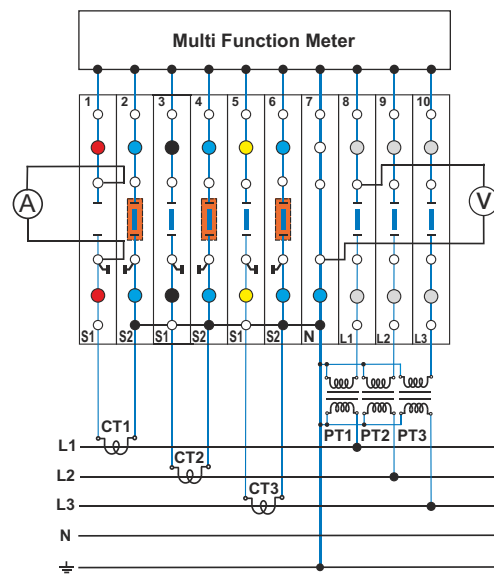


Measurement Standard for Phase L1

- Sequence for test :
- 1) Connect the ammeter to the test socket of terminal 1
  - 2) Open the disconnect slide link of terminal 1
  - 3) Take the measurement
  - 4) Connect voltmeter to terminal 7 & 8
  - 5) Take the measurement

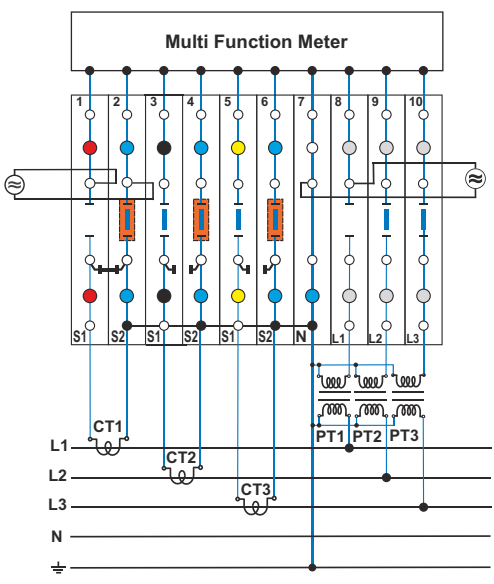

Measurement with External Current & Voltage Source

- Sequence for test :
- 1) Close the terminals 1 and 2 with shorting plug QJ11/2
  - 2) Open the disconnect slide link of terminal 1
  - 3) Connect the external source in the test sockets of terminal 1 & 2
  - 4) Open the disconnect slide link of terminal 7
  - 5) Connect the external source between in the test socket of terminal 7 & common point (Ground)
  - 6) Take the reading
  - 7) Repeat the procedure from point 1 to 6 for L2 & L3 phase

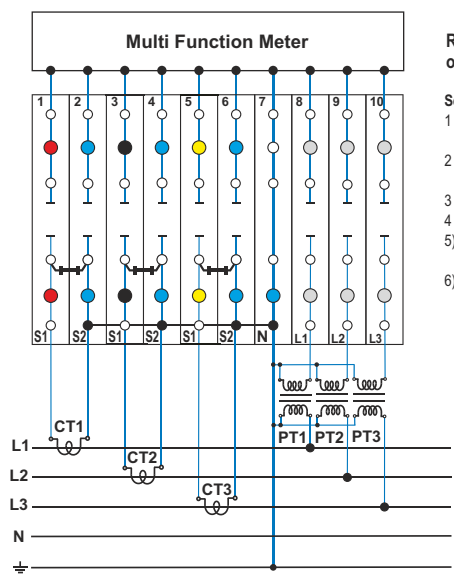

Replacement of Meter

- Sequence for test :
- 1) Close the terminals 1 & 2, 3 & 4, 5 & 6 with shorting plug QJ11/2
  - 2) Open the disconnect slide link of terminal 1 to 9
  - 3) Disconnect the meter
  - 4) Replace the meter
  - 5) Close all the disconnect slide link of terminal 1 to 9.
  - 6) Remove the shorting plug QJ11/2 from 1 & 2, 3 & 4, 5 & 6.


# POWER TERMINAL BLOCKS

CBB series Terminal Blocks are preferred for application using wires of large cross section. The Wire is crimped to a ring / fork lug and is screwed on to the flat current bar of the Terminal Block. Specially designed Mounting Feet holds the Terminal Block rigidly on to the Mounting Rail.

Two Lugs of the rated cross section can be connected to the Terminal Block, without sacrificing the safety of the Terminal Block.


PPCBB series partition plates can be installed even after assembly of cables on the Terminal Blocks.




Terminals with suffix LS have a standard slotted bolt assembled in the threaded bus bar. This enables faster wiring without the need of two wrenches / spanners.

Width (Thickness) x Length		32 x 75 mm
Height with DIN 35 x 7.5 / 35 x 15 mm Rail		47.5 mm / 54.5 mm
Connection Possibility as per		
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	
Ratings As Per		
Voltage		1000 V    600 V    600 V
Current		150 A    150 A    150 A
Torque		3.0 Nm    27 lb-in    27 lb-in
Approvals		
Insulation Material / Material Group		Polyamide 6,6 / 1
Rated Impulse Voltage / Pollution Degree		8 KV / 3

## CBB35/50 & CBB35/50LS



IEC		UL - CSA	
6 - 50.0 mm <sup>2</sup>		10 - 1/0 AWG	
6 - 50.0 mm <sup>2</sup>		10 - 1/0 AWG	
IEC60947-1	UL-1059	CSA22.2-158	
1000 V	600 V	600 V	
150 A	150 A	150 A	
3.0 Nm	27 lb-in	27 lb-in	
			
Polyamide 6,6 / 1			
8 KV / 3			


Terminal Block	With Nut & Bolt configuration With Threaded Current Bar	
Partition Plate		
Mounting Rail	(Refer Pg. 219 for details)	
End Clamp	(Refer Pg. 220 for details)	
Marking Tags	(Refer Pg. 224 for details)	
Screw / Bolt Size		

Type / Cat. No.	Standard Pack
CBB35/50	10
CBB35/50LS	10
PPCBB	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K10WHT	100
M6	

Shorting Links	Uninsulated	Imax	Standard Pack
70 mm	CBBPC1/70		10
80 mm	CBBPC1/80		10
100 mm	CTSPC2-1		10
130 mm	CBBPC1/130		10
160 mm	CBBPC1/160		10
200 mm	CBBPC1/200		10
250 mm	CBBPC1/250		10
Permanent Shorting Links	CA790/2	150 A	10
	CA790/3	150 A	10

### Installation instruction:

It is recommended to provide a back support to the wire while tightening the clamping bolt to avoid deformation of the mounting rail or to prevent damage of the Terminal Block by torsional force.

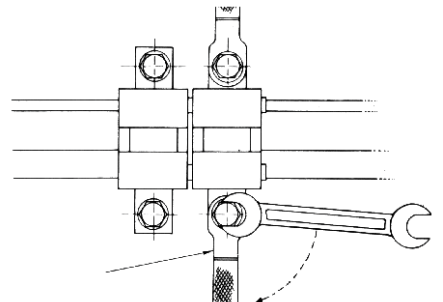

**CBB70 & CBB70LS**



38 x 92 mm  
47.3 mm / 54.5 mm

IEC	UL - CSA
6 - 70.0 mm <sup>2</sup>	8 - 2/0 AWG
6 - 70.0 mm <sup>2</sup>	8 - 2/0 AWG

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
192 A	175 A	175 A
6.0 Nm	54 lb-in	54 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CBB70	10
CBB70LS	10
PPCBB	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K16WHT	100
M8	

Uninsulated	Imax	Standard Pack
CBBPC1/70		10
CBBPC1/80		10
CTSPC2-1		10
CBBPC1/130		10
CBBPC1/160		10
CBBPC1/200		10
CBBPC1/250		10
CA791/2	192 A	10
CA791/3	192 A	10

**CBB95 & CBB95LS**



38 x 92 mm  
47.3 mm / 54.5 mm

IEC	UL - CSA
16 - 95.0 mm <sup>2</sup>	8 - 4/0 AWG
16 - 95.0 mm <sup>2</sup>	8 - 4/0 AWG

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
232 A	230 A	230 A
10.0 Nm	90 lb-in	90 lb-in




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CBB95	10
CBB95LS	10
PPCBB1	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K16WHT	100
M8	

Uninsulated	Imax	Standard Pack
CBBPC2/100		10
CBBPC2/160		10
CBBPC2/200		10
CBBPC2/250		10
CA791/2	232 A	10
CA791/3	232 A	10

**CBB120 & CBB120LS**

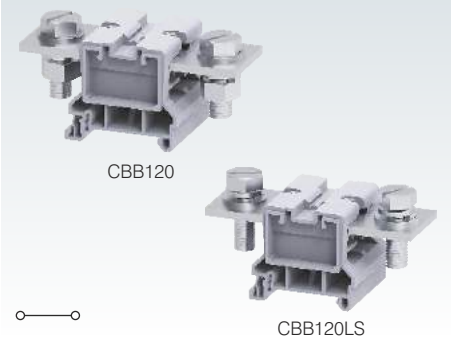

48 x 100 mm  
47.3 mm / 54.5 mm

IEC	UL - CSA
16 - 120.0 mm <sup>2</sup>	8 - 250 KCMIL
16 - 120.0 mm <sup>2</sup>	8 - 250 KCMIL

IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
269 A	255 A	255 A
10.0 Nm	90 lb-in	90 lb-in



Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CBB120	10
CBB120LS	10
PPCBB1	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K16WHT	100
M10	

Uninsulated	Imax	Standard Pack
CBBPC2/100		10
CBBPC2/160		10
CBBPC2/200		10
CBBPC2/250		10
CA793/2	269 A	10
CA793/3	269 A	10

# POWER TERMINAL BLOCKS

CBB series Terminal Blocks are preferred for application using wires of large cross section.

The Wire is crimped to a ring / fork lug and is screwed on to the flat current bar of the Terminal Block. Specially designed Mounting Feet holds the Terminal Block rigidly on to the Mounting Rail.

Two Lugs of the rated cross section can be connected to the Terminal Block, without sacrificing the safety of the Terminal Block.

PPCBB series partition plates can be installed even after assembly of cables on the Terminal Blocks.

Terminals with suffix LS have a standard slotted bolt assembled in the threaded bus bar. This enables faster wiring without the need of two wrenches / spanners. PTB series Terminal Blocks are preferred for application using wires of large cross section.

The Wire is crimped to a ring / fork lug and is screwed on to the flat current bar of the Terminal Block. Specially designed Mounting Feet holds the Terminal Block rigidly on to the Mounting Rail.

Two Lugs of the rated cross section can be connected to the Terminal Block, without sacrificing the safety of the Terminal Block.

In PTB35/50SH, PTB70/95SH Terminal Blocks a hinged protective cover makes the Terminal Block shock proof (finger safe) and has marker recess to accept marking tag.


The Terminal Blocks can be stacked together by pressing the adjacent Terminal Blocks firmly\*.

Adjacent terminals can be shorted by removing a thin wall partition and using 2 & 3 pole shorting system.

Optional Marker Holder MHPTB35 can be used for installing marking tags on the Terminal Blocks without protective covers.

<b>Width (Thickness) x Length</b>		48 x 110 mm
<b>Height with DIN 35 x 7.5 / 35 x 15 mm Rail</b>		47.3 mm / 54.5 mm
<b>Connection Possibility as per</b>		
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	
<b>Ratings As Per</b>		
<b>Voltage</b>	1000 V	600 V 600 V
<b>Current</b>	309 A	285 A 285 A
<b>Torque</b>	14.0 Nm	127 lb-in 127 lb-in
<b>Approvals</b>		
Insulation Material / Material Group		
Rated Impulse Voltage / Pollution Degree		

## CBB150 & CBB150LS

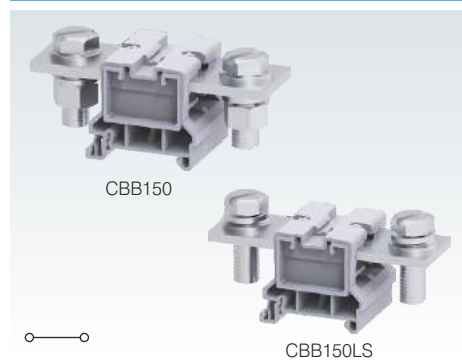

<b>IEC</b>	<b>UL - CSA</b>	
16 - 150.0 mm <sup>2</sup>	8 - 300 KCMIL	
16 - 150.0 mm <sup>2</sup>	8 - 300 KCMIL	
<b>IEC60947-1</b>	<b>UL-1059</b>	<b>CSA22.2-158</b>
1000 V	600 V	600 V
309 A	285 A	285 A
14.0 Nm	127 lb-in	127 lb-in
Insulation Material / Material Group		
Polyamide 6,6 / 1		
Rated Impulse Voltage / Pollution Degree		
8 KV / 3		

<b>Terminal Block</b>	With Nut & Bolt configuration With Threaded Current Bar
<b>Partition Plate / Protective Shroud</b>	PPCBB1
<b>Mounting Rail</b>	(Refer Pg. 219 for details)
<b>End Clamp</b>	(Refer Pg. 220 for details)
<b>Marking Tags</b>	(Refer Pg. 224 for details)
<b>Marker Holder</b>	MHPTB35
<b>Screw / Bolt Size</b>	M12


Type / Cat. No.	Standard Pack
CBB150	10
CBB150LS	10
PPCBB1	10
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	25 m
CA702 / CA802 / CA202	50
CA509/K16WHT	100
M12	

Shorting Links	
Protective Cover for installing on PPCBB & PPCBB1	100 mm 160 mm 200 mm 250 mm
Permanent Shorting Links	2 pole 3 pole


Uninsulated	Imax	Standard Pack
CBBPC2/100		10
CBBPC2/160		10
CBBPC2/200		10
CBBPC2/250		10
CA794/2	309 A	10
CA794/3	309 A	10

### Installation instruction:

It is recommended to provide a back support to the wire while tightening the clamping bolt to avoid deformation of the mounting rail or to prevent damage of the Terminal Block by torsional force.

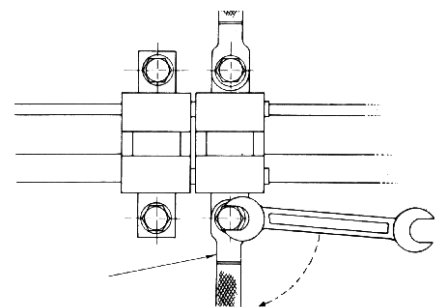

**CBB185 & CBB185LS**

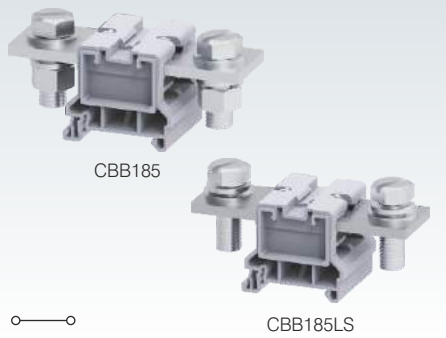

48 x 110 mm  
47.3 mm / 54.5 mm

IEC	UL - CSA
16 - 185.0 mm <sup>2</sup>	8 - 350 KCMIL
16 - 185.0 mm <sup>2</sup>	8 - 350 KCMIL


IEC60947-7-1	UL-1059	CSA22.2-158
1000 V	600 V	600 V
353 A	310 A	310 A
14.0 Nm	127 lb-in	127 lb-in



Polyamide 6,6 / 1

8 KV / 3

**PTB35/50**

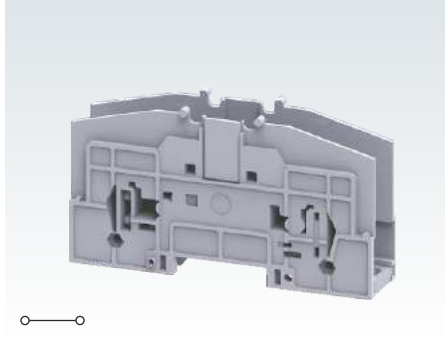

25 x 113 mm  
61.0 mm / 68.3 mm

IEC	UL - CSA
1.5 - 50.0 mm <sup>2</sup>	8 - 2 AWG
1.5 - 50.0 mm <sup>2</sup>	8 - 2 AWG


IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	1100 V
150 A	115 A	115 A	126 A
3.0 Nm	27 lb-in	27 lb-in	3.0 Nm



Polyamide 6,6 / 1

8 KV / 3

**PTB35/50SH**

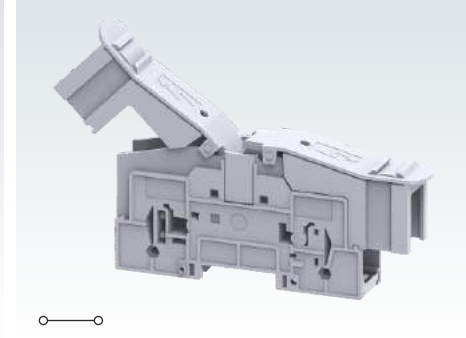

25 x 169 mm  
66.5 mm / 73.6 mm

IEC	UL - CSA
1.5 - 50.0 mm <sup>2</sup>	8 - 2 AWG
1.5 - 50.0 mm <sup>2</sup>	8 - 2 AWG

IEC60947-7-1	UL-1059	CSA22.2-158	IEC60079-7
1000 V	600 V	600 V	1100 V
150 A	115 A	115 A	126 A
3.0 Nm	27 lb-in	27 lb-in	3.0 Nm




Polyamide 6,6 / 1

8 KV / 3

Type / Cat. No.	Standard Pack	
CBB185	10	
CBB185LS	10	
PPCBB1	10	
CA701-1M / CA701-1M-S	50 m	
CA701-15-1M / CA701-15-1M-S	25 m	
CA702 / CA802 / CA202	50	
CA509/K16WHT	100	
M12		
Uninsulated	Imax	Standard Pack
CBBPC2/100		10
CBBPC2/160		10
CBBPC2/200		10
CBBPC2/250		10
CA794/2	353 A	10
CA794/3	353 A	10

Type / Cat. No.	Standard Pack	
PTB35/50	10	
PSPTB35/50	20	
CA701-1M / CA701-1M-S	50 m	
CA701-15-1M / CA701-15-1M-S	25 m	
CA202 / CA102	50	
CA509/K9WHT	100	
MHPTB35	10	
M6		
Uninsulated	Imax	Standard Pack
CA703/9	150 A	10
CA704/9	150 A	10


Type / Cat. No.	Standard Pack	
PTB35/50SH	10	
CA701-1M / CA701-1M-S	50 m	
CA701-15-1M / CA701-15-1M-S	25 m	
CA202 / CA102	50	
CA509/K9WHT	100	
MHPTB35	10	
M6		
Uninsulated	Imax	Standard Pack
CA703/9	150 A	10
CA704/9	150 A	10

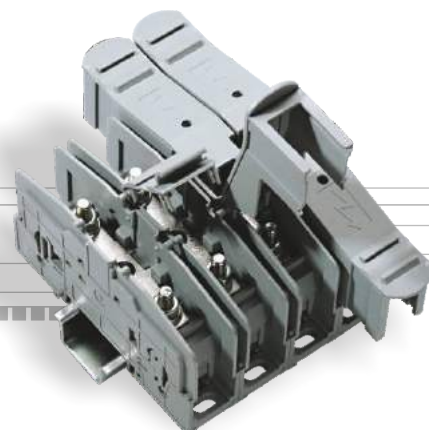




# POWER TERMINAL BLOCKS

## PTB70/95

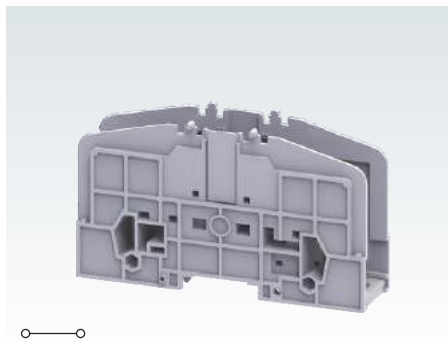

## PTB70/95SH

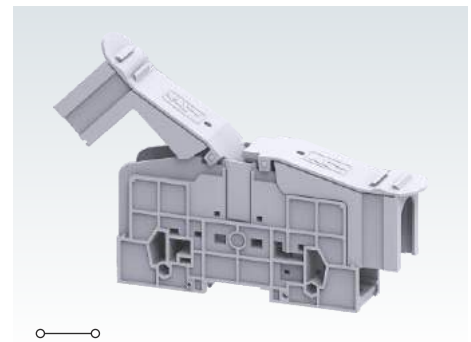

Width (Thickness) x Length	32 x 130 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	76.6 mm / 84.5 mm	
Connection Possibility as per	<b>IEC</b>	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 95.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 95.0 mm <sup>2</sup>
Ratings As Per	<b>UL - CSA</b>	
Voltage	1000 V	600 V
Current	232 A	230 A
Torque	10.0 Nm	87 lb-in
Approvals		
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

Width (Thickness) x Length	32 x 130 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	76.6 mm / 84.5 mm	
Connection Possibility as per	<b>UL - CSA</b>	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	8 - 4/0 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	8 - 4/0 AWG
Ratings As Per	<b>IEC</b>	
Voltage	1000 V	600 V
Current	232 A	230 A
Torque	10.0 Nm	87 lb-in
Approvals		
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	

Width (Thickness) x Length	32 x 192 mm	
Height with DIN 35 x 7.5 / 35 x 15 mm Rail	78.0 mm / 86.0 mm	
Connection Possibility as per	<b>IEC</b>	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 95.0 mm <sup>2</sup>
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 95.0 mm <sup>2</sup>
Ratings As Per	<b>UL - CSA</b>	
Voltage	1000 V	600 V
Current	232 A	230 A
Torque	10.0 Nm	87 lb-in
Approvals		
Insulation Material / Material Group	Polyamide 6,6 / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3	


Terminal Block	Grey	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	PTB70/95	10	
Protective Cover		PSPTB70/95	20	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m	
End Clamp (Refer Pg. 220 for details)		CA202 / CA102	50	
Marking Tags (Refer Pg. 224 for details)		CA509/K9WHT	100	
Marker Holder		MHPTB70	10	
Bolt Size		M8		
Shorting Links		Uninsulated	Imax	Standard Pack
Shorting System	2 pole	CA703/11	220 A	10
	3 pole	CA704/11	220 A	10

Terminal Block	Grey	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	PTB70/95	10	
Protective Cover		PSPTB70/95	20	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m	
End Clamp (Refer Pg. 220 for details)		CA202 / CA102	50	
Marking Tags (Refer Pg. 224 for details)		CA509/K9WHT	100	
Marker Holder		MHPTB70	10	
Bolt Size		M8		
Shorting Links		Uninsulated	Imax	Standard Pack
Shorting System	2 pole	CA703/11	220 A	10
	3 pole	CA704/11	220 A	10

Terminal Block	Grey	Type / Cat. No.	Standard Pack	
Terminal Block	Grey	PTB70/95SH	10	
Protective Cover		PSPTB70/95SH	20	
Mounting Rail (Refer Pg. 219 for details)		CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S	50 m 25 m	
End Clamp (Refer Pg. 220 for details)		CA202 / CA102	50	
Marking Tags (Refer Pg. 224 for details)		CA509/K9WHT	100	
Marker Holder		MHPTB70	10	
Bolt Size		M8		
Shorting Links		Uninsulated	Imax	Standard Pack
Shorting System	2 pole	CA703/11	220 A	10
	3 pole	CA704/11	220 A	10


\* M3 Screw of desired length with nut can be used optionally to secure the stack.

## PTB35 with optional MHPTB35

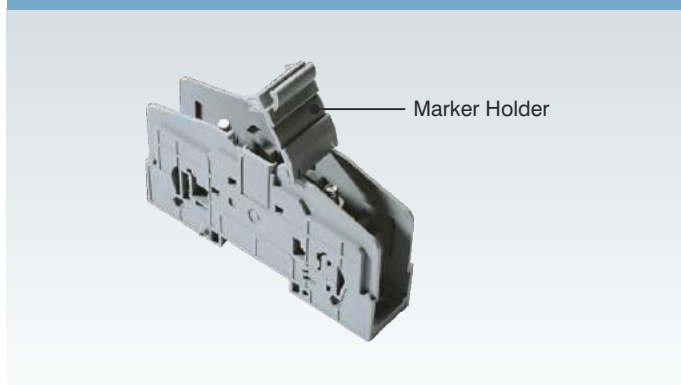

Marker Holder

## Panel Mounting Hole Details

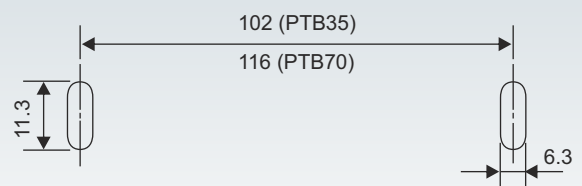


Dimension in mm


# MELAMINE TERMINAL BLOCKS

High Grade Melamine Terminal Blocks are suitable for applications involving high temperature. Connections can be made by simply stripping the wire of its insulation to the recommended length and clamping it without any additional preparation. In no instance does the clamping screw act directly on the wire and this effectively prevents damage to the wire.




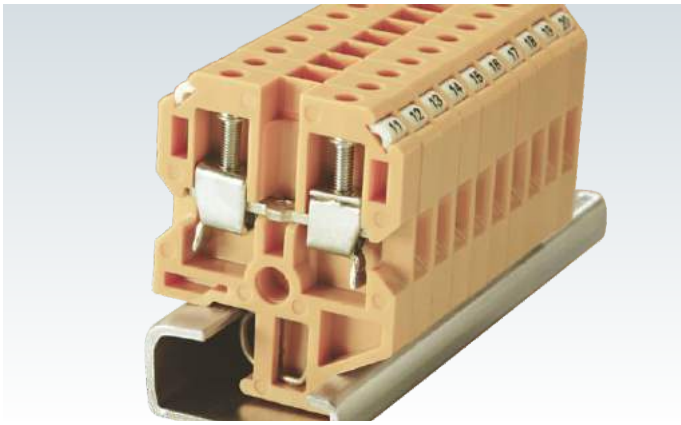


Screw Clamp Terminal Blocks with a high torque clamping system ensuring safe, gas tight connections. Cold forged, rolled threaded screws ensure highly reliable connections.

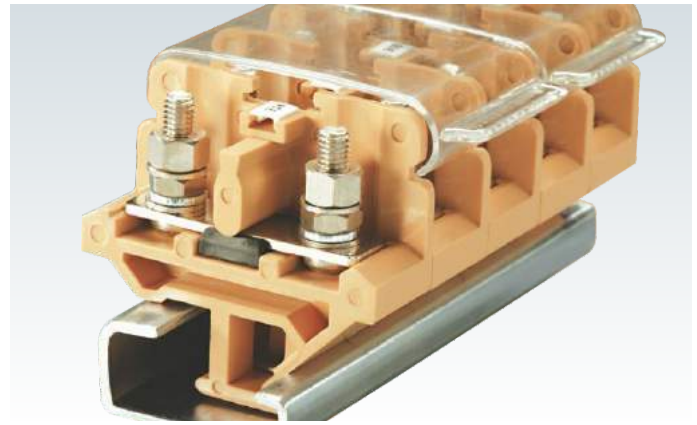


High Torque clamping system for ring & fork type lugs / ferrules. Extremely effective clamping system for areas prone to high vibrations.

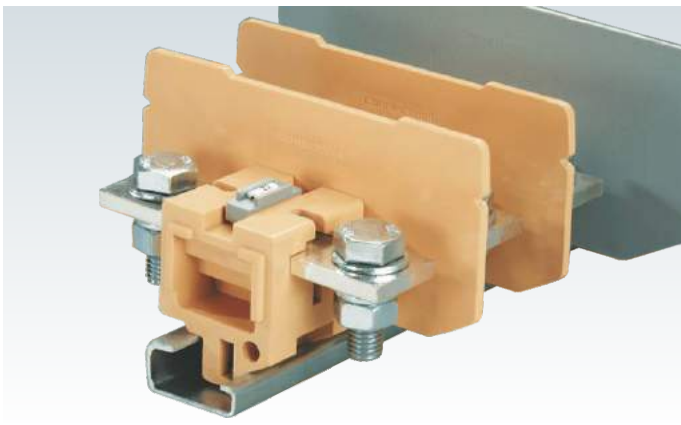


High current terminal blocks provide extremely reliable connection for higher size wires. Additional isolation plates are used to make these assemblies safe.

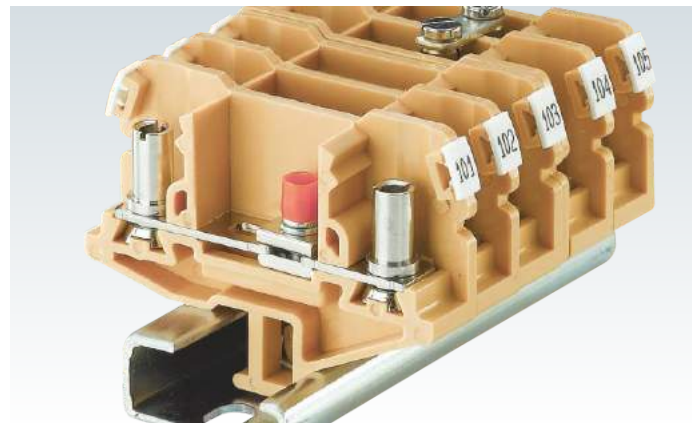

Disconnecting Terminal Block system is a versatile wire connection method for current transformer and power meters. A wide range of accessories eases the testing of these instruments.


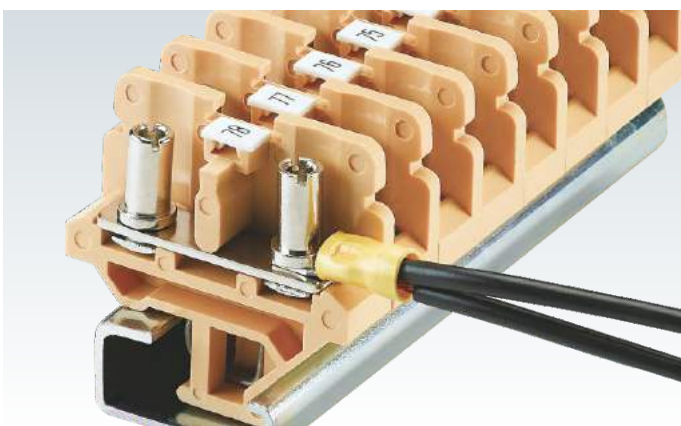


Commercially available ring or fork type lugs / ferrules can be used for terminating multiple wires. The bolt & nut system make these multi wire connections safe and secure.

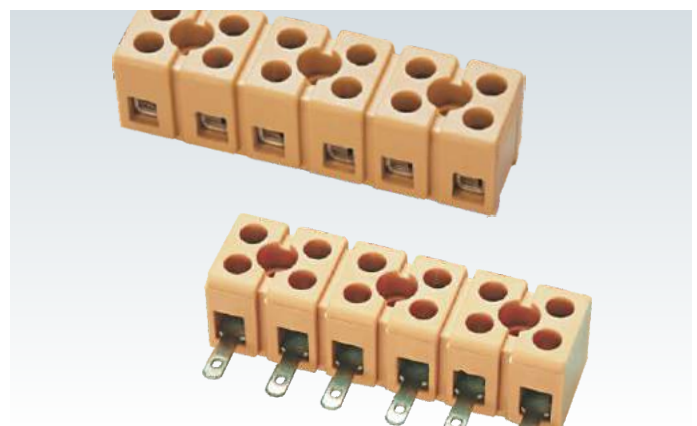

Strip type terminals are used for electric and electronic equipments and smaller junction boxes. They can be cut to different pole configurations.

## MELAMINE TERMINAL BLOCKS

**Feed Through****199 - 201****Stud Type****202 - 206****Disconnect & Test****207 - 208****Bus Bar****209 - 210****Spring Loaded****211 - 212****Multipole Strip****213 - 214****Ceramic Terminal****215 - 216**

# STANDARD FEED THROUGH TERMINAL BLOCKS

These Terminal Blocks are ideal choice for use in High Temperature applications. These Terminal Blocks can be mounted on a standard 'G' rail and are available for wire sizes from 0.2 to 35 sq.mm


These Terminal Blocks have marker holding recesses to accept marking tags for circuit identification. Cross connection can be achieved with the aid of shorting links / sleeves & screws. The specially designed 'Knock Out' at the center must be removed to facilitate permanent shorting.

Width (Thickness) x Length		6 x 36.5 mm	
Height with DIN 32 x 15 mm Rail		46.5 mm	
Connection Possibility as per		<b>IEC</b>	<b>UL - CSA</b>
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
	Solid	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	22 - 14 AWG
	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	22 - 16 AWG
Wire Stripping Length		9 mm	
Ratings As Per		IEC60947-7-1 CSA22.2-158	
Voltage		800 V	600 V
Current		24 A	25 A
Torque		0.4 Nm	7 lb-in
Approvals			
Insulation Material / Comparative Tracking Index		Melamine / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	
		<b>Type / Cat. No.</b>	<b>Standard Pack</b>
Terminal Block	Blue	CTS2.5M	200
	Red	CTS2.5MBU	200
	Yellow	CTS2.5MR	200
	Black	CTS2.5MY	200
	Black	CTS2.5MBK	200
End Plate		CTSEP01	50
Partition Plate		CTSP01	50
Mounting Rail (Refer Pg. 219 for details)		CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA502 / CA702	50
Marking Tags (Refer Pg. 224 for details)		CA509/K2WHT	100
Screw Driver		SCS0.5/3	Blade size: 0.5 x 3 mm 10



Shorting Links		Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links	2 pole	CA521/2	CA621/2	24 A	100
	3 pole	CA521/3	CA621/3	24 A	100
	4 pole	CA521/4	CA621/4	24 A	100
	10 pole	CA521/10	CA621/10	24 A	10
	Permanent Shorting Links	2 pole	CA503/01		24 A
	3 pole	CA504/01		24 A	100
	4 pole	CA505/01		24 A	100
	10 pole	CA510/10		24 A	100
Short Sleeve & Screw for Permanent Shorting Links		CA507/S/Q/01			50
Short Stud & Screw for permanent shorting		CA507/S/01			100
Switchable Shorting Links		CA506/01		24 A	100
Long Sleeve & Screw for Switchable Shorting Links		CA507/L/Q/01			100
Long Stud & Screw for temporary shorting		CA507/L/01			100
Test Socket		CA707/TS/04			100

**CTS2.5**



6.7 x 40 mm

52 mm

IEC	UL - CSA
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 6.0 mm <sup>2</sup>	
0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG

12 mm

IEC60947-7-1 CSA22.2-158

800 V	600 V		
32 A	40 A*		
0.5 Nm	7 lb-in		




Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS2.5	200
CTS2.5BU	200
CTS2.5R	200
CTS2.5Y	200
CTS2.5BK	200
CTSEP1	50
CTSP1L	50
CTSP1B	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2WHT	100
SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

**CTS6**



8 x 40 mm

52 mm

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG

10 mm

IEC60947-7-1 CSA22.2-158


1000 V	600 V		
41 A	50 A		
0.8 Nm	14 lb-in		



Melamine / 1

Type / Cat. No.	Standard Pack
CTS6	200
CTS6BU	200
CTS6R	200
CTS6Y	200
CTS6BK	200
CTSEP1	50
CTSP1L	50
CTSP1B	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

**CTS10**



10 x 40 mm

52 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG
1.5 - 10.0 mm <sup>2</sup>	
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 10 AWG

12 mm

IEC60947-7-1 CSA22.2-158

1000 V	600 V		
57 A	65 A		
1.2 Nm	14 lb-in		



Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS10	200
CTS10BU	200
CTS10R	200
CTS10Y	200
CTS10BK	200
CTSEP1	50
CTSP1L	50
CTSP1B	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA522/2	CA622/2	32 A	100
CA522/3	CA622/3	32 A	100
CA522/4	CA622/4	32 A	100
CA522/10	CA622/10	32 A	10
CA503/1		32 A	100
CA504/1		32 A	100
CA505/1		32 A	100
CA510/1		32 A	100
CA507/S/Q/01			50
CA507/S/01			100
CA506/01		24 A	100
CA507/L/Q/01			100
CA507/L/01			100
CA707/TS/04			100


Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA723/2	CA743/2	41 A	100
CA723/3	CA743/3	41 A	100
CA723/4	CA743/4	41 A	100
CA723/10	CA743/10	41 A	10
CA703/2		41 A	100
CA704/2		41 A	100
CA705/2		41 A	100
CA733/10		41 A	100
CA707/S/Q/1			100
CA507/S/1			100
CA706/2		41 A	100
CA707/L/Q/1			100
CA507/L/1			100
CA707/TS/05			100

Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
CA724/2	CA744/2	57 A	100
CA724/3	CA744/3	57 A	100
CA724/4	CA744/4	57 A	100
CA724/10	CA744/10	57 A	10
CA703/3		57 A	100
CA704/3		57 A	100
CA705/3		57 A	100
CA734/10		57 A	100
CA707/S/Q/1			100
CA507/S/2			100
CA706/3		24 A	100
CA707/L/Q/1			100
CA507/L/2			100
CA707/TS/05			100


\* 40 Amp with two 12 AWG wires  
35 Amp with one 10 AWG wire

# STANDARD FEED THROUGH TERMINAL BLOCKS

## CTS16

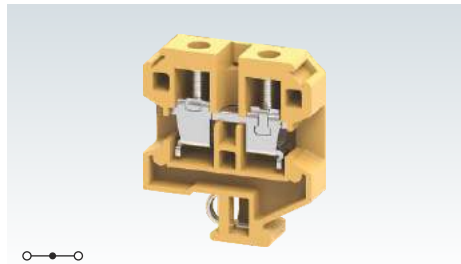

## CTS35

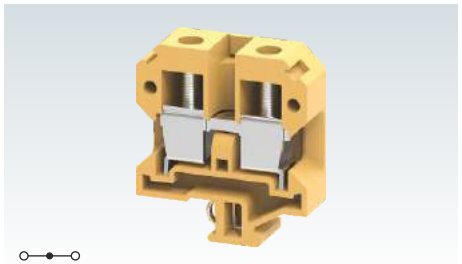

Width (Thickness) x Length	12 x 50 mm				18 x 58 mm			
Height with DIN 32 x 15 mm Rail	57.5 mm				66.8 mm			
Connection Possibility as per	IEC	UL - CSA		IEC	UL - CSA			
		With 1 Conductor per clamp	Stranded / Flexible		6.0 - 16.0 mm <sup>2</sup>	20 - 4 AWG		
		with Ferrule / Lug						
With 2 same size Conductors per clamp	IEC	UL - CSA		IEC	UL - CSA			
		Stranded / Flexible	6.0 - 10.0 mm <sup>2</sup>		20 - 8 AWG	10.0 - 16.0 mm <sup>2</sup>		
		with TWIN Ferrule / Lug						
Wire Stripping Length	14 mm				20 mm			
Ratings As Per	IEC60947-7-1 CSA22.2-158				IEC60947-7-1 CSA22.2-158			
Voltage	1000 V	600 V		1100 V	600 V			
	Current	76 A	85 A	125 A	145 A			
Torque	1.2 Nm	14 lb-in		2.5 Nm	25 lb-in			
	Approvals				Approvals			
Insulation Material / Comparative Tracking Index	Melamine / 1				Melamine / 1			
Rated Impulse Voltage / Pollution Degree	8 KV / 3				8 KV / 3			

	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	CTS16	100	CTS35	50
	Blue CTS16BU	100	CTS35BU	50
	Red CTS16R	100	CTS35R	50
	Yellow CTS16Y	100	CTS35Y	50
	Black CTS16BK	100	CTS35BK	50
End Plate	CTSEP2	50	CTSEP3	25
Partition Plate	CTSP2	50	CTSP3	25
Mounting Rail (Refer Pg. 219 for details)	CA501-1M / CA501-1M-S	25 m	CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA502 / CA702	50	CA502 / CA702	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2WHT	100	CA509/K2WHT	100
Screw Driver	SCS0.8/4 Blade size: 0.8 x 4 mm	10	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack	Uninsulated	Insulated	I <sub>max</sub>	Standard Pack
Pre Assembled Shorting Links	2 pole	CA751/2	CA761/2	65 A	50			
	3 pole	CA751/3	CA761/3	65 A	50			
	4 pole	CA751/4	CA761/4	65 A	50			
	10 pole	CA751/10	CA761/10	65 A	10			
Permanent Shorting Links	2 pole	CA703/8		65 A	100	CA503/5	125 A	100
	3 pole	CA704/8		65 A	100	CA504/5	125 A	100
	4 pole	CA705/8		65 A	100	CA505/5	125 A	100
	10 pole	CA739/10		65 A	100	CA510/5	125 A	100
Short Sleeve & Screw for Permanent Shorting Links	CA507/S/Q1			100	CA508/S/Q		100	
Short Stud & Screw for permanent shorting	CA507/S/2			100	CA508/S		100	
Switchable Shorting Links	CA706/8		65 A	100	CA506/5	125 A	100	
Long Sleeve & Screw for Switchable Shorting Links	CA707/L/Q1			100	CA508/L/Q		100	
Long Stud & Screw for temporary shorting	CA507/L/2			100	CA508/L		100	
Test Socket	CA707/TS/05			100	CA707/TS/06		100	

# STUD TYPE TERMINAL BLOCKS


These Terminal Blocks are preferred for applications where the connections are subjected to severe vibrations.

The wire is crimped to a ring / fork type lug (ferrule) and is screwed on to the flat current bar on the Terminal Block. The range includes Terminal Blocks for wire sizes from 0.25 to 35sq.mm.

Cross connection can be achieved with the aid of external shorting links.

It is recommended to use Protective Covers in transparent plastic to fully shroud these assemblies.

## CSTSB3

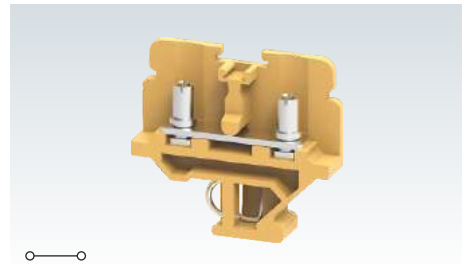

Width (Thickness) x Length	10 x 50 mm		
Height with DIN 32 x 15 mm Rail	47.5 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 6.0 mm <sup>2</sup>	22 - 10 AWG
	Solid with Ferrule / Lug	1.5 - 6.0 mm <sup>2</sup>	
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	9 mm		
Ratings As Per	IEC60947-7-1 CSA22.2-158		
Voltage	1100 V	600 V	
Current	41 A	35 A	
Torque	0.5 Nm	7 lb-in	
Approvals			
Insulation Material / Comparative Tracking Index	Melamine / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		


	Type / Cat. No.	Standard Pack
Terminal Block	CSTSB3	100
	CSTSB3BU	100
	CSTSB3R	100
	CSTSB3Y	100
	CSTSB3BK	100
End Plate	CSTSEP2	50
Partition Plate	CSTSPPP	50
Mounting Rail (Refer Pg. 219 for details)	CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA502 / CA702	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2B4WHT	100
Screw Driver	SCS0.8/4 Blade size: 0.8 x 4 mm	10
Stud Size		

Shorting Links			Type / Cat. No.	I <sub>max</sub>	Standard Pack
Fork Type Shorting Links		2 pole	CA512/5-2	32 A	100
		3 pole	CA512/5-3	32 A	50
		4 pole	CA512/5-4	32 A	50
Insulated Fork Type Shorting Links		2 pole	CA514/5-2	32 A	100
		3 pole	CA514/5-3	32 A	50
		4 pole	CA514/5-4	32 A	50
Ring Type Shorting Links		2 pole	CA512/6-2	32 A	100
		3 pole	CA512/6-3	32 A	50
		4 pole	CA512/6-4	32 A	50
Insulated Ring Type Shorting Links		2 pole	CA514/6-2	32 A	100
		3 pole	CA514/6-3	32 A	50
		4 pole	CA514/6-4	32 A	50
Protective Cover for covering		2 Terminal	CSTSPC3		100
		3 Terminal	CSTSPC3-1		100
Protective Cover in Length		100 mm	CSTSPC1-2		10
		200 mm	CSTSPC1-3		10
		300 mm	CSTSPC1-4		10




# STUD TYPE TERMINAL BLOCKS

## CSTSB4/N4



## CSTSB5




Width (Thickness) x Length	13 x 45.0 mm		13 x 50 mm	
Height with DIN 32 x 15 mm Rail	45.0 mm		47.5 mm	
Connection Possibility as per	IEC	UL - CSA	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG	1.5 - 16.0 mm <sup>2</sup>
	Solid with Ferrule / Lug			22 - 4 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG	1.5 - 6.0 mm <sup>2</sup>
				22 - 8 AWG
Wire Stripping Length	12 mm		12 mm	
Ratings As Per	IEC60947-7-1		IEC60947-7-1 CSA22.2-158	
Voltage	1100 V		1000 V	600 V
Current	57 A		76 A	80 A
Torque	1.2 Nm		2.0 Nm	25 lb-in
Approvals	CE		IECEE CE C-SP US	
Insulation Material / Comparative Tracking Index	Melamine / 1		Melamine / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3		8 KV / 3	

	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	CSTSB4/N4	100	CSTSB5	100
	Blue CSTSB4/N4BU	100	CSTSB5BU	100
	Red CSTSB4/N4R	100	CSTSB5R	100
	Yellow CSTSB4/N4Y	100	CSTSB5Y	100
	Black CSTSB4/N4BK	100	CSTSB5BK	100
End Plate	EPCSTSB4/N4	50	CSTSEP2	50
Partition Plate			CSTSPPP	50
Mounting Rail (Refer Pg. 219 for details)	CA501-1M / CA501-1M-S	25 m	CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA502 / CA702	50	CA502 / CA702	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2B4WHT	100	CA509/K2B4WHT	100
Screw Driver	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10
Stud Size	M4			

Shorting Links			Type / Cat. No.	I <sub>max</sub>	Standard Pack	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Fork Type Shorting Links		2 pole	CA512/2-2	45 A	100	CA512/2-2	45 A	100
		3 pole	CA512/2-3	45 A	50	CA512/2-3	45 A	50
		4 pole	CA512/2-4	45 A	50	CA512/2-4	45 A	50
Insulated Fork Type Shorting Links		2 pole	CA514/2-2	45 A	100	CA514/2-2	45 A	100
		3 pole	CA514/2-3	45 A	50	CA514/2-3	45 A	50
		4 pole	CA514/2-4	45 A	50	CA514/2-4	45 A	50
Ring Type Shorting Links		2 pole	CA512/4-2	45 A	100	CA512/4-2	45 A	100
		3 pole	CA512/4-3	45 A	50	CA512/4-3	45 A	50
		4 pole	CA512/4-4	45 A	50	CA512/4-4	45 A	50
Insulated Ring Type Shorting Links		2 pole	CA514/4-2	45 A	100	CA514/4-2	45 A	100
		3 pole	CA514/4-3	45 A	50	CA514/4-3	45 A	50
		4 pole	CA514/4-4	45 A	50	CA514/4-4	45 A	50
Protective Cover for covering		2 Terminal				CSTSPC2		100
		3 Terminal				CSTSPC2-1		100
Protective Cover in Length		100 mm	CSTSPC1-5		10	CSTSPC1-2		10
		200 mm	CSTSPC1-6		10	CSTSPC1-3		10
		300 mm	CSTSPC1-7		10	CSTSPC1-4		10

**CSTSN4**



17 x 50 mm

47.5 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG

1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
---------------------------	------------

12 mm

IEC60947-7-1 CSA22.2-158

1100 V	600 V		
57 A	65 A		
1.2 Nm	14 lb-in		




Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CSTSN4	100
CSTSN4BU	100
CSTSN4R	100
CSTSN4Y	100
CSTSN4BK	100
CSTSEP2	50
CSTSP	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2B4WHT	100

**CSTSN415**



15 x 50 mm

47.5 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG

1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
---------------------------	------------

12 mm

IEC60947-7-1 CSA22.2-158

1000 V	600 V		
57 A	65 A		
1.2 Nm	14 lb-in		



Melamine / 1

8 KV / 3


Type / Cat. No.	Standard Pack
CSTSN415	100
CSTSN415BU	100
CSTSN415R	100
CSTSN415Y	100
CSTSN415BK	100
CSTSEP2	50
CSTSP	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2B4WHT	100

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA512/1-2	45 A	100
CA512/1-3	45 A	50
CA512/1-4	45 A	50
CA514/1-2	45 A	100
CA514/1-3	45 A	50
CA514/1-4	45 A	50
CA512/3-2	45 A	100
CA512/3-3	45 A	50
CA512/3-4	45 A	50
CA514/3-2	45 A	100
CA514/3-3	45 A	50
CA514/3-4	45 A	50
CSTSPC1		100
CSTSPC1-1		100
CSTSPC1-2		10
CSTSPC1-3		10
CSTSPC1-4		10


Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA512/9-2	45 A	100
CA512/9-3	45 A	50
CA512/9-4	45 A	50
CA514/9-2	45 A	100
CA514/9-3	45 A	50
CA514/9-4	45 A	50
CA512/10-2	45 A	100
CA512/10-3	45 A	50
CA512/10-4	45 A	50
CA514/10-2	45 A	100
CA514/10-3	45 A	50
CA514/10-4	45 A	50
CSTSPC1		100
CSTSPC1-1		100
CSTSPC1-2		10
CSTSPC1-3		10
CSTSPC1-4		10

# STUD TYPE TERMINAL BLOCKS

## CSTSN5



## CSTSN515



Width (Thickness) x Length	17 x 50 mm		15 x 50 mm	
Height with DIN 32 x 15 mm Rail	47.5 mm		47.5 mm	
Connection Possibility as per	IEC	UL - CSA	IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 16.0 mm <sup>2</sup>	22 - 4 AWG	1.5 - 16.0 mm <sup>2</sup>
	Solid with Ferrule / Lug			22 - 4 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG	1.5 - 6.0 mm <sup>2</sup>
Wire Stripping Length	12 mm		12 mm	
Ratings As Per	IEC60947-7-1 CSA22.2-158		IEC60947-7-1 CSA22.2-158	
Voltage	1100 V	600 V	1000 V	600 V
Current	76 A	80 A	76 A	80 A
Torque	2.0 Nm	25 lb-in	2.0 Nm	25 lb-in
Approvals				
Insulation Material / Comparative Tracking Index	Melamine / 1		Melamine / 1	
Rated Impulse Voltage / Pollution Degree	8 KV / 3		8 KV / 3	

	Type / Cat. No.	Standard Pack	Type / Cat. No.	Standard Pack
Terminal Block	CSTSN5	100	CSTSN515	100
	Blue CSTSN5BU	100	CSTSN515BU	100
	Red CSTSN5R	100	CSTSN515R	100
	Yellow CSTSN5Y	100	CSTSN515Y	100
	Black CSTSN5BK	100	CSTSN515BK	100
End Plate	CSTSEP2	50	CSTSEP2	50
Partition Plate	CSTSP	50	CSTSP	50
Mounting Rail (Refer Pg. 219 for details)	CA501-1M / CA501-1M-S	25 m	CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA502 / CA702	50	CA502 / CA702	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2B4WHT	100	CA509/K2B4WHT	100
Stud Size	M5		M5	
Marker Mounting Carrier				

	Type / Cat. No.	I <sub>max</sub>	Standard Pack	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Fork Type Shorting Links	2 pole	45 A	100	CA512/9-2	45 A	100
	3 pole	45 A	50	CA512/9-3	45 A	50
	4 pole	45 A	50	CA512/9-4	45 A	50
Insulated Fork Type Shorting Links	2 pole	45 A	100	CA514/9-2	45 A	100
	3 pole	45 A	50	CA514/9-3	45 A	50
	4 pole	45 A	50	CA514/9-4	45 A	50
Ring Type Shorting Links	2 pole	45 A	100	CA512/10-2	45 A	100
	3 pole	45 A	50	CA512/10-3	45 A	50
	4 pole	45 A	50	CA512/10-4	45 A	50
Insulated Ring Type Shorting Links	2 pole	45 A	100	CA514/10-2	45 A	100
	3 pole	45 A	50	CA514/10-3	45 A	50
	4 pole	45 A	50	CA514/10-4	45 A	50
Protective Cover for covering	2 Terminal		100	CSTSPC4		100
	3 Terminal		100	CSTSPC4-1		100
Protective Cover in Length	90 mm			CSTSPC1-2		10
	100 mm					
	150 mm			CSTSPC1-3		10
	200 mm			CSTSPC1-4		10
Protective Cover Holder	300 mm			CSP1		100



# DISCONNECT & TEST TERMINAL BLOCKS

These blocks are used for measuring, control, regulatory circuits and for current transformer connection application. They provide a clear functional advantage for devices having utility instruments and associated transformers.


In CMDT4 terminal the disconnection of circuit is achieved by means of a central sliding link assembly with a clear orange indicator.

In the CMDT4S Terminal Block the orange indicator is replaced by a socket headed screw for achieving the circuit disconnection.

Cross connection is possible with the aid of external shorting links.

Barrel nuts provide test sockets for inserting test plugs and for carrying out current and voltage injection protocols.

## CMDT4

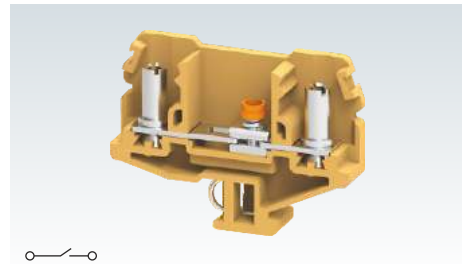


Width (Thickness) x Length	13 x 68 mm		
Height with DIN 32 x 15 mm Rail	51.7 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
With 2 same size Conductors per clamp	Solid with Ferrule / Lug	1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
Wire Stripping Length	12 mm		
Ratings As Per	IEC60947-7-1		
Voltage	1100 V		
Current	41 A		
Torque	1.2 Nm		
Approvals			
Insulation Material / Comparative Tracking Index	Melamine / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		

	Type / Cat. No.	Standard Pack
Terminal Block	CMDT4	50
	CMDT4BU	50
	CMDT4R	50
	CMDT4Y	50
	CMDT4BK	50
	EPCMDT4	50
End Plate	EPCMDT4	50
Mounting Rail (Refer Pg. 219 for details)	CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA502 / CA702	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2B4WHT	100
Screw Driver	SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

Shorting Links			Type / Cat. No.	I <sub>max</sub>	Standard Pack
Fork Type Shorting Links	2 pole	CA512/2-2	41 A	100	
	3 pole	CA512/2-3	41 A	50	
	4 pole	CA512/2-4	41 A	50	
Insulated Fork Type Shorting Links	2 pole	CA514/2-2	41 A	100	
	3 pole	CA514/2-3	41 A	50	
	4 pole	CA514/2-4	41 A	50	
Ring Type Shorting Links	2 pole	CA512/4-2	41 A	100	
	3 pole	CA512/4-3	41 A	50	
	4 pole	CA512/4-4	41 A	50	
Insulated Ring Type Shorting Links	2 pole	CA514/4-2	41 A	100	
	3 pole	CA514/4-3	41 A	50	
	4 pole	CA514/4-4	41 A	50	
Protective Cover for covering	2 Terminal	CDTPC1		100	
	3 Terminal	CDTPC2		100	
Protective Cover in Length	100 mm	CDTPC3		10	
	200 mm	CDTPC4		10	
	300 mm	CDTPC5		10	

### CMDT4S



13 x 68 mm

51.7 mm

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG

1.5 - 6.0 mm<sup>2</sup>      22 - 8 AWG

12 mm

IEC60947-7-1

1100 V

41 A

1.2 Nm




Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CMDT4S	50
EPCMDT4	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2B4WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA512/2-2	41 A	100
CA512/2-3	41 A	50
CA512/2-4	41 A	50
CA514/2-2	41 A	100
CA514/2-3	41 A	50
CA514/2-4	41 A	50
CA512/4-2	41 A	100
CA512/4-3	41 A	50
CA512/4-4	41 A	50
CA514/4-2	41 A	100
CA514/4-3	41 A	50
CA514/4-4	41 A	50
CDTPC1		100
CDTPC2		100
CDTPC3		10
CDTPC4		10
CDTPC5		10

### CMDT4SH



26 x 68 mm

51.7 mm

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG

1.5 - 6.0 mm<sup>2</sup>      22 - 8 AWG

12 mm

IEC60947-7-1

500 V

32 A

1.2 Nm




Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CMDT4SH	25
CMDT4SHBU	25
CMDT4SHR	25
CMDT4SHY	25
CMDT4SHBK	25
EPCMDT4	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2B4WHT	100
SCS1.0/5.5 Blade size: 1.0 x 5.5 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA512/2-2	32 A	100
CA512/2-3	32 A	50
CA512/2-4	32 A	50
CA514/2-2	32 A	100
CA514/2-3	32 A	50
CA514/2-4	32 A	50
CA512/4-2	32 A	100
CA512/4-3	32 A	50
CA512/4-4	32 A	50
CA514/4-2	32 A	100
CA514/4-3	32 A	50
CA514/4-4	32 A	50

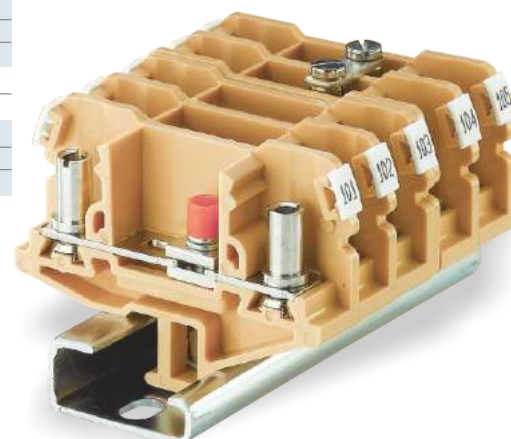


# BUS BAR TYPE TERMINAL BLOCKS

These Terminal Blocks are preferred for applications using wires of a large cross section. The wire is crimped to a ring / fork type lug (ferrule) and is screwed on to the flat current bar on the Terminal Block. The range includes Terminal Blocks for wire sizes from 16 sq.mm to 120 sq.mm. CTS35LS Terminal Blocks have a threading in the current bar, eliminating the need of locking nuts.

Partition / Isolation Plate must be used with every Terminal Block. The Protective Cover is designed to be mounted on a specially designed slot in the Partition Plate.

### Installation instruction:

It is recommended to provide a back support to the wire while tightening the clamping bolt to avoid deformation of the mounting rail or to prevent damage of the Terminal Block by torsional force.

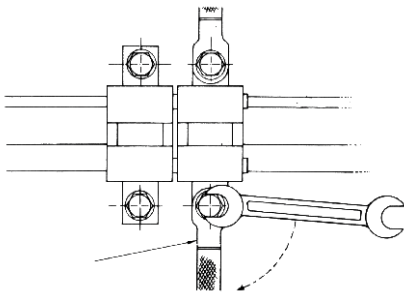


Width (Thickness) x Length		28 x 75 mm	
Height with DIN 32 x 15 mm Rail		55.2 mm	
Connection Possibility as per		IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	16.0 - 50.0 mm <sup>2</sup>	8 - 2 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	16.0 - 50.0 mm <sup>2</sup>	8 - 2 AWG
Wire Stripping Length		12 mm	
Ratings As Per		IEC60947-7-1 CSA22.2-158	
Voltage		1000 V	600 V
Current		150 A	145 A
Torque		3.0 Nm	27 lb-in
Approvals			
Insulation Material / Comparative Tracking Index		Melamine / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	
		<b>Type / Cat. No.</b>	<b>Standard Pack</b>
Terminal Block	With Nut & Bolt configuration With Threaded Current Bar	CTS35L CTS35LS	10 10
Partition / Isolation Plate (Polyamide 66)		EP4P	10
Partition / Isolation Plate (Melamine)		CTSEP4	10
Locating Support for Partition / Isolation Plate		CTSEP4LO	10
Mounting Rail (Refer Pg. 219 for details)		CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA502 / CA702 / CA102	50
Marking Tags (Refer Pg. 224 for details)		CA509/K2B4WHT	100
Bolt Size		M6	
<b>Shorting Links</b>		<b>Type / Cat. No.</b>	<b>I<sub>max</sub></b>
Shorting Links		CA796/2 CA796/3	125 A 125 A
Protective Cover in Length		<b>Mounted on</b>	
		CTSPC3-2	EP4P
		CTSPC2-1	CTSEP4
		CTSPC2-2	CTSEP4

## CTS35L / CTS35LS



Width (Thickness) x Length		28 x 75 mm	
Height with DIN 32 x 15 mm Rail		55.2 mm	
Connection Possibility as per		IEC	UL - CSA
With 1 Conductor per clamp	Stranded / Flexible with Ferrule / Lug	16.0 - 50.0 mm <sup>2</sup>	8 - 2 AWG
With 2 same size Conductors per clamp	Stranded / Flexible with Ferrule / Lug	16.0 - 50.0 mm <sup>2</sup>	8 - 2 AWG
Wire Stripping Length		12 mm	
Ratings As Per		IEC60947-7-1 CSA22.2-158	
Voltage		1000 V	600 V
Current		150 A	145 A
Torque		3.0 Nm	27 lb-in
Approvals			
Insulation Material / Comparative Tracking Index		Melamine / 1	
Rated Impulse Voltage / Pollution Degree		8 KV / 3	
		<b>Type / Cat. No.</b>	<b>Standard Pack</b>
Terminal Block	With Nut & Bolt configuration With Threaded Current Bar	CTS35L CTS35LS	10 10
Partition / Isolation Plate (Polyamide 66)		EP4P	10
Partition / Isolation Plate (Melamine)		CTSEP4	10
Locating Support for Partition / Isolation Plate		CTSEP4LO	10
Mounting Rail (Refer Pg. 219 for details)		CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)		CA502 / CA702 / CA102	50
Marking Tags (Refer Pg. 224 for details)		CA509/K2B4WHT	100
Bolt Size		M6	
<b>Shorting Links</b>		<b>Type / Cat. No.</b>	<b>I<sub>max</sub></b>
Shorting Links		CA796/2 CA796/3	125 A 125 A
Protective Cover in Length		<b>Mounted on</b>	
		CTSPC3-2	EP4P
		CTSPC2-1	CTSEP4
		CTSPC2-2	CTSEP4

**CTS70L / CTS70LS**

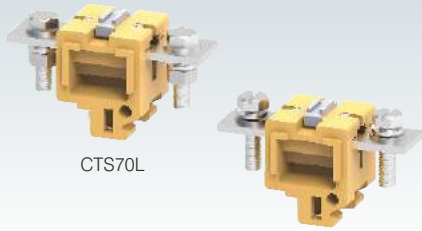

CTS70L

CTS70LS



40 x 92 mm

55.2 mm

IEC **UL - CSA**

35.0 - 70.0 mm<sup>2</sup> 8 - 2/0 AWG

35.0 - 70.0 mm<sup>2</sup> 8 - 2/0 AWG

18 mm

IEC60947-7-1 CSA22.2-158

1000 V 600 V

192 A 250 A

10.0 Nm 87 lb-in



Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS70L	10
CTS70LS	10
EP4P	10
CTSEP4	10
CTSEP4LO	10
CA501-1M / CA501-1M-S	25 m
CA502 / CA702 / CA102	50
CA509/K2B4WHT	100
M8	

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA797/2	185 A	10
CA797/3	185 A	10
<b>Mounted on</b>		
CTSPC3-2	EP4P	10
CTSPC2-1	CTSEP4	10
CTSPC2-2	CTSEP4	10

**CTS95L / CTS95LS**



CTS95L

CTS95LS



40 x 92 mm

55.2 mm

IEC **UL - CSA**

35.0 - 95.0 mm<sup>2</sup> 8 - 4/0 AWG

35.0 - 95.0 mm<sup>2</sup> 8 - 4/0 AWG

20 mm

IEC60947-7-1 CSA22.2-158

1000 V 600 V

232 A 300 A

10.0 Nm 87 lb-in




Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS95L	10
CTS95LS	10
EP4P	10
CA501-1M / CA501-1M-S	25 m
CA502 / CA702 / CA102	50
CA509/K2B4WHT	100
M10	

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA798/2	220 A	10
CA798/3	220 A	10
<b>Mounted on</b>		
CTSPC3-1	EP4P	10
CTSPC2-3	CTSEP4	10

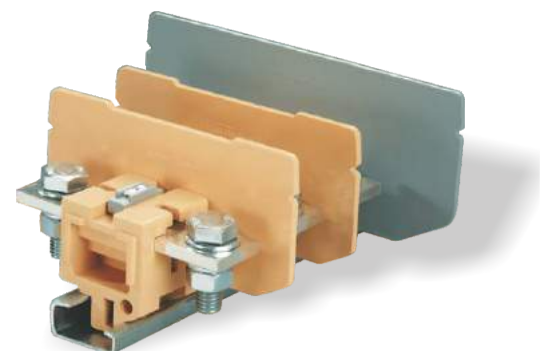




# SPRING LOADED TERMINAL BLOCKS

These modified version of feed through Terminal Blocks come with safety springs. These Terminal Blocks are preferred for connections that involve safety requirements of the Electric Supply Industry (ESI) standards, British CEBG regulations and NTPC applications. In addition to the high torque screws, these blocks have a built-in spring loading feature. It is recommended to use hook type lugs for terminating wires in such connections. These Terminal Blocks have a specially designed current bar for the right location/ placement of wires with hook type lugs, thus preventing loosening of the wires even when the screw clamps are not tightened.

The housing of these Terminal Blocks is made of High Grade Melamine which has insulation properties in accordance with the CEBG regulations.


Width (Thickness) x Length	6.7 x 40 mm		
Height with DIN 32 x 15 mm Rail	52.0 mm		
Connection Possibility as per	IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	Solid with Ferrule / Lug	0.2 - 6.0 mm <sup>2</sup>	22 - 10 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG
	with TWIN Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 12 AWG
Wire Stripping Length	12 mm		
Ratings As Per	IEC60947-7-1 CSA22.2-158		
Voltage	600 V	300 V	
Current	32 A	35 A	
Torque	0.5 Nm	7 lb-in	
Approvals			
Insulation Material / Comparative Tracking Index	Melamine / 1		
Rated Impulse Voltage / Pollution Degree	8 KV / 3		



	Type / Cat. No.	Standard Pack
Terminal Block	CTS4SC	200
End Plate	CTSEP1	50
Partition Plate	CTSP1L CTSP1B	50 50
Mounting Rail (Refer Pg. 219 for details)	CA501-1M / CA501-1M-S	25 m
End Clamp (Refer Pg. 220 for details)	CA502 / CA702	50
Marking Tags (Refer Pg. 224 for details)	CA509/K2WHT	100
Screw Driver	SCS0.6/3.5 Blade size: 0.6 x 3.5 mm	10

	Type / Cat. No.	I <sub>max</sub>	Standard Pack
Hook Type Lugs	1.5 sq.mm	CA604/1	100
	2.5 sq.mm	CA604/2	100
	6 sq.mm		
Pre Assembled Shorting Links	2 pole	CA522/2	32 A 100
	3 pole	CA522/3	32 A 100
	4 pole	CA522/4	32 A 100
	10 pole	CA522/10	32 A 10
Insulated Pre Assembled Shorting Link	2 pole	CA622/2	32 A 100
	3 pole	CA622/3	32 A 100
	4 pole	CA622/4	32 A 100
	10 pole	CA622/10	32 A 10
Permanent Shorting Links	2 pole	CA503/1	32 A 100
	3 pole	CA504/1	32 A 100
	4 pole	CA505/1	32 A 100
	10 pole	CA510/1	32 A 100
Short Sleeve & Screw for Permanent Shorting Links	CA507/S/Q/1		100
Switchable Shorting Links	CA506/1	32 A	100
Long Sleeve & Screw for Switchable Shorting Links	CA707/L/Q/1		100

**CTS6SC**



8 x 40 mm

52.0 mm

IEC	UL - CSA
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
1.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG

12 mm

IEC60947-7-1 CSA22.2-158

600 V	300 V		
41 A	50 A		
0.8 Nm	14 lb-in		




Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS6SC	200
CTSEP1	50
CTSP1L	50
CTSP1B	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA604/1		100
CA604/2		100
CA604/3		100
CA723/2	41 A	100
CA723/3	41 A	50
CA723/4	41 A	50
CA723/10	41 A	10
CA743/2	41 A	100
CA743/3	41 A	50
CA743/4	41 A	50
CA743/10	41 A	10
CA703/2	41 A	100
CA704/2	41 A	100
CA705/2	41 A	100
CA733/10	41 A	100
CA707/S/Q/1		100
CA706/2	41 A	100
CA707/L/Q/1		100

**CTS10SC**



11 x 50 mm

59.5 mm

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 10.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 10 AWG

12 mm

IEC60947-7-1 CSA22.2-158

800 V	300 V		
57 A	50 A		
1.2 Nm	14 lb-in		



Melamine / 1

8 KV / 3

Type / Cat. No.	Standard Pack
CTS10SC	100
CTSEP1SC	50
CTSP1SC	50
CA501-1M / CA501-1M-S	25 m
CA502 / CA702	50
CA509/K2WHT	100
SCS0.8/4 Blade size: 0.8 x 4 mm	10

Type / Cat. No.	I <sub>max</sub>	Standard Pack
CA604/1		100
CA604/2		100
CA604/3		100
CA604/4		100
CA526/2	57 A	100
CA526/3	57 A	50
CA526/4	57 A	50
CA526/10	57 A	10
CA626/2	57 A	100
CA626/3	57 A	50
CA626/4	57 A	50
CA626/10	57 A	10
CA503/6	57 A	100
CA504/6	57 A	100
CA505/6	57 A	100
CA510/6	57 A	100
CA707/S/Q/3		100
CA506/6	57 A	100
CA707/L/Q/3		100

# MULTIPOLE STRIP TERMINAL BLOCKS


The CMST series Terminal Blocks can be directly mounted on panel surfaces with the help of fixing screws. They are available from a 2 upto 12 pole configuration.

CMST2 series Terminal Blocks are an ideal choice for transformers. It has a special current bar design, enabling direct soldering of transformer wires.


The CMST terminal strip can also be fixed on the edge of transformer plates / panels with the help of FPCMST fixing plates.

Cross connection can be achieved with the aid of insulated side shorting links.

FPCMST Partition plate for terminal strip

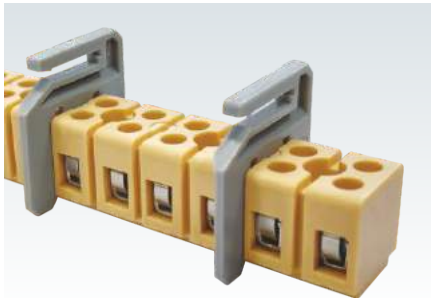


Mounting of terminal strip with panel fixing plate FPCMST

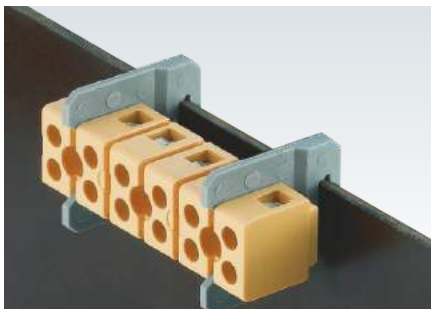

Connection Possibility as per		IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG	
	Solid with Ferrule / Lug	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG	
	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	22 - 18 AWG	
Wire Stripping Length		9 mm		
Ratings As Per		IEC60947-7-1 CSA22.2-158		
Voltage		400 V	300 V	
Current		24 A	20 A	
Torque		0.4 Nm	4.5 lb-in	
Approvals				
Insulation Material / Comparative Tracking Index		Melamine / 1		
Rated Impulse Voltage / Pollution Degree		6 KV / 3		
		Type / Cat. No.	Length (L) mm	Standard Pack
Terminal Block	12 pole	CMST1	110	20
	2 pole	CMST12W	20	120
	3 pole	CMST13W	29	80
	4 pole	CMST14W	38	60
	5 pole	CMST15W	47	45
	6 pole	CMST16W	56	40
	7 pole	CMST17W	65	30
	8 pole	CMST18W	74	30
	9 pole	CMST19W	83	25
	10 pole	CMST110W	92	20
Panel Fixing / Partition Plate		FPCMST		50
Two pole Insulated Shorting Link		CA513	Imax.: 24 A	50
Marking Strip		CA509/7		10
Markers Fixing Screw with fibre washer size M3 x 18		CA502/F		20

## CMST1

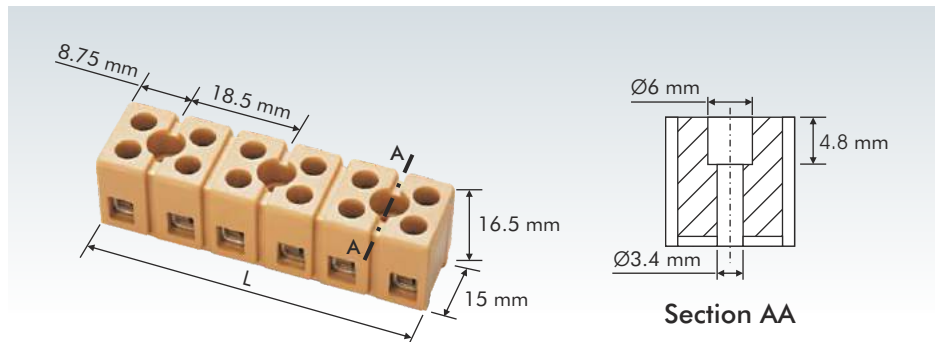

## CMST2



Connection Possibility as per		IEC	UL - CSA	
With 1 Conductor per clamp	Stranded / Flexible	0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG	
	Solid	0.2 - 4.0 mm <sup>2</sup>	22 - 10 AWG	
	with Ferrule / Lug	0.2 - 2.5 mm <sup>2</sup>	22 - 14 AWG	
With 2 same size Conductors per clamp	Stranded / Flexible	0.2 - 1.5 mm <sup>2</sup>	22 - 18 AWG	
	with TWIN Ferrule / Lug	0.2 - 1.5 mm <sup>2</sup>	22 - 18 AWG	
Wire Stripping Length		9 mm		
Ratings As Per		IEC60947-7-1 CSA22.2-158		
Voltage		400 V	300 V	
Current		24 A	20 A	
Torque		0.4 Nm	4.5 lb-in	
Approvals				
Insulation Material / Comparative Tracking Index		Melamine / 1		
Rated Impulse Voltage / Pollution Degree		6 KV / 3		
		<b>Type / Cat. No.</b>	<b>Length (L) mm</b>	<b>Standard Pack</b>
Terminal Block	12 pole	CMST2	110	20
	2 pole	CMST22W	20	120
	3 pole	CMST23W	29	80
	4 pole	CMST24W	38	60
	5 pole	CMST25W	47	45
	6 pole	CMST26W	56	40
	7 pole	CMST27W	65	30
	8 pole	CMST28W	74	30
	9 pole	CMST29W	83	25
	10 pole	CMST210W	92	20
Panel Fixing Plate		FPCMST		50
Two pole Insulated Shorting Link		CA513	I <sub>max</sub> : 24 A	50
Marking Strip		CA509/7		10
Markers Fixing Screw with fibre washer size M3 x 18		CA502/F		20

# CERAMIC TERMINAL BLOCKS


These Terminal Blocks are used in extremely high temperature applications such as hot melt glue guns, furnaces, heaters, process equipment and machinery. These Ceramic Terminal Blocks have an operating temperature range of -40° to 650°C.

## CB4





Height x Width (Thickness)	25 x 19 mm			
Connection Possibility as per	IEC	UL - CSA		
	With 1 Conductor per clamp	Stranded / Flexible	0.5 - 2.5 mm <sup>2</sup>	24 - 12 AWG
		Solid	0.5 - 4.0 mm <sup>2</sup>	24 - 10 AWG
		with Ferrule / Lug	0.5 - 2.5 mm <sup>2</sup>	24 - 12 AWG
With 2 same size Conductors per clamp	Stranded / Flexible	0.5 - 1.5 mm <sup>2</sup>	24 - 12 AWG	
	with TWIN Ferrule / Lug	0.5 - 1.5 mm <sup>2</sup>	24 - 12 AWG	
Wire Stripping Length	8 mm			
Ratings As Per	IEC60947-7-1	UL-1059	CSA22.2-158	
Voltage	800 V	300 V	300 V	
Current	24 A	20 A	30 A	
Torque	0.4 Nm	6 lb-in	7 lb-in	
Approvals				
Insulation Material / Comparative Tracking Index	Ceramic / 1			
Rated Impulse Voltage / Pollution Degree	4 KV / 3			
<b>No. of Poles</b>	<b>Type</b>	<b>Type / Cat. No.</b>	<b>Standard Pack</b>	
1	Free Floating	CB4/1	50	
2	Free Floating	CB4/2	100	
2	With Mounting Hole	CB4/2H	50	
3	Free Floating	CB4/3	50	
3	With Mounting Hole	CB4/3H	50	
Screw Driver		SCS0.5/3 Blade size: 0.5 x 3 mm	10	



Design A





Design B





Design C





Design D



Design E



Design F



**CB6**



25 x 19 mm

**CB16**



29 x 24 mm

IEC	UL - CSA
0.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.5 - 6.0 mm <sup>2</sup>	
0.5 - 4.0 mm <sup>2</sup>	22 - 10 AWG
0.5 - 2.5 mm <sup>2</sup>	22 - 12 AWG
0.5 - 2.5 mm <sup>2</sup>	22 - 12 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	300 V	300 V
32 A	30 A	40 A
0.5 Nm	6 lb-in	7 lb-in



Ceramic / 1

4 KV / 3

Type / Cat. No.	Standard Pack
CB6/1	50
CB6/2H	50
CB6/3H	50
CB6/4H	50
SCS0.8/4 Blade size: 0.8 x 4 mm	10

IEC	UL - CSA
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG
1.5 - 10.0 mm <sup>2</sup>	22 - 6 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG
1.5 - 6.0 mm <sup>2</sup>	22 - 8 AWG

8 mm

IEC60947-7-1 UL-1059 CSA22.2-158

800 V	300 V	300 V
57 A	65 A	76 A
1.2 Nm	12 lb-in	14 lb-in



Ceramic / 1


4 KV / 3

Type / Cat. No.	Standard Pack
CB16/2H	50
CB16/3H	50
SCS0.8/4 Blade size: 0.8 x 4 mm	10







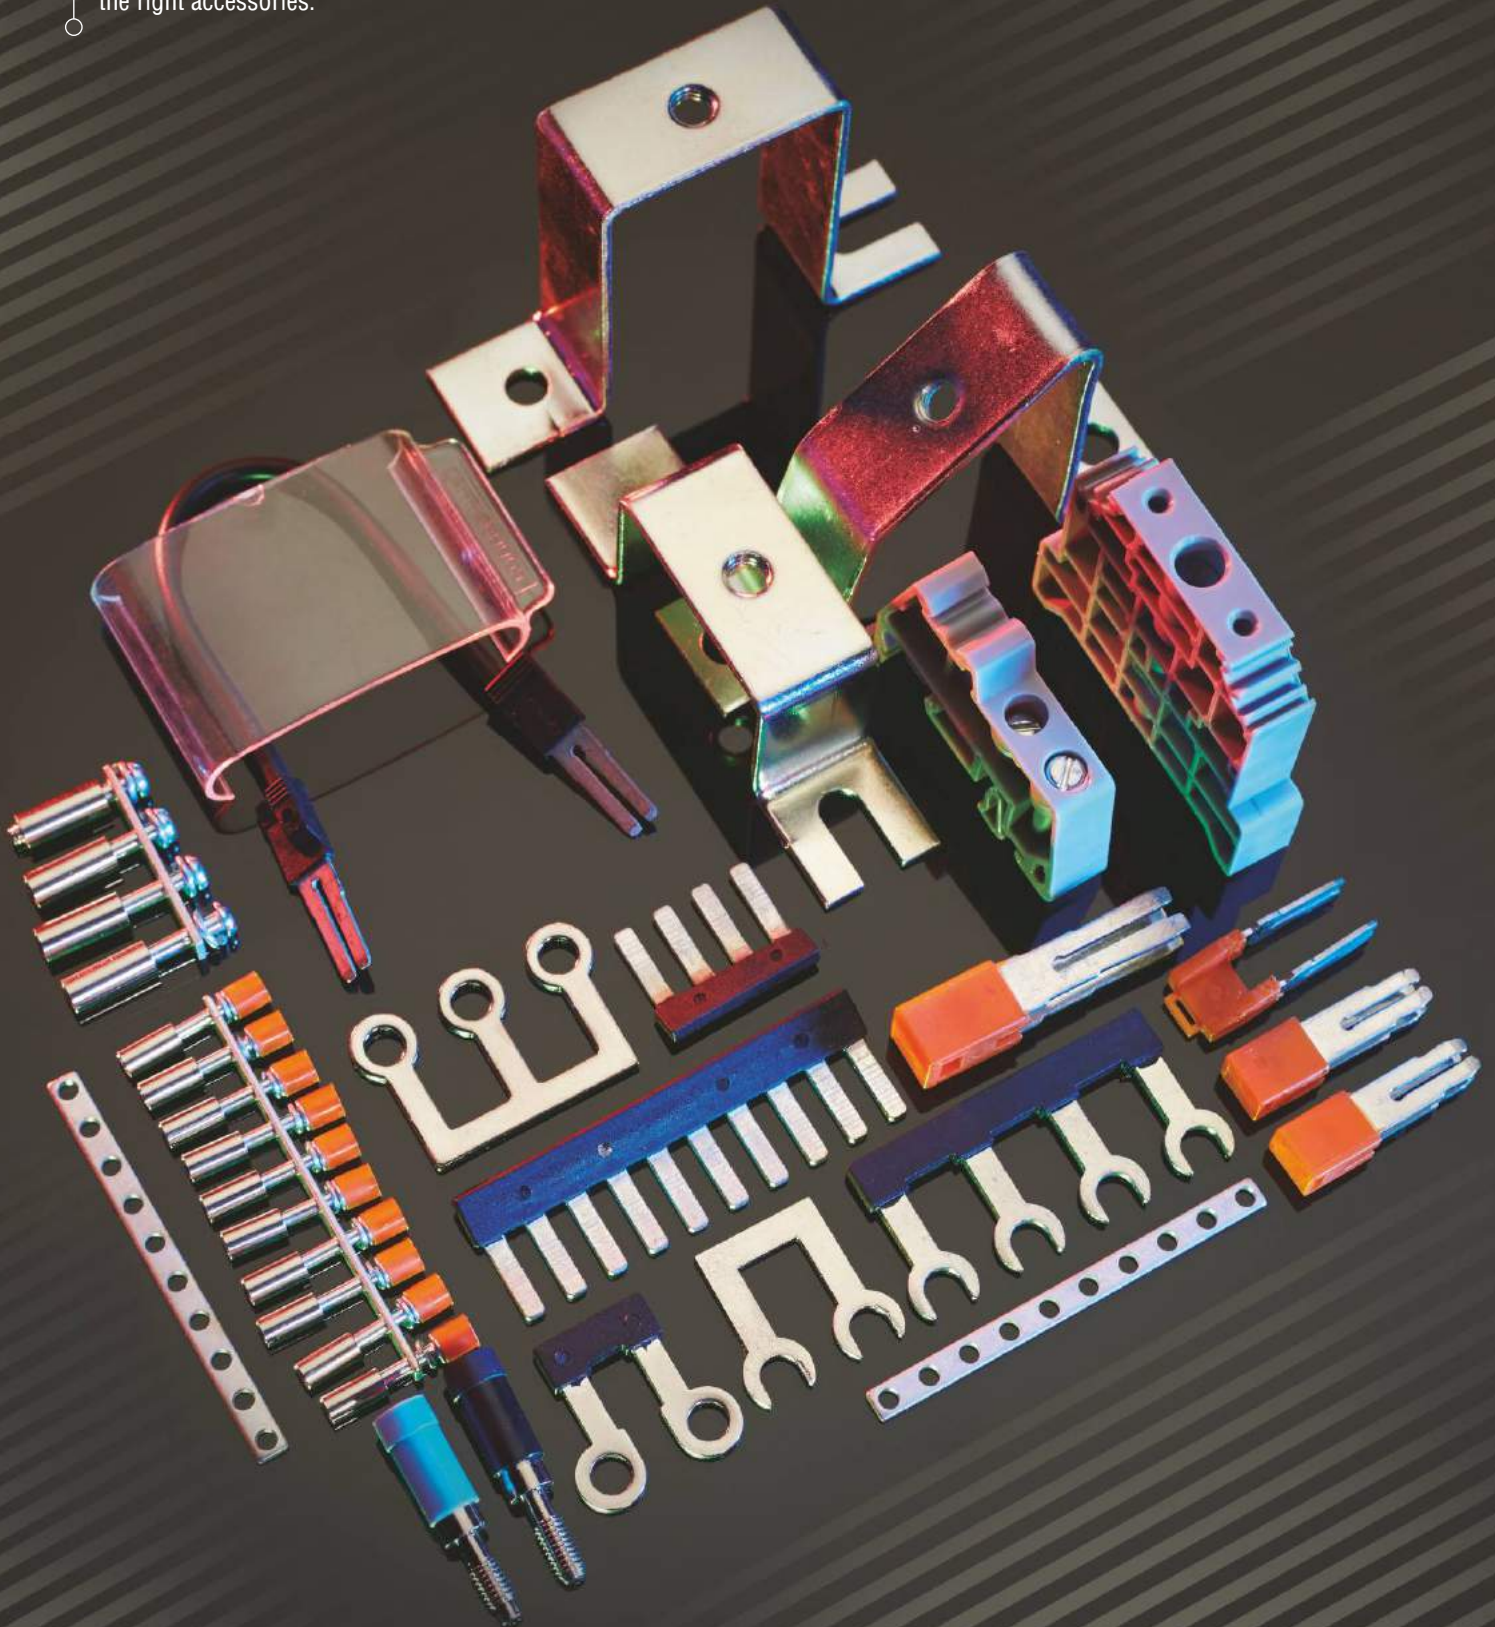









Type Cat. No.	Design Type	No. of Poles	Stripping Length	P	a	b	Fixing Screw
CB4/1	A	1	6	11	-	-	-
CB4/2	B	2	6	18	7.2	-	-
CB4/2H	C	2	6	23	13.6	14.5	M3 x 16
CB4/3	D	3	6	25	7.2	-	-
CB4/3H	E	3	6	36	13	13	M3 x 16
CB6/1	A	1	6	12	-	-	-
CB6/2H	C	2	6	26	15	12.6	M3 x 16
CB6/3H	E	3	6	41	15	15	M3 x 16
CB6/4H	F	4	8	40	13.5	-	M8 x 16
CB16/2H	C	2	8	31	17	16.5	M3 x 20
CB16/3H	E	3	8	48	17	17	M3 x 20

# ACCESSORIES

Complemented your designs and safety with the right accessories.



## ACCESSORIES

	<b>Mounting Rail</b>	<b>219</b>
	<b>End Clamp</b>	<b>220</b>
	<b>Group Marker Holder</b>	<b>221</b>
	<b>Mounting Brackets / Spacer</b>	<b>222</b>
	<b>Mounting Handle / Mounting Base</b>	<b>223</b>
	<b>Marking Tags</b>	<b>224</b>
	<b>Warning Labels / Test Plugs</b>	<b>225</b>
	<b>Marker Plotter System</b>	<b>227 - 228</b>
	<b>Screw Clamp Terminal Block Shorting Links</b>	<b>229 - 232</b>
	<b>Melamine Terminal Block Shorting Links</b>	<b>233 - 234</b>
	<b>Stud Type Terminal Block Shorting Links</b>	<b>233 - 234</b>
	<b>CX, CSC, CY, AS Series Terminal Shorting Links</b>	<b>235</b>
	<b>End Plates</b>	<b>236</b>
	<b>Partition &amp; Separator Plates</b>	<b>237</b>
	<b>Professional Tools</b>	<b>238 - 240</b>
	<b>Sockets &amp; Switches</b>	<b>241 - 242</b>




## MOUNTING RAILS

Most of Connectwell's Terminal Blocks and Interface Modules are designed to be mounted on DIN Rails (Channels) that can be fixed easily on panel boards and other equipment.


Connectwell offers three types of steel mounting rails: Din 32, Din 35 and Din 15 that comply with European standards **EN 50 0035**, **EN 50 022** and **EN 50 045** respectively. The rails are zinc plated and chromate passivated. According to the **DIN VDE 0611** part 3, steel mounting rails are permissible as grounding bus bars (**PE** function) but do not have the **PEN** function.

All mounting rails are available in standard 1m and 2 m lengths. Cut to length mounting rails with holes / slots as per customer requirement are also available on request.

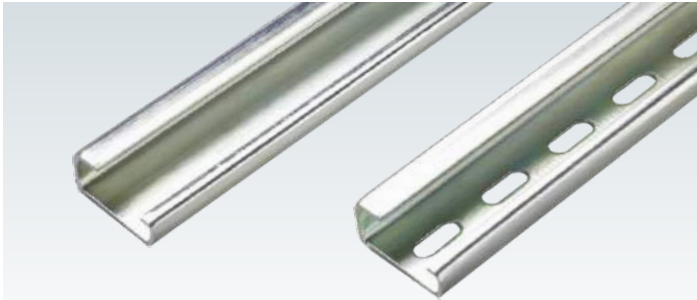


**Din 32 Rail [Din 1] (32 x 15 x 1.5 mm)**

Part No.	Length/Type	Standard Pack
CA501-1M	1 m, unslotted	25 m
CA501-1M-S	1 m, slotted	25 m
CA501-2M	2 m, unslotted	50 m
CA501-2M-S	2 m, slotted	50 m

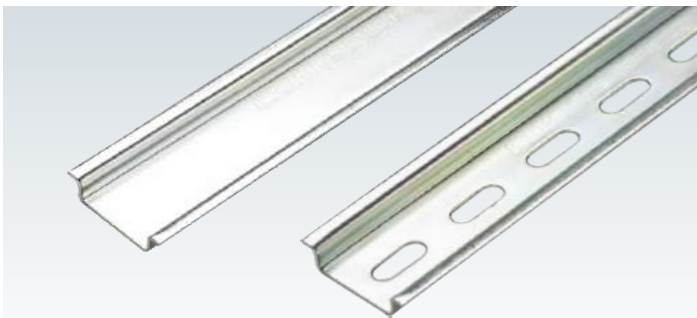


**Din 35 Rail [Din 3] (35 x 7.5 x 1.0 mm)**

Part No.	Length/Type	Standard Pack
CA701-1M	1 m, unslotted	50 m
CA701-1M-S	1 m, slotted	50 m
CA701-2M	2 m, unslotted	50 m
CA701-2M-S	2 m, slotted	50 m

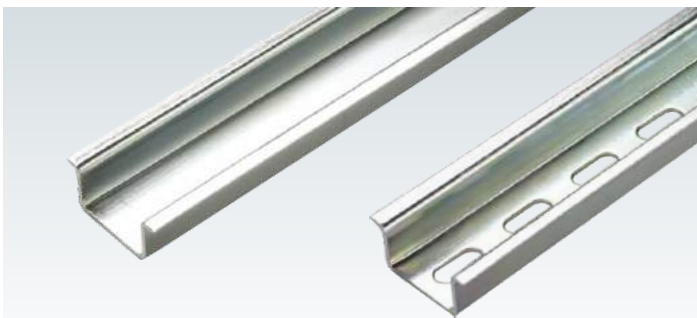

**Din 35-15 Rail [Din 1] (35 x 15 x 1.5 mm)**

Part No.	Length/Type	Standard Pack
CA701-15-1M	1 m, unslotted	25 m
CA701-15-1M-S	1 m, slotted	25 m
CA701-15-2M	2 m, unslotted	50 m
CA701-15-2M-S	2 m, slotted	50 m

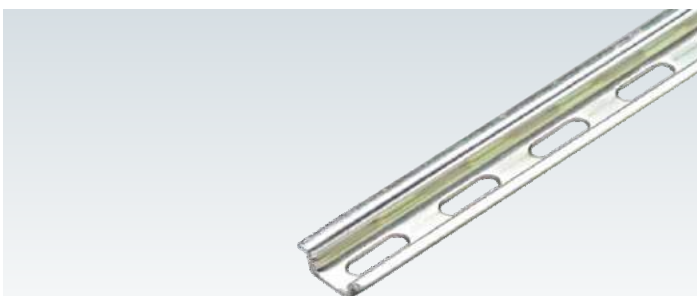

**Din 15 Rail [Din 2] (15 x 5 x 1.0 mm)**

Part No.	Length/Type	Standard Pack
CA601-1M	1 m, slotted	200 m

# END CLAMPS

End Clamps help to secure the entire Terminal Block assembly on the DIN Rail. End Clamps should be fixed on both sides of the Terminal Block assemblies. These End Clamps are designed to fix on DIN 32, DIN 35 and DIN 15 rails. The Polyamide series End Clamps have suitable recesses to accommodate a group marker holder and marking tags for group identification. The steel parts are Zinc plated and Chromate passivated. The CA102 and CA202 are large End Clamps for heavy duty applications. CA103 is a screwless End Clamp which can be snapped on to the Din Rail.

CA702			CA102			CA802		
								
Width (Thickness) x Length	9 x 45 mm		Width (Thickness) x Length	9 x 46 mm		Width (Thickness) x Length	8 x 45 mm	
Height with DIN 35 x 7.5 mm Rail	35.75 mm		Height with DIN 35 x 7.5 mm Rail	51.40 mm		Height with DIN 35 x 7.5 mm Rail	31.30 mm	
Height with DIN 35 x 15 mm Rail	43.30 mm		Height with DIN 35 x 15 mm Rail	58.90 mm		Height with DIN 35 x 15 mm Rail	38.80 mm	
Height with DIN 32 mm Rail	36.85 mm		Height with DIN 32 mm Rail	52.50 mm				
Material	Polyamide 66		Material	Polyamide 66		Material	Polyamide 66	
Part No.	Suitable For	Std. Pack	Part No.	Suitable For	Std. Pack	Part No.	Suitable For	Std. Pack
CA702	DIN 32 / DIN 35 / DIN 35-15 Rail	50	CA102	DIN 32 / DIN 35 / DIN 35-15 Rail	50	CA802	DIN 35 / DIN 35-15 Rail	50
CA202			CA103			CA104		
								
Width (Thickness) x Length	9.5 x 50 mm		Width (Thickness) x Length	6 x 41 mm		Width (Thickness) x Length	10 x 41 mm	
Height with DIN 35 x 7.5 mm Rail	48.50 mm		Height with DIN 35 x 7.5 mm Rail	36.10 mm		Height with DIN 35 x 7.5 mm Rail	36.10 mm	
Height with DIN 35 x 15 mm Rail	55.80 mm		Height with DIN 35 x 15 mm Rail	43.25 mm		Height with DIN 35 x 15 mm Rail	43.25 mm	
Material	Polyamide 66		Material	Polyamide 66		Material	Polyamide 66	
Part No.	Suitable For	Std. Pack	Part No.	Suitable For	Std. Pack	Part No.	Suitable For	Std. Pack
CA202	DIN 35 / DIN 35-15 Rail	25	CA103	DIN 35 / DIN 35-15 Rail	50	CA104	DIN 35 / DIN 35-15 Rail	50
CA602			CA302 / CA402			CA502		
								
Width (Thickness) x Length	8 x 28 mm		Width (Thickness) x Length	16 x 27 mm		Width (Thickness) x Length	11.5 x 22.5 mm	
Height with DIN 15 mm Rail	21.60 mm		Height with DIN 35 x 7.5 mm Rail	29.00 mm		Height with DIN 32 mm Rail	29.20 mm	
Height with DIN 35 x 15 mm Rail			Height with DIN 35 x 15 mm Rail	37.50 mm				
Material	Polyamide 66		Material	Steel		Material	Steel	
Part No.	Suitable For	Std. Pack	Part No.	Suitable For	Std. Pack	Part No.	Suitable For	Std. Pack
CA602	DIN 15 Rail	50	CA302	DIN 35 Rail	50	CA502	DIN 32 Rail	50
			CA402	DIN 35-15 Rail	50			

# GROUP MARKER HOLDER

Two variants of Group Marker Holders are available for identification of Terminal Block assemblies:

**GMH1, GMH2, GMH3, GMH4, GMH5** and **GMH8** are to be mounted in the grooves of End Clamps.

**CA509/G1** marking tag can be used with these marker holders or can be directly mounted on the end clamp.

**GMH6 & GMH7** can be mounted directly on Din Rails. A sticker / paper needs to be inserted in the slot which is covered by a transparent plastic sheet.


## GMH6



Height x Length x Thickness (mm)	46.5 x 44.5 x 9.5
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
GMH6	DIN 32 / DIN 35 / DIN 35-15 Rail	50


## GMH7

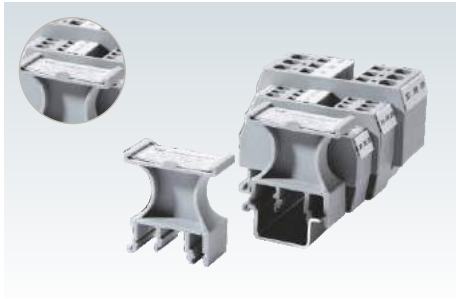

Height x Length x Thickness (mm)	46.5 x 44.5 x 19.5
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
GMH7	DIN 32 / DIN 35 / DIN 35-15 Rail	50

## GMH8 / GMH8N

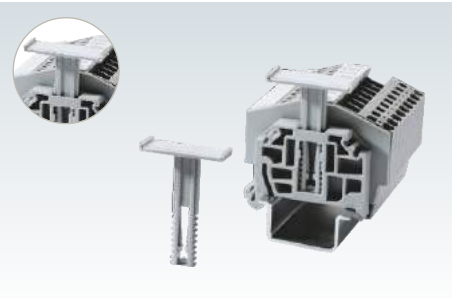

Height x Length x Thickness (mm) GMH8	44.65 x 31.10 x 10 mm
Height x Length x Thickness (mm) GMH8N	44.65 x 31.10 x 6 mm
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
GMH8	CA103 / CA104	100
GMH8N	CA103 / CA104	100


## CA509/G1 & CA509/G2



Material	Polyamide 66
Mountable on all End Clamps	

Part No.	Dimension (H x L x T)	Std. Pack	Tags
CA509/G1	4.3 x 34 x 17.8 mm	1 Pkt	100
CA509/G2	4.3 x 34 x 8 mm	1 Pkt	100


## GMH1

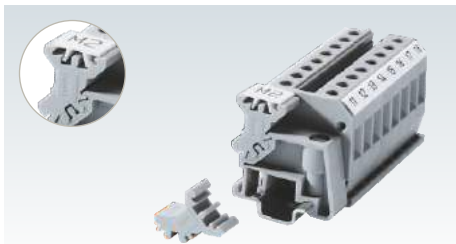

Height x Length x Thickness	15.8 x 14.6 x 8 mm
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
GMH1	CA602	100

## GMH2 / GMH3

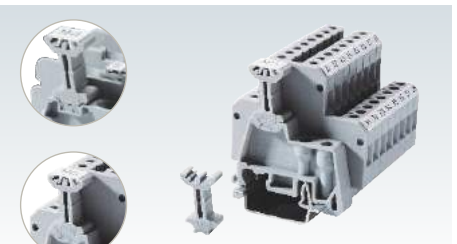

Height x Length x Thickness GMH2	23.2 x 14 x 8 mm
Height x Length x Thickness GMH3	23 x 14 x 8 mm
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
GMH2	CA702	100
GMH3	CA802	100


## TM3.5 / TM5



TM3.5 (Height x Length x Thickness)	34 x 17.8 x 3.5 mm
TM5 (Height x Length x Thickness)	38 x 17 x 5 mm
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
TM3.5	CPDL Series Terminals	50
TM5	CXDL Series Terminals	50


## GMH4

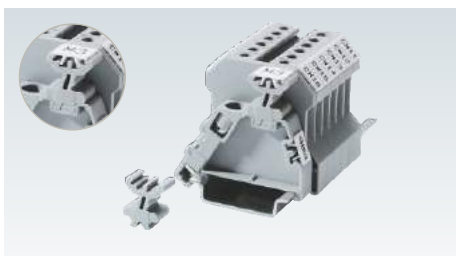

Height x Length x Thickness	16.2 x 14 x 8 mm
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
GMH4	CA802	100

## GMH5

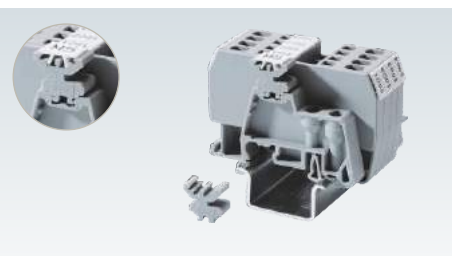

Height x Length x Thickness	13.7 x 14 x 8 mm
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
GMH5	CA702	100

# MOUNTING BRACKETS

These are used for better access and increased clearance from the surface of the panel. These brackets are made of mild steel with zinc plating & chromate passivation.

**CA603** - Can be used to install mounting rails at an angle of 45° to the panel surface.

**CA703 / CA803 / CA903** - Are used for fixing mounting rails at different heights.

<table border="1"> <thead> <tr> <th>Part No.</th> <th>Std. Pack</th> </tr> </thead> <tbody> <tr> <td>CA603</td> <td>25</td> </tr> </tbody> </table>	Part No.	Std. Pack	CA603	25	<table border="1"> <thead> <tr> <th>Part No.</th> <th>Std. Pack</th> </tr> </thead> <tbody> <tr> <td>CA703</td> <td>25</td> </tr> </tbody> </table>	Part No.	Std. Pack	CA703	25	<table border="1"> <thead> <tr> <th>Part No.</th> <th>Std. Pack</th> </tr> </thead> <tbody> <tr> <td>CA803</td> <td>25</td> </tr> </tbody> </table>	Part No.	Std. Pack	CA803	25	<table border="1"> <thead> <tr> <th>Part No.</th> <th>Std. Pack</th> </tr> </thead> <tbody> <tr> <td>CA903</td> <td>25</td> </tr> </tbody> </table>	Part No.	Std. Pack	CA903	25
Part No.	Std. Pack																		
CA603	25																		
Part No.	Std. Pack																		
CA703	25																		
Part No.	Std. Pack																		
CA803	25																		
Part No.	Std. Pack																		
CA903	25																		


# SPACER

CASP can be used to increase the creepage and clearance distance between the Terminal Blocks and to segregate the different groups of Terminal Blocks.

**CDL4USP** can be stacked with the **CDL4U(O)** Terminal Block to create a housing for discrete components or small electronic circuits. Similarly CDL4UNSP fits the CDL4UN Terminal Block. The stacked housing can be fitted with an end plate to create a 'touch-proof' housing.


Width (Thickness) x Length	8 x 45 mm
Height with DIN 35 x 7.5 mm Rail	30.50 mm
Height with DIN 35 x 15 mm Rail	38.10 mm
Height with DIN 32 mm Rail	35.45 mm
Material	Polyamide 66

Part No.	Suitable For	Std. Pack
CASP	DIN 32 / DIN 35 / DIN 35-15 Rail	50

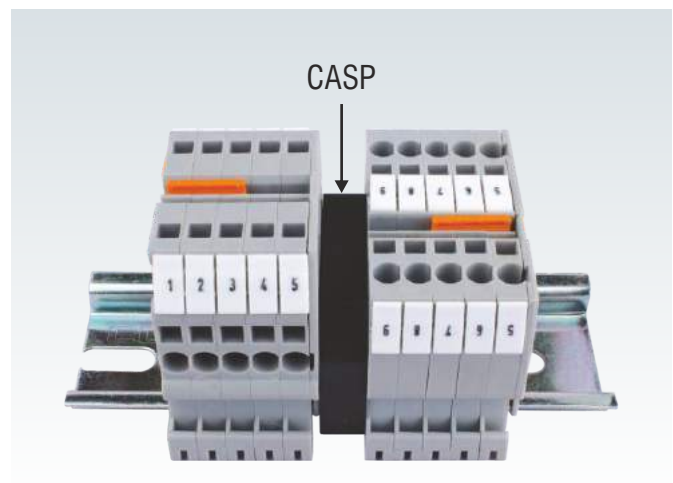


Material	Polyamide 66		
----------	--------------	--	--

Part No.	Suitable For	Dimension (T x L x H)	Std. Pack
CDL4USP	CDL4U	54 x 55.5 x 6 mm	50
CDL4UNSP	CDL4UN	57 x 58 x 6 mm	50

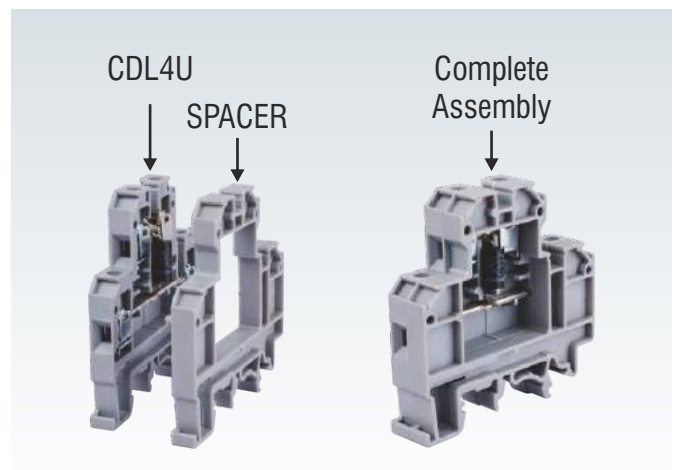

# MOUNTING HANDLE

The Mounting Handle is used for easy and quick mounting of 10 Terminal Blocks on a Din Rail. The Terminal Blocks can be lifted from the packaging box with the help of this tool.

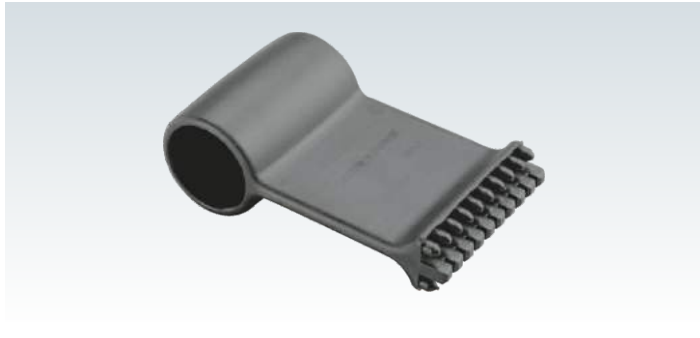


Part No.	Suitable for	Standard Pack
MH2.5	CTS2.5UN	1
MH4	CTS2.5UE / CTS4UN	1





# MOUNTING BASE


CMTB35 is used to assemble components on a Din Rail. The mounting base has 4 holes of Ø4.3mm and 2 holes of Ø5.5mm. CA902 can be used to fasten Din 15 Rail on to the Din 32 Rail.

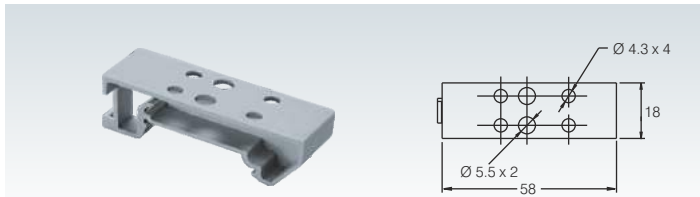

Part No.	Suitable for	Standard Pack
CMTB35	Din 35 rail mounting	50

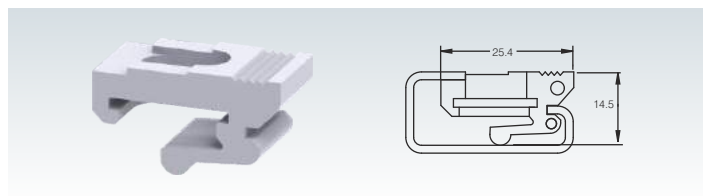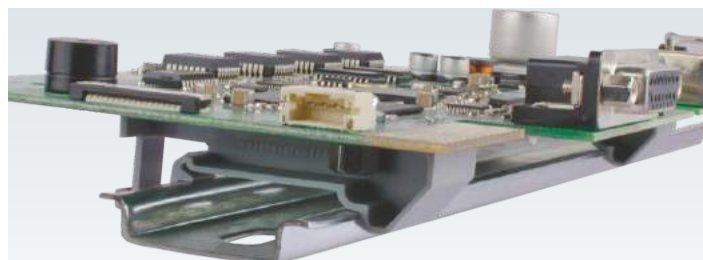

Part No.	Suitable for	Standard Pack
CA902	Din 32 rail mounting	50

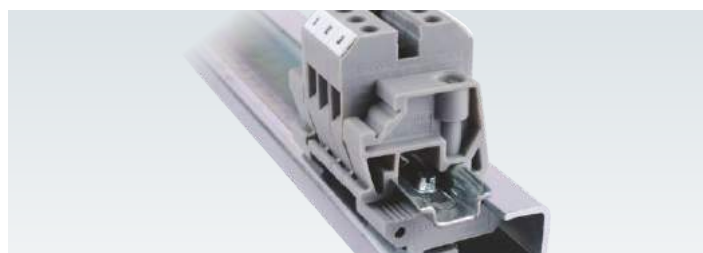

# SPRING CLAMP ACTUATOR TOOL

The spring clamp actuator tool can actuate two adjacent springs thereby facilitating rapid wiring.



Part No.	Suitable for	Standard Pack
SCA2.5	CX2.5, CXDL2.5, CM2.5S, CXM2.5, CSCP2.5 Series Terminals	1




# MARKING TAGS




## 'K' Series Marking Tags

The quick to fix 'K' series Marking Tags facilitate identification of Electrical circuits in a Terminal Block assembly. This in turn makes the maintenance of individual components quicker and hassle free. The tags come with a large surface area providing better visibility. All 'K' series tags are available as strips in which an individual marker can be easily separated. CA509/K6F and CA509/K9F marking tags are continuous strips of 60 mm and 90 mm length respectively. The Marking Tags are available in both printed and blank versions. The printing can be horizontal or vertical in 2 or 3 digits, alphabets or symbols or a combination of these depending on user's requirement.

For ordering pre-printed marking tags, the following pattern should be followed:

For a strip of marking tags for CTS2.5UN Terminal Blocks marked horizontally from 1 to 10: CA509/K5/H/1-10 

For a strip of marking tags for CTS4UN Terminal Blocks marked vertically with alphabet A: CA509/K6/V/A 

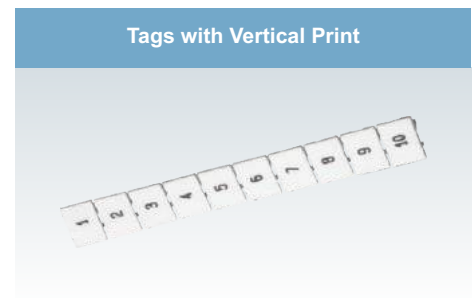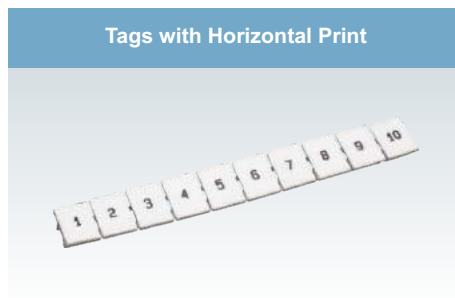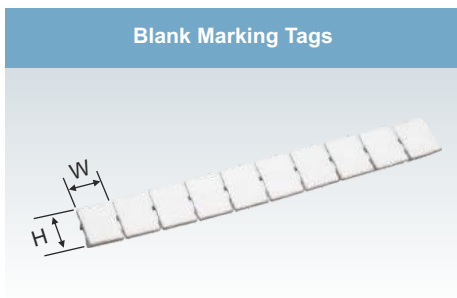



Part No.	Std. Pack		Dimensions	
	Packet	Strips	H	W
CA509/K2WHT	1	10	4.9	5.8
CA509/K3WHT	1	20	5.0	10.0
CA509/K4WHT	1	10	5.0	4.8
CA509/K5WHT	1	10	9.5	4.5
CA509/K6WHT	1	10	9.5	5.6
CA509/K6FWHT	1	10	9.5	60
CA509/K7.5WHT	1	10	5.3	7.5
CA509/K8WHT	1	10	10.5	7.5
CA509/K9WHT	1	10	10.3	8.7
CA509/K9FWHT	1	10	10.3	90.0
CA509/K10WHT	1	20	10.4	9.5
CA509/K12WHT	1	20	10.4	11.4
CA509/K16WHT	1	20	10.5	15.4
CA509/K2GWHT	1	10	5.0	5.0
CA509/K2B4WHT	1	10	5.8	9.1
CA509/K3.5WHT	1	8	9.2	3.5
MS3.5WHT	1	8	8	3.5
MS5WHT	1	10	5.0	8.0

Part No.	Std. Pack		Dimensions	
	Packet	Strips	H	W
CA509/K2/H	1	10	4.9	5.8
CA509/K3/H	1	20	5.0	10.0
CA509/K4/H	1	10	5.0	4.8
CA509/K5/H	1	10	9.5	4.5
CA509/K6/H	1	10	9.5	5.6
CA509/K6F/H	1	10	9.5	60
CA509/K7.5/H	1	10	5.3	7.5
CA509/K8/H	1	10	10.5	7.5
CA509/K9/H	1	10	10.3	8.7
CA509/K9F/H	1	10	10.3	90.0
CA509/K10/H	1	20	10.4	9.5
CA509/K12/H	1	20	10.4	11.4
CA509/K16/H	1	20	10.5	15.4
CA509/K2G/H	1	10	5.0	5.0
CA509/K2B4/H	1	10	5.8	9.1
CA509/K3.5WHT	1	8	9.2	3.5
MS3.5WHT	1	8	8	3.5
MS5WHT	1	10	5.0	8.0

Part No.	Std. Pack		Dimensions	
	Packet	Strips	H	W
CA509/K2/V	1	10	4.9	5.8
CA509/K3/V	1	20	5.0	10.0
CA509/K4/V	1	10	5.0	4.8
CA509/K5/V	1	10	9.5	4.5
CA509/K6/V	1	10	9.5	5.6
CA509/K6F/V	1	10	9.5	60
CA509/K7.5/V	1	10	5.3	7.5
CA509/K8/V	1	10	10.5	7.5
CA509/K9/V	1	10	10.3	8.7
CA509/K9F/V	1	10	10.3	90.0
CA509/K10/V	1	20	10.4	9.5
CA509/K12/V	1	20	10.4	11.4
CA509/K16/V	1	20	10.5	15.4
CA509/K2G/V	1	10	5.0	5.0
CA509/K2B4/V	1	10	5.8	9.1
CA509/K3.5WHT	1	8	9.2	3.5
MS3.5WHT	1	8	8	3.5
MS5WHT	1	10	5.0	8.0

# WARNING LABELS


Warning label that can be mounted on top of the Terminal Block for giving visual identification, it also makes an entire DIN Rail Terminal Block assembly completely shock proof.

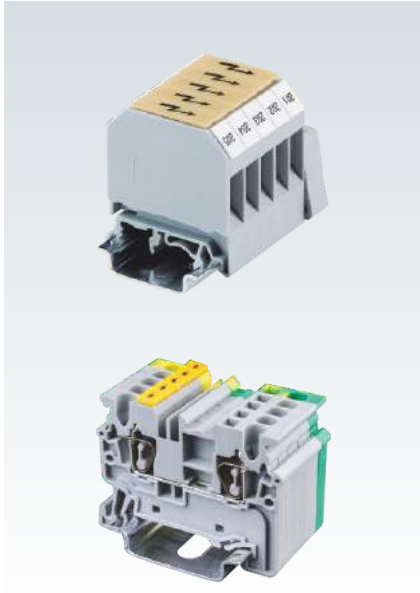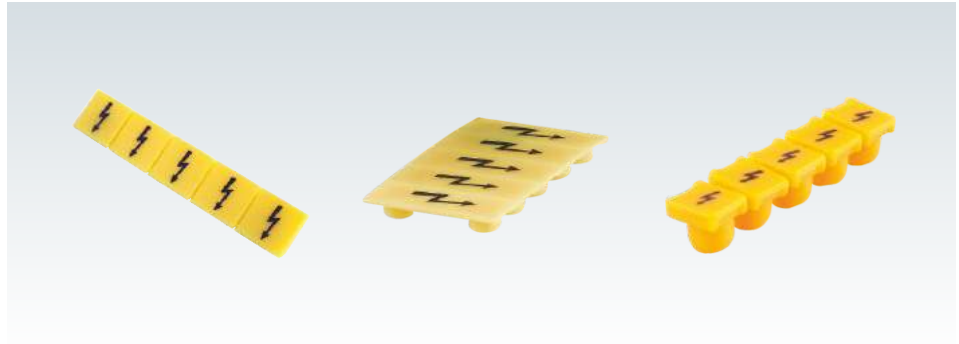

Terminal Block	Part No.	Standard Pack		
		Packet	Strips	Labels
CX2.5, CXG2.5 Series CXDL, CXDLG2.5 Series CXK2.5 Series CXM2.5, CXMG2.5	WLX2.5 WLX2.5/V (Vertical Imprint)	1	20	100
CX4, CXG4 Series CXF, CXVF Series CXK4 Series CYF, CYK, CYDLK Series	WLX4	1	20	100
CX6, CXG6 Series CXDB Series	WLX6	1	20	100
CX10, CXG10 Series	WLX10	1	20	100
CSC16T, CSCG16T	SWL16	1	20	100
CTS4UN, CTS2.5UE CDB4, CMDB4 Series	SWL4	1	20	100
CTS6U CDB6, CMDB6 Series	SWL6	1	20	100

# TEST PLUGS

The Test Plugs make contact with the shorting link shaft of Terminal Block. Test adapters can be assembled with spacer to create space between to plugs & making alternate arrangement.

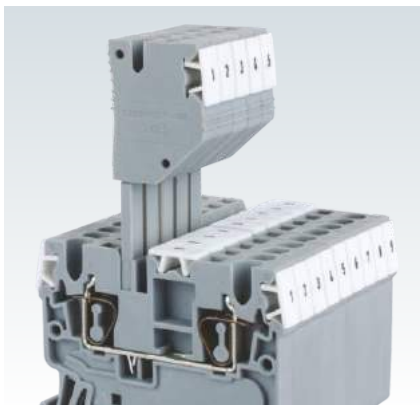

Terminal Block	Part No.	Standard Pack
CX2.5, CXG2.5 Series CXDL, CXDLG2.5 Series CXK2.5 Series CXM2.5, CXMG2.5	TX2.5	20

# RoHS COMPLIANCE

The RoHS (Restriction of Hazardous Substances) Directive 2011/65/EU dated 8th June 2011 addresses the restriction of the use of certain hazardous substances in electrical and electronic equipment.

Producers of certain categories of electrical and electronic equipment cannot use high levels of the following six banned substances:

Lead (Pb)

Hexavalent chromium (Cr-VI)

Mercury (Hg)

Cadmium (Cd)

Polybrominated biphenyls (PBB) [flame retardant]

Polybrominated diphenyl ether (PBDE) [flame retardant]

On 4 June 2015, the EU commission has published a new Directive (EU) 2015/863 to amend Annex II to EU RoHS 2 (Directive 2011/65/EU) to add the following 4 phthalates onto the list of restricted substances

Bis(2-Ethylhexyl) phthalate (DEHP)

Benzyl butyl phthalate (BBP)

Dibutyl phthalate (DBP)

Diisobutyl phthalate (DIBP)

REACH is the regulation (EC) No 1907/2006 of the European Parliament and of the Council of 18, concerning the **Registration, Evaluation, Authorization and Restriction of Chemicals**.

Implemented on 1st June 2007, **REACH** requires the registration of some 30000 chemical substances (over a period of 11 years) in use today, a process which will allow to fill information gaps on the hazards of substances and to identify appropriate risk management measures to ensure their safe use.

European chemical agency (ECHA) has listed various **Substances of Very High Concern (SVHC)**. Less than 0.1% or less than 1000 ppm of **SVHC** will be allowed in REACH compliant products.



All Connectwell Terminal Blocks are  
**RoHS & REACH Compliant.**



# MARKER PLOTTER SYSTEM

## CMPS600 BASIC

The CMPS600 BASIC and CMPS600 units are auxiliary plotters and has to be connected to a computer via a USB connection. It is a high speed plotting device and enables plotting of different markers in one setting. The marker fixture and the plotter pen have to be inserted before commencing the plotting operation. The base unit is primarily controlled through a computer with the help of CMPS software.

Dimensions for CMPS600 BASIC are  
470 x 480 x 155 mm.

Dimensions for CMPS600 are  
690 x 480 x 155 mm.

### Technical Information:


Type of plotter	: Flatbed plotter
Plotting speed with pen	: up to 40 mm/s
Plotter pen	: Special plotter pens with HP fixing
Addressable resolution	: 0.01 mm
Repeat accuracy	: 0.05 mm
PC Interface	: USB Port
Power supply input voltage	: 100-240V AC / 50-60Hz
Power supply input current	: 0.7 A max.
Power supply output voltage	: 24 V DC
Power supply output current	: 1.25 A max.

## VE600

The engraving unit was specifically designed to be used with the CMPS600 BASIC and CMPS600 plotter systems. Changing back and forth between the pen-plotter and the engraver is easy. The engraver is meant to engrave signs on plastic, aluminium and other soft metals. Legend plates, push button inlays and other signage etc. can easily be produced with the VE600 engraving system.


The engraver also uses the standard CMPS software.

## CMPS600 BASIC

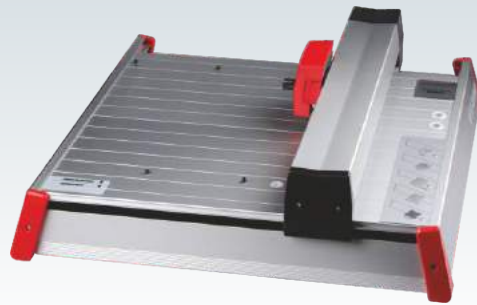


Description	Part No.
CMPS600 BASIC, A4 Size Plotter Unit (includes cable, power adapter & software)	PL-34130098

## CMPS600

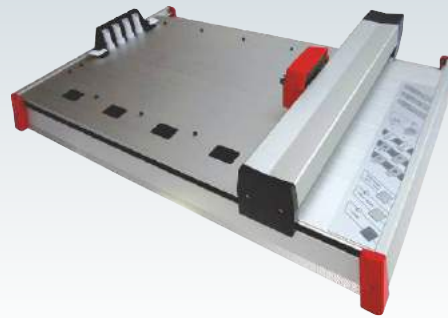

Description	Part No.
CMPS600, A3 Size Plotter Unit (includes cable, power adapter & software)	PL-34130099

## ENGRAVING SYSTEM (VE600)

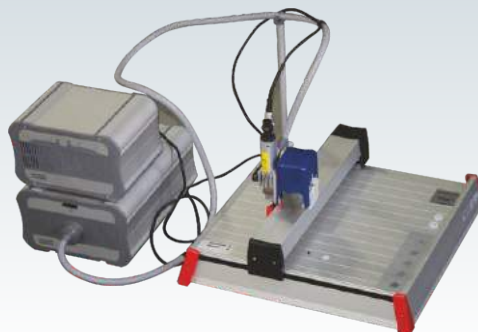

Description	Part No.
VE600 ENGRAVER UNIT (CMPS600 BASIC or CMPS600 REQUIRED)	PL-34000083

# MARKER PLOTTER & ENGRAVER ACCESSORIES

## DISPOSABLE PENS

These tubular nib pens are suitable for the CMPS600BASIC and CMPS600 plotters. The disposable pens use a special ink to deliver outstanding durability and print quality with the convenience of a use and throw system. This eliminates the need for messy ink refilling and pen cleaning operation. The ink is fast drying, smudge proof, fade resistant and resistant to chemicals when used on the 'K' series Connectwell marking tags. They are available in 6 sizes differentiated by their body colour.



Tip Width	Part No.
0.18 mm	PL-35003118
0.25 mm	PL-35003125
0.35 mm	PL-35003135
0.50 mm	PL-35003150
0.70 mm	PL-35003170
1.00 mm	PL-35003200

## FIXTURES


Fixtures are required for alignment of markers with respect to the plotter pen. Different marker fixtures can be mounted on the plotter bed of the CMPS600BASIC and CMPS600 plotters at the same time thereby reducing its set up time.

The CMPS600BASIC plotter bed can accept:

- 2 of the K5 fixtures or
- 2 of the K2 fixtures or
- 1 each of the above fixtures or
- 1 of the K5 triple fixture.

The CMPS600 plotter bed can accept:

- 4 of the K5 fixtures or
- 4 of the K2 fixtures or
- a combination of the above two fixtures.

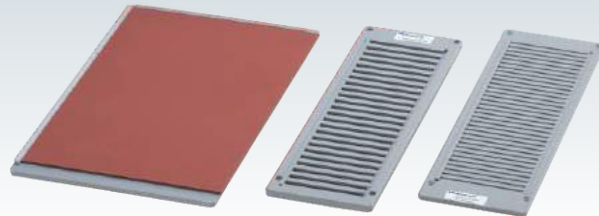

Description	For Marking Tag	Holding Capacity	Part No.
K5 Fixture	CA509/K5, K6, K8, K10, K12, K16	24 Strips	PL-34902001
K2 Fixture	CA509/K2, K3, K4, K20, K25, K2B4	24 Strips	PL-34902081
K5 Triple Fixture	CA509/K5, K6, K8, K10, K12, K16	72 Strips	PL-34130015
K9 Fixture	CA509/K9	24 Strips	PL-34902057
K2G Fixture	CA509/K2G	25 Strips	PL-34130010
Engraving Support Plate			PL-34902106

## ENGRAVING NEEDLES



Engraving needles are selected depending on the media being engraved. For aluminium and other soft metal media, the double tooth cutter in various tip widths can be selected. For plastic media, engraving needles with a 15° angle needs to be used. Other engraving needle options are available on request.

Description	Tip Width	Part No.
Double Tooth Cutter for Plastic and Alluminium	0.50 mm	PL-35010030
Double Tooth Cutter for Plastic and Alluminium	0.60 mm	PL-35010031
Double Tooth Cutter for Plastic and Alluminium	0.80 mm	PL-35010032
Double Tooth Cutter for Plastic and Alluminium	1.00 mm	PL-35010033
Double Tooth Cutter for Plastic and Alluminium	1.20 mm	PL-35010034
Double Tooth Cutter for Plastic and Alluminium	1.40 mm	PL-35010035
Double Tooth Cutter for Plastic and Alluminium	1.60 mm	PL-35010036
Double Tooth Cutter for Plastic and Alluminium	2.00 mm	PL-35010037
Double Tooth Cutter for Plastic and Alluminium	2.40 mm	PL-35010038
Double Tooth Cutter for Plastic and Alluminium	3.00 mm	PL-35010039
Engraving Needle 15° for Plastic	0.20 mm	PL-35010003
Engraving Needle 15° for Plastic	0.30 mm	PL-35010002
Engraving Needle 15° for Plastic	0.40 mm	PL-35010001
Engraving Needle 15° for Plastic	0.50 mm	PL-35010000
Engraving Needle 15° for Plastic	0.70 mm	PL-35010004
Engraving Needle 15° for Plastic	1.00 mm	PL-35010005
Engraving Needle 15° for Plastic Set (0.20 - 1.00 mm)	-	PL-35010006

# SCREW CLAMP TERMINAL BLOCK SHORTING LINKS

## Shorting / Bridging System for Polyamide Screw Clamp Terminal Blocks

The shorting systems bridge potentials between terminal blocks, reducing wiring time. Adjacent blocks or selective terminal blocks within an assembly can be easily interconnected, leaving terminal clamps free for wiring. Preassembled shorting links, which are ready for installation, are used for quick shorting or individual components can be selected to create custom or extra long shorting links. The current carrying capacity of shorting systems is lower than the rated current of the respective Terminal Blocks, therefore applied current must not exceed the maximum current value (IEC/EN) of the Terminal Block.

### Preassembled Internal shorting link assemblies

Internal shorting link Assemblies consist of a Current Bar, Shorting Sleeves and screws. They install easily into the center of the terminal block and connect to the current bar. They are available as standard 2, 3, 4, 10 or 100 pole assemblies and are ready for immediate installation. Insulated preassembled internal shorting link assemblies provide shock protection when installed on Terminal Blocks.

### Insulated External Shorting Links

External shorting links bridge potentials between terminal blocks, reducing wiring time. Adjacent or selected blocks within an assembly can be easily interconnected. Individual links may be removed for selective shorting. These are insulated and available in 2, 3, 4 and 10 pole versions. They are made of tin plated brass/copper. Insulated External Link must be tightened to the recommended torque specified to get a reliable connection.

### Permanent Shorting Links

Shorting Links are used to create custom shorting assemblies for increased number of poles. The current bar with the required number of poles can be selected, or can be cut in the field to the required length. They are made of tin or nickel plated copper or brass.

### Shorting Sleeves & Screws

Shorting Sleeves & Screws ensure reliable and mechanically safe electrical connections between shorting links and the Terminal Block current bars. One shorting sleeve is required for each shorted Terminal Block. They are made of nickel plated brass. Shorting Sleeve and Screws are supplied with spring washer. The shorting screws must be tightened to the recommended torque specified to get a reliable connection.

1 Internal shorting system not available.

2 100 pole strip can be broken down to any number of poles desired.

### Pre Assembled Shorting Link




### Insulated Pre Assembled Shorting Link



Terminal Series	Poles	Part No.	Torque	Std. Pack	Part No.	Torque	Std. Pack
CTS2.5UN	2	CA721/2	0.4 Nm	100	CA741/2	0.4 Nm	100
	3	CA721/3		100	CA741/3		100
	4	CA721/4		100	CA741/4		100
	10	CA721/10		10	CA741/10		10
	100 <sup>2</sup>	CA721/100		10	CA741/100		10
CTS4UN CMC1-2 CMC2-2 CKT4U <sup>1</sup> , 4U/4 CDL4UN CDL4UN(I.S)	2	CA722/2	0.4 Nm	100	CA742/2	0.4 Nm	100
	3	CA722/3		100	CA742/3		100
	4	CA722/4		100	CA742/4		100
	10	CA722/10		10	CA742/10		10
	100 <sup>2</sup>	CA722/100		10	CA742/100		10
CTS6U CDTTU <sup>1</sup> CDTTU-SH <sup>1</sup> CSDL6U <sup>1</sup> CSFL6U <sup>1</sup>	2	CA723/2	0.5 Nm	100	CA743/2	0.5 Nm	100
	3	CA723/3		50	CA743/3		50
	4	CA723/4		50	CA743/4		50
	10	CA723/10		10	CA743/10		10
CTS10U	2	CA724/2	0.5 Nm	100	CA744/2	0.5 Nm	100
	3	CA724/3		50	CA744/3		50
	4	CA724/4		50	CA744/4		50
	10	CA724/10		10	CA744/10		10
CTS16U	2	CA751/2	0.8 Nm	50	CA761/2	0.8 Nm	50
	3	CA751/3		50	CA761/3		50
	4	CA751/4		50	CA761/4		50
	10	CA751/10		10	CA761/10		10
CTS25UN	2	CA725/2	0.8 Nm	50	CA745/2	0.8 Nm	50
	3	CA725/3		20	CA745/3		20
	4	CA725/4		20	CA745/4		20
	10	CA725/10		10	CA745/10		10
CTS35UN	2	CA771/2	0.8 Nm	50	CA781/2	0.8 Nm	50
	3	CA771/3		20	CA781/3		20
	4	CA771/4		20	CA781/4		20
	10	CA771/10		10	CA781/10		10
CMT4 CMB4 CDL4U CDL4U(I.S) ODL4U	2	CA727/2	0.4 Nm	100	CA747/2	0.4 Nm	100
	3	CA727/3		100	CA747/3		100
	4	CA727/4		100	CA747/4		100
	10	CA727/10		10	CA747/10		10
	100 <sup>2</sup>						
CSDL4U <sup>1</sup> DDFL4U / 4U(E) DDDL4U	2	CA729/2	0.5 Nm	100	CA749/2	0.5 Nm	100
	3	CA729/3		50	CA749/3		50
	4	CA729/4		50	CA749/4		50
	10	CA729/10		10	CA749/10		10
CSFL4U <sup>1</sup> CSFL4U(L) <sup>1</sup> CF4U <sup>1</sup> / CF4U(L) <sup>1</sup>	2						
	3						
	4						
	10						
CAFL4U <sup>1</sup> CAFL4U(L) <sup>1</sup>	2						
	3						
	4						
	10						
CTL2.5U CTL2.5UH CTL2.5UL CTL2.5UHL CTL2.5U(I.S)	2	CA722/2	0.4 Nm	100			
	3	CA722/3		50			
	4	CA722/4		50			
	10	CA722/10		10			
	100 <sup>2</sup>	CA722/100		10			
	10(breakable)						

**Insulated External Shorting Links**



Part No.	Torque	Std. Pack
CA717/2	0.4 Nm	100
CA717/3		100
CA717/4		100
CA717/10		20
CA713/2	0.5 Nm	100
CA713/3		100
CA713/4		100
CA713/10		20
CA710/2	0.8 Nm	100
CA710/3		50
CA710/4		50
CA710/10		20
CA718/2	0.8 Nm	100
CA718/3		50
CA718/4		50
CA718/10		20
CA714/2	0.5 Nm	100
CA714/3		100
CA714/4		100
CA714/10		20
CA711/2	0.8 Nm	100
CA711/3		50
CA711/4		50
CA711/10		20
CA716/2	0.8 Nm	50
CA716/3		50
CA716/4		50
CA716/10		20
CA715/2	0.4 Nm	100
CA715/3		100
CA715/4		100
CA715/10		20

**Permanent Shorting Links**



Part No.	Std. Pack
CA703/01	100
CA704/01	100
CA705/01	100
CA731/10	100
CA731/100	10
CA703/1	100
CA704/1	100
CA705/1	100
CA732/10	100
CA732/100	10
CA732/10-A	100
CA703/2	100
CA704/2	100
CA705/2	100
CA733/10	100
CA703/3	100
CA704/3	100
CA705/3	100
CA734/10	100
CA703/8	100
CA704/8	100
CA705/8	100
CA739/10	100
CA703/4	100
CA704/4	100
CA705/4	100
CA735/10	100
CA703/10	100
CA704/10	100
CA705/10	100
CA770/10	100
CA703/1	100
CA704/1	100
CA705/1	100
CA732/10	100
CA732/100	10
CA731/10-A	100
CA703/6	100
CA704/6	100
CA705/6	100
CA737/10	100
CA703/1	100
CA704/1	100
CA705/1	100
CA732/10	100
CA732/100	10
CA732/10-A	100

**Shorting Sleeves & Screws**



Part No.	Torque	Std. Pack
CA707/S/Q/01	0.4 Nm	100
CA707/S/Q/01	0.4 Nm	100
CA707/S/Q/1	0.5 Nm	100
CA707/S/Q/1	0.5 Nm	100
CA707/S/Q/1	0.8 Nm	100
CA707/S/Q/2	0.8 Nm	100
CA707/S/Q/2	0.8 Nm	100
CA607/S/Q	0.4 Nm	100
CA707/S/Q/3	0.5 Nm	100
CA707/S/Q/01	0.4 Nm	100

# SCREW CLAMP TERMINAL BLOCK SHORTING LINKS

## Shorting / Bridging System for Polyamide Screw Clamp Terminal Blocks

The shorting systems bridge potentials between terminal blocks, reducing wiring time. Adjacent blocks or selective terminal blocks within an assembly can be easily interconnected, leaving terminal clamps free for wiring. Preassembled shorting links, which are ready for installation, are used for quick shorting or individual components can be selected to create custom or extra long shorting links. The current carrying capacity of shorting systems is lower than the rated current of the respective Terminal Blocks, therefore applied current must not exceed the maximum current value (IEC/EN) of the Terminal Block.

### Preassembled Internal shorting link assemblies

Internal shorting link Assemblies consist of a Current Bar, Shorting Sleeves and screws. They install easily into the center of the terminal block and connect to the current bar. They are available as standard 2, 3, 4, 10 or 100 pole assemblies and are ready for immediate installation. Insulated preassembled internal shorting link assemblies provide shock protection when installed on Terminal Blocks.

### Insulated External Shorting Links

External shorting links bridge potentials between terminal blocks, reducing wiring time. Adjacent or selected blocks within an assembly can be easily interconnected. Individual links may be removed for selective shorting. These are insulated and available in 2, 3, 4 and 10 pole versions. They are made of tin plated brass/copper. Insulated External Link must be tightened to the recommended torque specified to get a reliable connection.

### Permanent Shorting Links

Shorting Links are used to create custom shorting assemblies for increased number of poles. The current bar with the required number of poles can be selected, or can be cut in the field to the required length. They are made of tin or nickel plated copper or brass.

### Shorting Sleeves & Screws

Shorting Sleeves & Screws ensure reliable and mechanically safe electrical connections between shorting links and the Terminal Block current bars. One shorting sleeve is required for each shorted Terminal Block. They are made of nickel plated brass. Shorting Sleeve and Screws are supplied with spring washer. The shorting screws must be tightened to the recommended torque specified to get a reliable connection.

## Pre Assembled Shorting Link




## Insulated Pre Assembled Shorting Links



Terminal Series	Poles	Part No.	Torque	Std. Pack	Part No.	Torque	Std. Pack
CTS4USC CHV4U	2	CA623/2	0.4 Nm	100	CA643/2	0.4 Nm	100
	3	CA623/3		100	CA643/3		100
	4	CA623/4		100	CA643/4		100
	10	CA623/10		10	CA643/10		10
CTS6USC CHV6U	2	CA624/2	0.5 Nm	100	CA644/2	0.5 Nm	100
	3	CA624/3		50	CA644/3		50
	4	CA624/4		50	CA644/4		50
	10	CA624/10		10	CA644/10		10
CTS10USC CHV10U	2	CA625/2	0.5 Nm	100	CA645/2	0.5 Nm	100
	3	CA625/3		50	CA645/3		50
	4	CA625/4		50	CA645/4		50
	10	CA625/10		10	CA645/10		10
CDGL2.5 CTGL2.5	2	CA627/2	0.4 Nm	100			
	3	CA627/3		100			
	4	CA627/4		100			
	10	CA627/10		10			
PTB35/50 PTB35/50SH (Bolt type Shorting System)	2	CA703/9	3.0 Nm	10			
	3	CA704/9		10			
	4	CA705/9		10			
PTB70/95 PTB70/95SH (Bolt type Shorting System)	2	CA703/11	6.0 Nm	10			
	3	CA704/11		10			
	4	CA705/11		10			
CTS50/70N CTS50/70NA	2	CA628/2	3.0 Nm	10			
	3	CA628/3		10			
CTS95/120N	2	CA629/2	6.0 Nm	10			
	3	CA629/3		10			
CSB3U/N3U CSB3/N3UL CSB3U	2	CA728/2	0.4 Nm	100			
	3	CA728/3		100			
	4	CA728/4		100			
	10	CA728/10		10			
CBS4U CSB4/N4U CBS5U CSB5/N5U	2	CA772/2	0.4 Nm	100			
	3	CA772/3		100			
	4	CA772/4		100			
	10	CA772/10		10			
STH3	2	CA773/2	0.4 Nm	100			
	3	CA773/3		100			
	4	CA773/4		100			
	10	CA773/10		10			
STH3	2	CA774/2	0.4 Nm	100			
	3	CA774/3		100			
	4	CA774/4		100			

Insulated External Shorting Links



Permanent Shorting Links






Shorting Sleeves & Screws



Part No. Torque Std. Pack

Part No. Torque Std. Pack








Part No. Torque Std. Pack



CA715/2 0.4 Nm 100  
 CA715/3 100  
 CA715/4 100  
 CA715/10 20

CA703/1 100  
 CA704/1 100  
 CA705/1 100  
 CA732/10 100

CA611/S/Q 0.4 Nm 100



# MELAMINE TERMINAL BLOCK SHORTING LINKS

## Preassembled Internal shorting link assemblies

Internal shorting link Assemblies consist of a Current Bar, Shorting Sleeves and screws. They install easily into the center of the Terminal Block and connect to the current bar. They are available as standard 2, 3, 4, 10 or 100 pole assemblies and are ready for immediate installation. Preassembled Insulated internal shorting link assemblies provide shock protection when installed on Terminal Blocks.

## Permanent Shorting Links

These are used to create custom shorting assemblies for increased number of poles. The current bar with the required number of poles can be selected, or can be cut in the field to the required length. They are made of tin or nickel plated copper or brass.

## Shorting Sleeves & Screws

Shorting Sleeves & Screws ensure reliable and mechanically safe electrical connections between shorting link and the Terminal Block current bars. One shorting sleeve is required for each shorted Terminal Block. They are made of nickel plated brass.

## Switchable Shorting Links and Long Shorting Sleeves for temporary shorting

These links are used for switchable cross connection of adjacent Terminal Blocks of the same size. They can be used only in conjunction with the Long Shorting Sleeves and Screws.

# STUD TYPE TERMINAL BLOCK SHORTING LINKS

## Shorting / Bridging System for Stud type Terminal Blocks

### Fork Type Shorting Links

These links have a possibility of quick insertion and removal. The entire nut assembly of the Terminal Block need not be removed for the insertion or removal of these links. They are available in standard 2, 3 or 4 pole configurations. They are also available in an insulated version which provides shock protection when installed on Terminal Blocks.

### Ring Type Shorting Links

These links provide a secure, permanent shorting possibility for stud type Terminal Blocks. They are available in standard 2, 3 or 4 pole configurations. They are also available in an insulated version which provides shock protection when installed on Terminal Blocks.

## Pre Assembled Shorting Link



## Insulated Pre Assembled Shorting Link



Terminal Series	Poles	Part No.	Torque	Std. Pack	Part No.	Torque	Std. Pack
CTS2.5(M)	2	CA521/2	0.4 Nm	100	CA621/2	0.4 Nm	100
	3	CA521/3		100	CA621/3		100
	4	CA521/4		100	CA621/4		100
	10	CA521/10		10	CA621/10		10
CTS2.5 CTS4SC	2	CA522/2	0.4 Nm	100	CA622/2	0.4 Nm	100
	3	CA522/3		100	CA622/3		100
	4	CA522/4		100	CA622/4		100
	10	CA522/10		10	CA622/10		10
CTS6 CTS6SC	2	CA723/2	0.5 Nm	100	CA743/2	0.5 Nm	100
	3	CA723/3		50	CA743/3		50
	4	CA723/4		50	CA743/4		50
	10	CA723/10		10	CA743/10		10
CTS10	2	CA724/2	0.5 Nm	100	CA744/2	0.5 Nm	100
	3	CA724/3		50	CA744/3		50
	4	CA724/4		50	CA744/4		50
	10	CA724/10		10	CA744/10		10
CTS16	2	CA751/2	0.8 Nm	50	CA761/2	0.8 Nm	50
	3	CA751/3		50	CA761/3		50
	4	CA751/4		50	CA761/4		50
	10	CA751/10		10	CA761/10		10
CTS35	2						
	3						
	4						
	10						

## Fork Type Shorting Link



## Insulated Fork Type Shorting Link



Terminal Series	Poles	Part No.	Torque	Std. Pack	Part No.	Torque	Std. Pack
CSTSB3	2	CA512/5-2	0.5 Nm	100	CA514/5-2	0.5 Nm	100
	3	CA512/5-3		50	CA514/5-3		50
	4	CA512/5-4		50	CA514/5-4		50
CSTSB4 / CSTSB5 CSTSB4N4 CMDT4 / CMDT4SH	2	CA512/2-2	1.2 Nm	100	CA514/2-2	1.2 Nm	100
	3	CA512/2-3		50	CA514/2-3		50
	4	CA512/2-4		50	CA514/2-4		50
CSTSN4/N5 CSTSN4U/N5U CSTSB4U/B5U CBS4U/CSB4/N4U CBS5U/CSB5/N5U	2	CA512/1-2	1.2 Nm	100	CA514/1-2	1.2 Nm	100
	3	CA512/1-3		50	CA514/1-3		50
	4	CA512/1-4		50	CA514/1-4		50
	2	CA512/7-2	1.2 Nm	100	CA514/7-2	1.2 Nm	100
CSTSN6 CSTSN6U	3	CA512/7-3		50	CA514/7-3		50
	4	CA512/7-4		50	CA514/7-4		50
	2	CA512/9-2	1.2 Nm	100	CA514/9-2	1.2 Nm	100
CSTSN4(15) CSTSN5(15)	3	CA512/9-3		50	CA514/9-3		50
	4	CA512/9-4		50	CA514/9-4		50
CSTSRN5/RN6	2	CA512/11-2	1.2 Nm	50	CA514/11-2	1.2 Nm	50
STH4 STH4DT STH4DTSH	2	CA512/13-2	1.2 Nm	100	CA514/13-2	1.2 Nm	100
	3	CA512/13-3		50	CA514/13-3		50
	4	CA512/13-4		50	CA514/13-4		50
STH3/CSB3/ N3U CSB3U	2	CA512/15-2	0.5 Nm	100	CA514/15-2	0.5 Nm	100
	3	CA512/15-3		50	CA514/15-3		50
	4	CA512/15-4		50	CA514/15-4		50

**Permanent Shorting Links**



Part No.	Std. Pack.
CA503/01	100
CA504/01	100
CA505/01	100
CA510/01	100

**Short Sleeves & Screws**



Part No.	Torque	Std. Pack.
CA507/S/Q/01	0.4 Nm	100

**Switchable Shorting Links**



Part No.	Std. Pack.
CA506/01	100

**Long Sleeves & Screws**



Part No.	Torque	Std. Pack.
CA507/L/Q/01	0.4 Nm	100

CA503/1	100
CA504/1	100
CA505/1	100
CA510/1	100

CA707/S/Q/1	0.4 Nm	100
-------------	--------	-----

CA506/1	100
---------	-----

CA707/L/Q/1	0.4 Nm	100
-------------	--------	-----

CA703/2	100
CA704/2	100
CA705/2	100
CA733/10	100

CA707/S/Q/1	0.5 Nm	100
-------------	--------	-----

CA706/2	100
---------	-----

CA707/L/Q/1	0.5 Nm	100
-------------	--------	-----

CA703/3	100
CA704/3	100
CA705/3	100
CA734/10	100

CA707/S/Q/1	0.5 Nm	100
-------------	--------	-----

CA706/3	100
---------	-----

CA707/L/Q/1	0.5 Nm	100
-------------	--------	-----

CA703/8	100
CA704/8	100
CA705/8	100
CA739/10	100

CA707/S/Q/1	0.8 Nm	100
-------------	--------	-----

CA706/8	100
---------	-----

CA707/L/Q/1	0.8 Nm	100
-------------	--------	-----

CA503/5	100
CA504/5	100
CA505/5	100
CA510/5	100

CA508/S/Q	0.8 Nm	100
-----------	--------	-----

CA506/5	100
---------	-----


CA508/L/Q	0.8 Nm	100
-----------	--------	-----

**Ring Type Shorting Links**



Part No.	Torque	Std. Pack.
CA512/6-2	0.5 Nm	100
CA512/6-3		50
CA512/6-4		50
CA512/4-2	1.2 Nm	100
CA512/4-3		50
CA512/4-4		50

**Insulated Ring Type Shorting Links**



Part No.	Torque	Std. Pack.
CA514/6-2	0.5 Nm	100
CA514/6-3		50
CA514/6-4		50
CA514/4-2	1.2 Nm	100
CA514/4-3		50
CA514/4-4		50

**Insulated Ring Type Alternate Links**



Part No.	Torque	Std. Pack.
CA514/3-2	1.2 Nm	100
CA514/3-3		50
CA514/3-4		50

CA512/3-2	1.2 Nm	100
CA512/3-3		50
CA512/3-4		50

CA514/3-2	1.2 Nm	100
CA514/3-3		50
CA514/3-4		50

CA512/8-2	1.2 Nm	100
CA512/8-3		50
CA512/8-4		50

CA514/8-2	1.2 Nm	100
CA514/8-3		50
CA514/8-4		50

CA512/10-2	1.2 Nm	100
CA512/10-3		50
CA512/10-4		50

CA514/10-2	1.2 Nm	100
CA514/10-3		50
CA514/10-4		50

CA512/12-2	1.2 Nm	50
------------	--------	----

CA514/12-2	1.2 Nm	50
------------	--------	----

CA512/14-2	1.2 Nm	100
CA512/14-3		50
CA512/14-4		50

CA514/14-2	1.2 Nm	100
CA514/14-3		50
CA514/14-4		50

CA514/14-3A	1.2 Nm	10
CA514/14-4A		10

CA512/17-2	0.5 Nm	100
CA512/17-3		50
CA512/17-4		50


CA514/17-2	0.5 Nm	100
CA514/17-3		50
CA514/17-4		50



# CX, CSC, CY, AS SERIES TERMINAL BLOCK SHORTING LINKS



The possibility of using 2 independent rows for bridging enables the creation of various circuit combinations. Shorting links can be marked with a felt tip pen on the recess provided on top, to clearly indicate shorted positions.

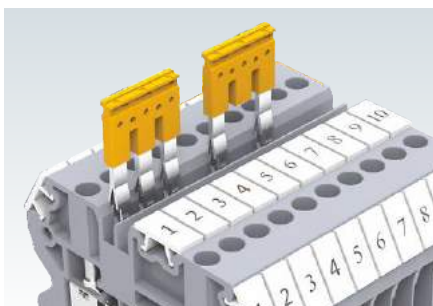


Individual Terminal Blocks in an assembly can be skipped from getting shorted with the adjacent terminal. This is achieved by breaking intermediate contacts from the standard shorting link.



Terminal Block		Part No.	I <sub>max</sub>	Std. Pack.
CP1.5 & CPG1.5 Series	2 pole	JX1.5/2	16 A	100
CP1.5/3, CP1.5/4 Series	3 pole	JX1.5/3	16 A	50
CPG1.5/3, CPG1.5/4 Series	4 pole	JX1.5/4	16 A	50
CPDL1.5 Series	10 pole	JX1.5/10	16 A	10
CX2.5, CXG2.5 Series CXDL, CXDLG2.5 Series CXK2.5 Series CXM2.5, CXMG2.5	2 pole	JX2.5/2	24 A	100
	3 pole	JX2.5/3	24 A	50
	4 pole	JX2.5/4	24 A	50
	5 pole	JX2.5/5	24 A	50
	6 pole	JX2.5/6	24 A	10
	7 pole	JX2.5/7	24 A	10
CX4, CXG4 Series CXF, CXVF Series CXK4 Series CYF, CYK, CYDLK Series	8 pole	JX2.5/8	24 A	10
	10 pole	JX2.5/10	24 A	10
	2 pole	JX4/2	32 A	100
	3 pole	JX4/3	32 A	50
CX6, CXG6 Series CXDB Series	4 pole	JX4/4	32 A	50
	8 pole	JX4/8	32 A	10
	10 pole	JX4/10	32 A	10
	2 pole	JX6/2	41 A	100
CX10, CXG10 Series	3 pole	JX6/3	41 A	50
	4 pole	JX6/4	41 A	50
	10 pole	JX6/10	41 A	10
	2 Pole	JX10/2	57 A	20
ATL Series	2 pole	CA801/A2	24 A	100
	3 pole	CA801/A3	24 A	100
	4 pole	CA801/A4	24 A	100
	10 pole	CA801/A10	24 A	10
CSC16T	2 Pole	CA801/5	76 A	100
CSCP2.5T Series	2 Pole	CA803/1	24 A	100
AS2.5 Series	2 Pole Adjacent	CA801/1	24 A	100
	2 Pole Alternate	CA801/1-3	24 A	100
	2 Pole Wire Type	CA901/1	17.5 A	100
AS4 Series	2 Pole Adjacent	CA801/2	20 A	100
	2 Pole Alternate	CA801/2-3	20 A	100
	2 Pole Wire Type	CA901/2	17.5 A	100
AS6 Series	2 Pole Adjacent	CA801/3	35 A	100
	2 Pole Alternate	CA801/3-3	30 A	100
	2 Pole Wire Type	CA901/3	30 A	100

## Step Down Shorting Links

These Links help in shorting Spring Clamp Terminal Blocks of different sizes. CA801/8 and JXS shorting link are used for shorting adjacent Terminal Blocks of different series.

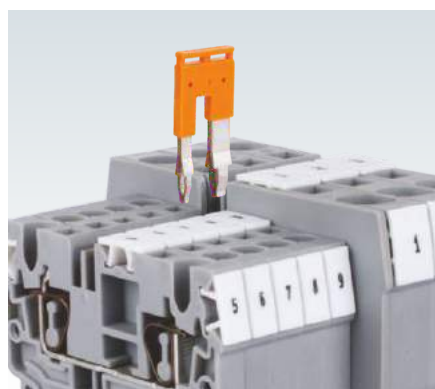

Terminal Block	Part No.	I <sub>max</sub>	Std. Pack.
CX4 to CX2.5 Series Terminals	JXS4/2.5	24 A	50
CX6 to CX2.5 Series Terminals	JXS6/2.5	24 A	50
CX6 to CX4 Series Terminals	JXS6/4	32 A	50
CX10 to CX2.5 Series Terminals	JXS10/2.5	24 A	50
CX10 to CX6 Series Terminals	JXS10/6	24 A	50
AS6 Series to AS2.5 Series	CA801/8	24 A	100
AS6 Series to AS4 Series (Wire Type)	CA901/4	30 A	100
AS6 Series to AS2.5 Series (Wire Type)	CA901/5	24 A	100
AS4 Series to AS2.5 Series (Wire Type)	CA901/6	24 A	100

## END PLATES

End Plates are used to cover the live parts of the last Terminal Block. They should be used at the end of an assembly of identical Terminal Blocks and whenever is changed in physical size of the Terminal Block.



Part No.	Std. Pack	Dimension (H x W x T)	Suitable for
EP2.5/4UN	50	32 x 39 x 1.5	CTS2.5UN/2.5UE/4UN/CTT2.5UK/T/J/E
EP6/10U	50	31 x 42.5 x 1.5	CTS6U/CTS10U
EPCMC1-2	50	35.5 x 46.5 x 2.5	CMC1-2
EPCMC2-2	50	40.5 x 65 x 2.5	CMC2-2
EPCDL4UN	50	47.5 x 57 x 1.5	CDL4UN/CDL4UN(I.S)
EPODL4U	50	49 x 68 x 5.5	ODL4U/ODL4UA(Front Side)
EP1ODL4U	50	24 x 68 x 3	ODL4U/ODL4UA(Back Side)
EPODL2.5	50	55 x 59 x 4.6	ODL2.5 Series
EP1ODL2.5	50	24 x 59 x 2.5	ODL2.5 Series
EPCDGL2.5	50	48 x 71.4 x 1.2	CDGL2.5
EPCTL2.5U	50	55.5 x 84 x 1.5	CTL2.5U/2.5UL/2.5U(I.S)
EPCTL2.5UH	50	55.5 x 61 x 1.5	CTL2.5UH/2.5UH(L)/2.5UH(I.S)D2
EPCTLG2.5	50	62.5 x 87.5 x 1.2	CTGL2.5/CTGL2.5(E)MOV
EPCMT4	50	23 x 27 x 1.5	CMT4
EPCMB4	50	27 x 27 x 7	CMB4
EPCBS3U	50	26.2 x 49 x 1.5	CBS & CSB Series
EPCAF4U	25	32 x 72 x 1.5	CAFL4U/4UL/4UN
EPDDFL4U	25	49 x 87.6 x 3	DDFL4U/4ULR/4U(E)/4U(E)LR
EPCDTTU	50	41 x 63 x 3	CDTTU/CDTTUSH
EPCKT4U	50	30.5 x 46.5 x 2.5	CKT4U
EPCKT4U/4	50	65 x 38.3 x 1.5	CKT4U/4
EPCDS6U	50	37.2 x 82 x 1.5	CDS6U/6UTS/6UFT/6USC
EPCGT4U	50	40.5 x 43 x 1	CGT4U
EPUSC	50	52 x 48.5 x 1.5	CTS4USC/6USC/10USC/CHV4U/6U/10U
EPCTC4U	50	34.5 x 47 x 2.5	CTC4U
EPCSTSU	50	31 x 50 x 1.5	CSTSN4U/N5U/N6U/B4U/B5U
EPSTH3	50	34.4 x 47 x 1.5	STH3
EPSTH4	50	39.5 x 46 x 1.5	STH4
EPSTH6	50	51 x 63.5 x 2	STH6
EPSTH4DT	50	37.5 x 86 x 1.5	STH4DT / STH4DTSH
EPCSC16T	50	82 x 38 x 1.5	CSC16T/CSCG16T
EPCSCP2.5T(L&R)	50	27.3 x 35 x 5	CSCP2.5T/CSCP2.5T2
EPAS2.5	50	35 x 54 x 1.5	AS2.5, 2.5/3, 2.5/4, AGT2.5, 2.5/3, 2.5/4
EPAS4	50	27.5 x 61 x 1.5	AS4, 4/3, 4/4, AGT4, 4/3, 4/4
EPAS6	50	33.5 x 74 x 1.5	AS6, 6/3, AGT6, 6/3
EPADLG2.5	50	83.75 x 58 x 1.2	ADLG2.5
EPATL2.5	50	100 x 69.7 x 1.2	ATL2.5
EPATL2.5H	50	77.3 x 69.7 x 1.2	ATL2.5H
EPATLG2.5	50	100 x 68.75 x 1.2	ATLG2.5
CTSEP01	50	31 x 36.5 x 1.8	CTS2.5(M)
CTSEP1	50	49 x 40 x 2.7	CTS2.5/6/10/4SC/6SC
CTSEP2	50	54 x 49.5 x 3	CTS16
CTSEP3	25	52 x 58 x 2.7	CTS35
CTSEP1SC	50	43.5 x 50 x 2.5	CTS10SC
CSTSEP2	50	44.5 x 50 x 3	CSTSB3/B4/B5/N4/N5/N4(15)/N5(15)/N6
CSTSRP	50	48.5 x 43 x 3	CSTSRN5/CSTSRN6
EPCMDT4	50	48.7 x 68 x 2.4	CMDT4/CMDT4SH
EPCX2.5	50	30.5 x 49.7 x 1.5	CX2.5 / CXG2.5
EPCX2.5/3	50	30.5 x 62.2 x 1.5	CX2.5/3 / CXG2.5/3 / CXK2.5
EPCX2.5/4	50	30.5 x 74.7 x 1.5	CX2.5/4 / CXG2.5/4 CXK2.5/4 / CX2.5/4P
EPCX4	50	30.5 x 54.8 x 1.5	CX 4 / CXG4
EPCX4/3	50	30.5 x 70.5 x 1.5	CX4/3 / CXG4/3 / CXK4
EPCX4/4	50	30.5 x 86.2 x 1.5	CX4/4 / CXG4/4 / CXK4/4
EPCX6	50	35.3 x 62.1 x 1.5	CX6 / CXG6
EPCX6/3	50	35.3 x 82.2 x 1.5	CX6/3 / CXG6/3
EPCX10	50	41.6 x 70 x 1.5	CX10 / CXG10
EPCX10/3	50	41.6 x 95.3 x 1.5	CX10/3 / CXG10/3
EPCXDL2.5	50	41.8 x 72.7 x 1.5	CXDL2.5 Series
EPCXS2.5	50	35.6 x 43 x 1.5	CXS2.5 / CXSG2.5 / CXS4 / CXSG4
EPCM1.5S	50	18 x 26.5 x 12	CM1.5S / CM1.5S2
EPCM2.5S	50	20 x 30 x 12.45	CM2.5S / CM2.5S2
EPCM4S	50	23 x 33.7 x 14.5	CM4S / CM4S2
EPCMS2.5	50	25 x 31 x 1.5	CMS2.5
EPCX2.5SN	50	36.8 x 15.9 x 0.5	CX2.5SN
EPCXM2.5	50	29.5 x 37 x 1.5	CXM2.5 / CXMG2.5
EPCXCP2.5	50	27.3 x 35 x 3	CXCP2.5/4
EPCP3L2.5	30	98.70 x 83 x 1.5	CP3L2.5 Series
EPCP4LG2.5	30	118.6 x 93 x 1.5	CP4LG2.5
EPCP1.5	50	26.35 x 45.3 x 1.5	CP1.5 / CPG1.5
EPCP1.5/3	50	26.35 x 54.4 x 1.5	CP1.5/3 / CPG1.5/3
EPCP1.5/4	50	26.35 x 63.5 x 1.5	CP1.5/4 / CPG1.5/4
EPCPDL1.5	50	37.55 x 67.2 x 1.5	CPDL1.5 Series
EPCPDLK2.5	50	107 x 38.1 x 1.5	CPDLK2.5 Series
EPCPPT2.5/3	50	79.8 x 40.3 x 1.5	CPPT & CPST Series
EPCPPT2.5/3	50	96.5 x 40.3 x 1.5	CPPT & CPST Series
EPCYDL2.5/4	50	58.1 x 69.5 x 1.5	CYDL Series
RBCP8L32	50	59.5 X 35.8 X 8.1	CP8L32 & CP8L32(I.S)

# PARTITION & SEPARATOR PLATES

## PARTITION PLATES

Partition Plates are used to segregate different groups of Terminal Blocks and provide the required creepage and clearance values in an assembly. Partition Plates electrically isolate adjacent shorting links. They also provide a separation between Terminal Blocks of different potentials.

For visual separation of different circuits, a choice of coloured End Plates and Partition Plates are also available.

Part No.	Std. Pack	Dimension (H x W x T)	Suitable for
PP2.5/4UN	50	37 x 44 x 1.6	CTS2.5UN/2.5UE/4UN/CTT2.5UK/T/J/E
PP6/10U	50	37.5 x 56 x 1.5	CTS6U/CTS10U
PP25UN	50	42.5 x 62 x 1	CTS25UN
PP35UN	50	50 x 64.5 x 1	CTS35UN
PPCMT4	50	32 x 37 x 1.6	CMT4
PPCSFL4U	50	42.5 x 62 x 1.5	CSFL4U/4U(L)/CSDL4U
CTSPP01	50	43.5 x 49 x 2.3	CTS2.5(M)
CTSPP1L	50	63 x 40 x 2.8	CTS2.5/6/10/4SC/6SC
CTSPP1B	50	60 x 55 x 3	CTS2.5/6/10/4SC/6SC
CTSPP2	50	66.5 x 66 x 3	CTS16
CTSPP3	25	59 x 67.5 x 3	CTS35
CTSPP1SC	50	48 x 60 x 3	CTS10SC
CMSTPP	50	23 x 27 x 1.5	CMST1/CMST2
CSTSPP	20	53 x 60 x 3	CSTSB3/B4/B5/N4/N5/N4(15)/N5(15)/N6
EP4P	10	70 x 160 x 2	CTS35L/70L/95L/35LS/70LS/95LS
CTSEP4	50	5 x 120 x 2.5	CTS35L/70L/35LS/70LS
PPCBB	10	45 x 120 x 2	CBB35/50 / CBB70 / CBB95
PPCBB1	10	65 x 180 x 2	CBB120 / CBB150 / CBB185
PPCX4	50	42.4 x 59 x 2	CX2.5 / CXG2.5 / CX4 / CXG4
PPCX4/3	50	42.4 x 74.7 x 2	CX2.5/3 / CXG2.5/3 / CXK2.5 / CXK4/3 / CXK4
PPCX4/4	50	42.4 x 95 x 2	CX2.5/4 / CXG2.5/4 / CX4/4 / CXK4/4
PPCX10	20	53.5 x 76 x 2	CX6 / CX10
PPCYDL2.5/4	20	70.1 x 79.5 x 2	CYDL Series




## SEPARATOR PLATES

Separator Plates are used for electrical separation of adjacent shorting links without the use of additional space. They can be inserted after the Terminal Blocks have been assembled on the DIN rail.

Part No.	Std. Pack	Dimension (H x W x T)	Suitable for
SP2.5/4UN	100	17.5 x 17.4 x 1.4	CTS2.5UN/2.5UE/4UN/CTT2.5UK/T/J/E
SP6/10U	100	15.4 x 16.2 x 1.5	CTS6U/CTS10U/CTS16U
SPCDL4U	100	15.4 x 16.2 x 1.6	CDL4U/4UN/CDL4U(I.S)/4UN(I.S)
SPCMB4	100	14.5 x 12 x 1.5	CMB4
SPCDLG2.5	100	11 x 10.5 x 1	CDGL2.5
SPCP8L32	10	83.2 x 120 x 3.5	CP8L32 & CP8L32(I.S)

## PROTECTIVE COVERS

For protection against dust and shock, transparent protective covers can be installed above the Terminal Block assembly. The protective cover is held in place with the help of a fixing nut on the support plate CSP1. Support Plate CSP1 can be mounted on all DIN rails. It is advised to use standard end clamps / stops to hold the CSP1 in place.

Protective Covers			Support Plate	
				
Part No.	Length	Std. Pack	Part No.	Std. Pack
CTSPC(40mm)	40 mm	10	CSP1	100
CTSPC(90mm)	90 mm	10	CSP2	100
CTSPC(100mm)	100 mm	10		
CTSPC(130mm)	130 mm	10		
CTSPC(150mm)	150 mm	10		
CTSPC(200mm)	200 mm	10		
CTSPC(240mm)	240 mm	10		
CTSPC(300mm)	300 mm	10		
CTSPC(330mm)	330 mm	10		
CTSPC(430mm)	430 mm	10		
CTSPC(460mm)	460 mm	10		
CTSPC(760mm)	760 mm	10		



# PROFESSIONAL TOOLS

In order to have secure connections, not only it is important to use good quality terminal blocks but also correct tools for securing these connections. Connectwell has a range of ergonomically designed professional tools for all your wiring needs. The tri-moulded handles of these screwdrivers allow the users to exert 50% additional torque over conventional screwdrivers. All this and more to ensure that you have The Right Connection.



## Tri-Molded PROFESSIONAL Screwdrivers

### Material 1



Specially formulated hard material prevents blades from turning. Handles are injection moulded around blades for maximum strength and durability.

### Material 2




Soft TPE material, specially formulated for best torque transmission. It has an integrated diamond pattern area for better hand grip and air ventilation between the hand and the handle.

### Material 3




Specially formulated reinforced material, impact resistant even at lower temperatures to prevent handle damage.

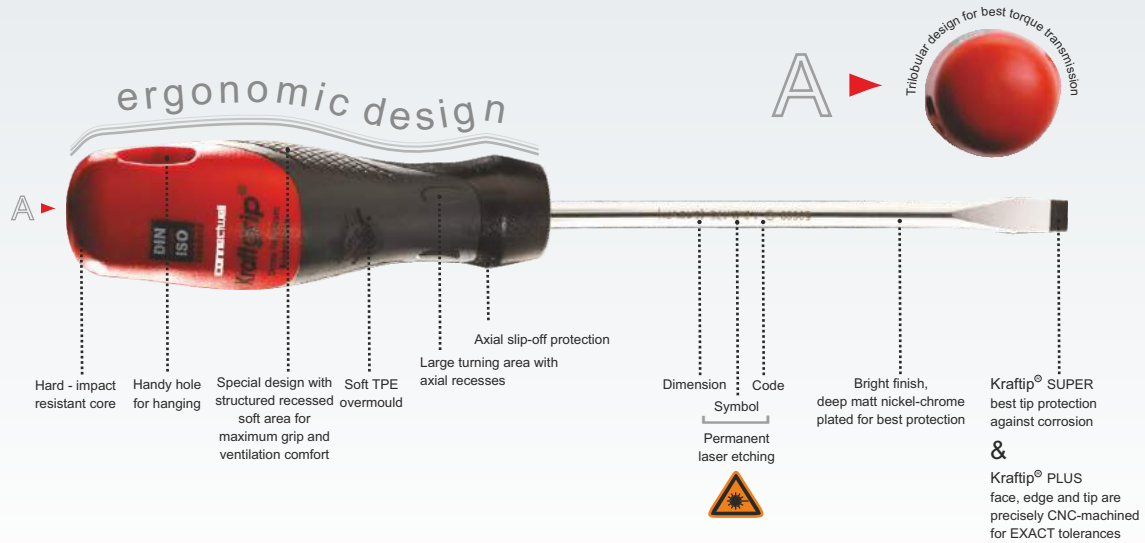

## Electrician's Screwdrivers


**Application:** for slotted screws ISO 2380  
**Blade type:** round blade, high-grade chrome-vanadium-molybdenum steel, chrome plated  
**Tip:** Kraftip Plus black tip, ISO 2380-1  
**Handle:** Three component handle, Kraftgrip 50000R




Cat. No.	EAN	⌀	↕	A	B	C	↔	Pack Pcs.
SCS0.5/3	6	0.5	3.0	100	85	185	3.0	10
SCS0.6/3.5	3	0.6	3.5	100	85	185	3.5	10
SCS0.8/4	0	0.8	4.0	125	85	210	4.0	10
SCS1/5.5	7	1.0	5.5	150	100	250	5.5	10

## Electrician's Screwdrivers Insulated

**Application:** for slotted screws EN 60900:2004  
**Blade type:** round blade, insulated high-grade chrome-vanadium-molybdenum steel, black finish  
**Tip:** Kraftip Plus black tip, ISO 2380-1  
**Handle:** Three component handle, Kraftgrip 50000R



Cat. No.	EAN	⌀	↕	A	B	C	↔	Pack Pcs.
SCS0.5/3I	3	0.5	3.0	100	85	185	3.0	10
SCS0.6/3.5I	0	0.6	3.5	100	85	185	3.0	10
SCS0.8/4I	7	0.8	4.0	100	85	185	3.5	10
SCS1/5.5I	4	1.0	5.5	125	100	225	5.0	10

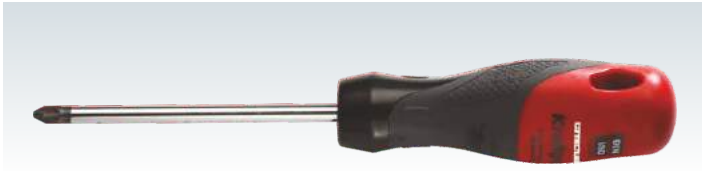

Application:


### Phillips Screwdrivers

Application: for Phillips Recess screws ISO 8764

Blade type: round blade, high-grade chrome-vanadium-molybdenum steel, chrome plated

Tip: Kraftip Plus black tip, ISO 8764-1

Handle: Three component handle, Kraftgrip 50000R



Cat. No.	EAN	+	A	B	C	→●←	Pack Pcs.	
SCPH1	5	PH	1	80	100	180	4.5	10
SCPH2	2	PH	2	100	110	210	6.0	10

AC 1000V




### Phillips Screwdrivers Insulated

Application: for Phillips Recess screws EN 60900:2004

Blade type: round blade insulated, high-grade chrome-vanadium-molybdenum steel, black finish

Tip: Kraftip Plus black tip, ISO 8764-1

Handle: Three component handle, Kraftgrip 50000R



Cat. No.	EAN	+	A	B	C	→●←	Pack Pcs.	
SCPH2I	2	PH	2	100	110	210	6.0	10




### Socket wrench-NUT DRIVER

Application: for hexagon headed screws, bolts and nuts DIN 3125

Blade type: round blade, with deep hexagonal socket, high-grade chrome-vanadium-molybdenum steel, chrome plated

Handle: Three component handle, Kraftgrip 50000



Cat. No.	EAN	⊙	Nut Size	A	B	C	→●←	Pack Pcs.
SCNT4	0	SW 4	M2	125	100	225	6	10
SCNT5	7	SW 5	M2.5	125	100	225	6	10
SCNT6	1	SW 6	M3	125	110	235	6	10




### Mechanic's Screwdrivers

Application: for slotted screws ISO 2380

Blade type: round blade, high-grade chrome-vanadium-molybdenum steel, chrome plated

Tip: Kraftip Plus black tip, ISO 2380-1

Handle: Three component handle, Kraftgrip 50000R



Cat. No.	EAN	⊖	⊕	A	B	C	→●←	Pack Pcs.
SCM0.4/2.5	5	0.4	2.5	75	85	160	2.5	10
SCM0.5/3	2	0.5	3.0	100	85	185	3.0	10
SCM0.8/4	6	0.8	4.0	100	85	185	4.0	10
SCM1/5.5	3	1.0	5.5	125	100	225	5.0	10


# DIN RAIL MOUNTED SOCKETS & SWITCHES



Connectwell DIN Rail mounted socket and switches offer a unique possibility of mounting an Industrial Socket and Switch on a standard DIN rail.

Sockets are available for various country standard plugs. These need to be wired and snapped inside the Din rail mounting frame as shown in the assembly diagram below.

This assembly then easily snaps on to a standard DIN rail.


Switches CDINSW1 & CDINSW2 are available in single and double pole configuration respectively.



Dimension W x L x H	53 x 82 x 60 mm	
Socket Housing Material	Polycarbonate	
DIN Rail Frame Material	ABS	
Wire Clamp & Contact Material	Brass	
<b>Electrical Data</b>		
Rated Connecting Capability	0.5 - 2.5 sq.mm	
Voltage Rating	250 V	
Current Rating	5 A	
Suitable for Plugs	Type C, Type D (Indian Standard BS546)	
Approvals	CE	
<b>DIN Rail Socket</b>		
Mounting Rail (Refer Pg. 216 for details)		CA701-1M / CA701-1M-S CA701-15-1M / CA701-15-1M-S
End Clamp (Refer Pg. 217 for details)		CA102 CA202
Applicable Countries *	Afghanistan, Bangladesh, India, Nepal, Nigeria, Pakistan, Qatar, Sri Lanka	
<b>Type / Cat. No.</b>		<b>Std. Pack</b>
CDINS6		5



## ASSEMBLY INSTRUCTIONS

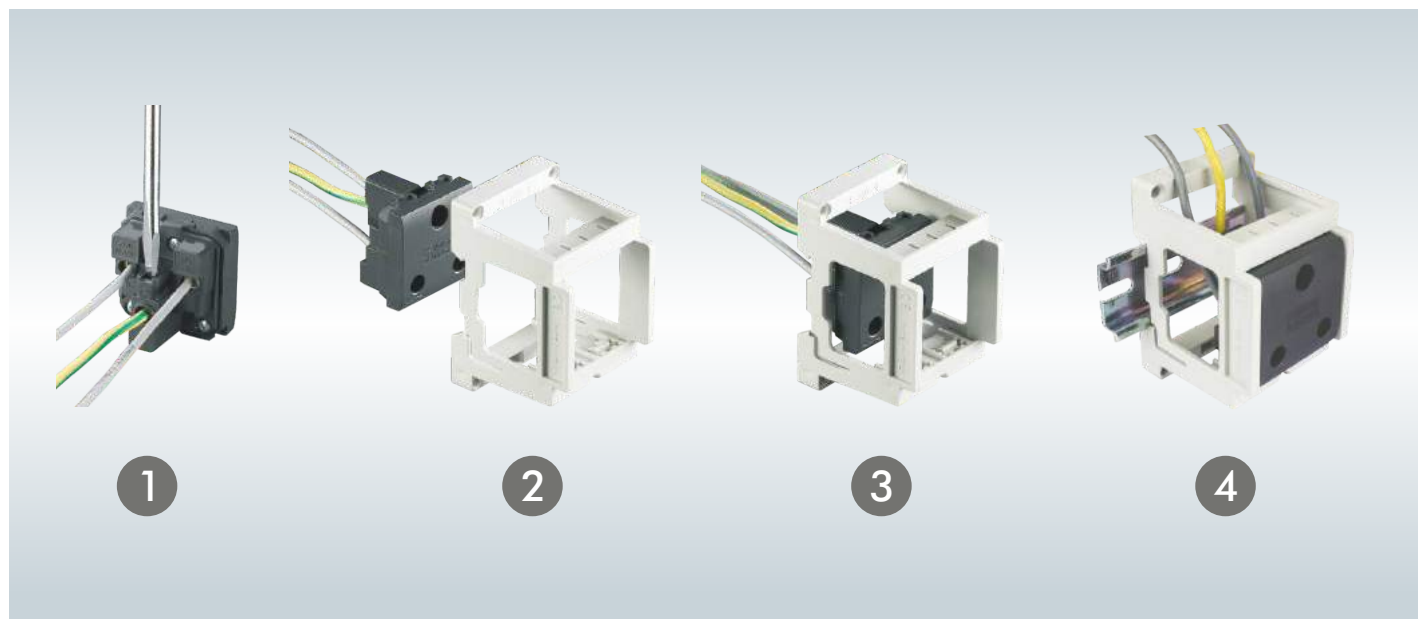

**CDINS16**



53 x 82 x 60 mm

Polycarbonate

ABS

Brass

0.5 - 2.5 sq.mm

250 V

13 A

Type M (South African Standard)



Type / Cat. No.	Std. Pack
CDINS16	5
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	50 m
CA102	50
CA202	50

Bangladesh, India, Nepal, Pakistan, Qatar, Sri Lanka, South Africa

**CDINSUK**



53 x 82 x 60 mm

Polycarbonate

ABS

Brass

0.5 - 2.5 sq.mm

250 V

13 A

Type G (UK Standard BS1363)



Type / Cat. No.	Std. Pack
CDINSUK	5
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	50 m
CA102	50
CA202	50

Bahrain, Hongkong, Iraq, Ireland, Jordan, Kenya, Kuwait, Lebanon, Macau, Malaysia, Mauritius, Myanmar, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, United Kingdom, Yemen, Zimbabwe

**CDINSD**



53 x 82 x 60 mm

Polycarbonate

ABS

Brass

0.5 - 2.5 sq.mm

250 V

13 A

Type F (Schuko)



Type / Cat. No.	Std. Pack
CDINSD	5
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	50 m
CA102	50
CA202	50

Algeria, Austria, Bosnia, Bulgaria, Finland, France, Germany, Greece, Hungary, Iceland, Indonesia, Italy, Jordan, Luxembourg, Monaco, Myanmar, Netherlands, Norway, Portugal, Romania, Serbia, Spain, Turkey

**CDINSW1**



Dimension W x L x H

Switch Housing Material

DIN Rail Frame Material

Wire Clamp & Contact Material

**Electrical Data**

Rated Connecting Capability

Voltage Rating

Current Rating

Number of Poles

Approvals

DIN Rail Socket

Mounting Rail (Refer Pg. 216 for details)



End Clamp (Refer Pg. 217 for details)



53 x 82 x 60 mm

Polycarbonate

ABS

Brass

0.5 - 2.5 sq.mm

250 V

16 A

1



Type / Cat. No.	Std. Pack
CDINSW1	5
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	50 m
CA102	50
CA202	50

**CDINSW2**



53 x 82 x 60 mm

Polycarbonate

ABS

Brass

0.5 - 2.5 sq.mm

250 V

16 A

2



Type / Cat. No.	Std. Pack
CDINSW2	5
CA701-1M / CA701-1M-S	50 m
CA701-15-1M / CA701-15-1M-S	50 m
CA102	50
CA202	50





## ATEX-IECEX Approved Terminal Blocks

---

The ATEX - IECEX Directive besides taking into account the electrical sources of explosion, also considers potentially explosive concentrations of gas, vapor or mist along with dust in the air.

**Note: When specific ATEX - IECEX / AEX / In Metro approved Terminal Blocks are required, please specifically mentioned this in your purchase orders. Such orders will be processed with due consideration.**

**Connectwell Terminal Blocks having ATEX - IECEX approval will be marked as follows:**

## ATEX-IECE<sub>x</sub> APPROVED TERMINAL BLOCKS

Condition of Safe Use – increased safety "e"

The Terminal Blocks are suitable to mount on DIN35/ DIN32/ DIN15 as applicable.  
The Terminal blocks are suitable for use in ATEX / IECEx certified enclosure with minimum IP rating of IP 54.

The terminal block has to be built into the enclosure with the type of protection "t" (complying with IEC/EN60079-31)" standard when placed in dust atmosphere.

The terminal blocks are suitable for maximum service temperature 85°C, considering the self-heating when used at rated current with specified maximum conductor size & at ambient temperature range of -40°C to +40°C at mounting position.

When the Terminal Blocks are used in electrical apparatus, the highest temperature of the insulating material shall not exceed the max value of the temperature 85 °C.

When these terminal blocks are mounted, the minimum creepage and clearance distances shall be maintained for respective voltage rating, with neighboring terminal blocks.

Proper care should be taken for stranded wire type of connection in terminal blocks, so that conductors do not get damaged while installation.

Installation instruction - Intrinsic Safety "i"

IEC/EN 60079-14 Clause 12 states Modular Terminal Blocks as simple apparatus when used in intrinsically safe circuits. Testing by a notified body and marking is not required. If Terminal Blocks are identified as part of an intrinsically circuit are marked by a colour, the colour used shall be light blue. Testing for compliance to intrinsically safe requirements including clearance, creepage, and solid insulation distances specified in IEC/EN 60079-0 and IEC/EN 60079-11 have been performed for circuits up to 60 V. Compliance with distance requirements of IEC/EN 60079-14 Clause 12.2.3 for the connection of separated intrinsically safe circuit accessories is met. A minimum distance of 50 mm to separate clamping units of intrinsically safe and non-intrinsically safe circuits is required by using a partition plate or spacer or similar device.

### Schedule of Limitations:

1) When these terminal blocks are mounted, the minimum creepage and clearance distances with neighbouring terminal blocks and between the current bar & DIN-Rail shall be maintained as per the table given below:-

VOLTAGE (V)	CREEPAGE(mm)	CLEARANCE(mm)
1250	22	18
1000	20	14
800	16	12
630	12	10
500	10	8
400	8	6
320	6.3	6

- 2) To avoid the risk of short-circuits between adjacent conductors in terminal blocks; the insulation of each conductor shall be maintained up to the metal of the terminal.
- 3) All terminal screws and nuts used shall be tightened down wherever applicable as per the torque values specified in the table on page 2.
- 4) When this product is intended to be used in a potentially explosive dust atmosphere, it shall be installed in an enclosure that is suitably certified for use in that environment.
- 5) The housing material of the terminal blocks is not rated for UV protection. The terminal blocks are not to be installed in an enclosure with a glass or transparent plastic window or cover unless suitable protected against direct sunlight.
- 6) When used in intrinsically safe circuits, the terminals shall not be used for voltages above 60 V peak.
- 7) Where the terminals of intrinsically safe and non-intrinsically safe circuits are in the same enclosure, measures shall be taken to maintain at least 50 mm separation, using a spacer or similar device. Alternatively, a partition meeting the requirements of the relevant code of practice (e.g. IEC 60079-14) shall be used.
- 8) When used as part of an intrinsically safe circuit, terminal blocks shall meet the requirements for a T4 temperature class at 85°C ambient.
- 9) When the device is mounted in a hazardous area, connection and disconnection of the device from the rail while live is only permitted if the potentially explosive atmosphere is shown to be absent. This restriction does not apply if the circuit is intrinsically safe.
- 10) When used as part of an intrinsically safe circuit, terminal blocks shall be marked with a light blue colour or otherwise indicated that the circuits are intrinsically safe.


### For Fuse & Disconnecting Terminal Block

- 11) The supply must be switched off before lifting the fuse carrier from base terminal. (Do not actuate the disconnecting knife or fuse carrier when energized). Do not replace or remove the fuse when energized.
- 12) Fuse terminals: The replacement fuses shall be, either FSF series manufactured by Schurter, or PSF series manufactured by Protection. The size of the fuse is Ø 5 X 20mm. The fuse shall be selected so that it is used within the manufacturers' ratings: breaking capacity, rated current and voltage rating. The rated current shall not exceed 6.3A.
- 13) Fuse terminals: The fuse shall not be removed or replaced when energized.
- 14) Ex ic fuse terminals shall only be mounted inside a suitably-certified flameproof enclosure.
- 15) Disconnect terminals shall only be operated when the circuit is electrically isolated. This restriction does not apply if the circuit is intrinsically safe.
- 16) Fuses shall be marked either as increased safety or intrinsically safe, but not both. Terminals that are marked as intrinsically safe shall be light blue.


# ATEX-IECE<sub>x</sub> APPROVED TERMINAL BLOCKS

## Marking :

### For increased safety 'e'

Sira 16ATEX3028U  
0518  II 2G Ex eb IIC Gb

### For intrinsic safety 'i'

Sira 16ATEX3028U  
0518  II 2G Ex ib IIC Gb

IECE<sub>x</sub> SIR 16.0016U  
Ex eb IIC Gb

IECE<sub>x</sub> SIR 16.0016U  
Ex ib IIC Gb

Ambient Temperature range : -40°C to +40°C  
Service Temperature range : -40° C to +85°C

Insulation Material: Polyamide 66, CTI 600 / Material Group I.

Terminal Block	Increased Safety 'e' Voltage ( V )	Current (A)	Wire Size (sq.mm)	Intrinsic Safety 'i' Voltage ( V )	Stripping Length (mm)	Torque (Nm)
CX2.5	630	21	0.2 - 2.5	60	10	N.A.
CX2.5/3	630	21	0.2 - 2.5	60	10	N.A.
CX2.5/4	630	21	0.2 - 2.5	60	10	N.A.
CX4	630	28	0.2 - 4	60	10	N.A.
CX4/3	630	28	0.2 - 4	60	10	N.A.
CX4/4	630	28	0.2 - 4	60	10	N.A.
CX6	630	36	0.2 - 6	60	14	N.A.
CX6/3	630	36	0.2 - 6	60	14	N.A.
CX10	630	51	0.2 - 10	60	18	N.A.
CX10/3	630	51	0.2 - 10	60	18	N.A.
CXDL2.5	630	21	0.2 - 2.5	60	10	N.A.
CXDL2.5(I.S.)	630	21	0.2 - 2.5	60	10	N.A.
CXS2.5	630	21	0.2 - 2.5	60	9	N.A.
CM1.5S	320	15	0.2 - 1.5	60	8	N.A.
CM1.5S2	320	15	0.2 - 1.5	60	8	N.A.
CM2.5S	320	21	0.2 - 2.5	60	9	N.A.
CM2.5S2	320	21	0.2 - 2.5	60	9	N.A.
CMS2.5	400	21	0.2 - 2.5	60	9	N.A.
CXG2.5	630	N.A.	0.2 - 2.5	60	10	N.A.
CXG2.5/3	630	N.A.	0.2 - 2.5	60	10	N.A.
CXG2.5/4	630	N.A.	0.2 - 2.5	60	10	N.A.
CXG4	630	N.A.	0.2 - 4	60	10	N.A.
CXG4/3	630	N.A.	0.2 - 4	60	10	N.A.
CXG4/4	630	N.A.	0.2 - 4	60	10	N.A.
CXG6	630	N.A.	0.2 - 6	60	14	N.A.
CXG6/3	630	N.A.	0.2 - 6	60	14	N.A.
CXG10	630	N.A.	0.2 - 10	60	18	N.A.
CXG10/3	630	N.A.	0.2 - 10	60	18	N.A.
CXDLG2.5	630	21 A TOP CB	0.2 - 2.5	60	10	N.A.
CXDLG2.5(I.S.)	630	N.A.	0.2 - 2.5	60	10	N.A.
CXSG2.5	630	N.A.	0.2 - 2.5	60	9	N.A.
CMCG4	630	N.A.	0.2 - 4	60	9	0.5
CDLG4	400	28 A TOP CB	0.2 - 4	60	8	0.5
CSB3/N3UL	500	36	0.5 - 6	60	9	0.5
CSB3/N3U	500	36	0.5 - 6	60	9	0.5
CBS3U	500	36	0.5 - 6	60	9	0.5
CSB4/N4U	500	51	1.5 - 10	60	9	1.2
CBS4U	500	51	1.5 - 10	60	9	1.2
CSB5/N5U	630	68	1.5 - 16	60	9	2
CBS5U	630	68	1.5 - 16	60	9	2
STH3	630	36	1.5 - 6	60	8	0.5
STH4	500	36	1.5 - 6	60	10	1.2
STH6	630	110	1.5 - 35	60	12	2.5

## ATEX-IECE<sub>x</sub> APPROVED TERMINAL BLOCKS

### Marking :

**For increased safety 'e'**

Sira 16ATEX3029U

Ⓔ II 3G Ex ec IIC Gc

**For intrinsic safety 'i'**

Sira 16ATEX3029U

Ⓔ II 3G Ex ic IIC Gc

Ambient Temperature range : -40°C to +40°C

Service Temperature range : -40°C to +85°C

IECE<sub>x</sub> SIR 16.0015U

Ex ec IIC Gc

IECE<sub>x</sub> SIR 16.0015U

Ex ic IIC Gc

Insulation Material: Polyamide 66, CTI 600 / Material Group I.

Terminal Block	Increased Safety 'e' Voltage ( V )	Current (A)	Wire Size (sq.mm)	Intrinsic Safety 'i' Voltage ( V )	Stripping Length (mm)	Torque (Nm)
CXF4	630	6.3	0.2 - 4	60	10	N.A.
CXF4L	630	6.3	0.2 - 4	60	10	N.A.
CXCC4-CPFL	630	6.3	0.2 - 4	60	10	N.A.
CXCC4-CPF	630	6.3	0.2 - 4	60	10	N.A.
CF4U	500	6.3	0.2 - 4	60	8	0.5
CF4UL	500	6.3	0.2 - 4	60	8	0.5
DDFL4U	500	6.3	0.2 - 4	60	8	0.5
DDFL4UE	500	6.3	0.2 - 4	60	8	0.5
CKT4U	630	24	0.2 - 4	60	8	0.5
CKT4U/4	630	24	0.2 - 4	60	8	0.5
CXK2.5	630	17	0.2 - 2.5	60	10	N.A.
CXK2.5/4	630	17	0.2 - 2.5	60	10	N.A.

### Marking :

**For increased safety 'e'**

Sira 16ATEX3170U

0518 Ⓔ II 2G Ex eb IIC Gb

**For intrinsic safety 'i'**

Sira 16ATEX3170U

0518 Ⓔ II 2G Ex ib IIC Gb

Ambient Temperature range : -40°C to +40°C

Service Temperature range : -40°C to +85°C

IECE<sub>x</sub> SIR 16.0056U

Ex eb IIC Gb

IECE<sub>x</sub> SIR 16.0056U

Ex ib IIC Gb

Insulation Material: Polyamide 66, CTI 600 / Material Group I.

Terminal Block	Increased Safety	Current	Wire Size	Intrinsic Safety	Stripping Length	Torque
CTS2.5UN	690	21	0.5-2.5	60	9	0.4
CTS2.5UE	690	28	0.5-4	60	9	0.5
CTS4UN	690	28	0.5-4	60	9	0.5
CTS6U	690	36	1.5-6	60	12	0.8
CTS10U	690	50	1.5-10	60	12	1.2
CTS16U	690	66	2.5-16	60	12	2
CTS25U	690	88	6 - 25	60	14	2
CTS25UN	690	88	6 - 25	60	14	2
CTS35UN	800	109	10 - 35	60	16	2.5
CMT4	350	28	0.5-4	60	8	0.5
CMB4	250	28	0.5-4	60	8	0.5
CMC1-2	690	28	0.5-4	60	9	0.5
CMC2-2	690	28	0.5-4	60	9	0.5
CDL4UN	440	28	0.5-4	60	8	0.5
CDL4U	350	28	0.5-4	60	8	0.5
ODL4U	550	28	0.5-4	60	9	0.5
CTL2.5U	440	21	0.5-2.5	60	8	0.4
CTL2.5UH	440	21	0.5-2.5	60	8	0.4
CSCP2.5T	440	21	0.5-2.5	60	11	NA
CSCP2.5T2	440	21	0.5-2.5	60	11	NA
CGMT4	350	NA	0.5-4	60	9	0.5
CGT4U	500	NA	0.5-4	60	9	0.5
CGT10U	630	NA	1.5-10	60	12	1.2
CGT35U	630	NA	10 - 35	60	18	2.5
CGT4N	440	NA	0.5-4	60	9	0.5
CGT6N	630	NA	0.5-6	60	12	0.8

## ATEX-IECE<sub>x</sub> APPROVED TERMINAL BLOCKS

Terminal Block	Increased Safety 'e' Voltage ( V )	Current (A)	Wire Size (sq.mm)	Intrinsic Safety 'i' Voltage ( V )	Stripping Length (mm)	Torque (Nm)
CGT10N	630	NA	1.5-10	60	12	1.2
CGT16N	630	NA	2.5-16	60	14	2
PTB35/50SH / PTB35/50	1100	126	16 - 50	60	18	3
AS2.5	630	21	0.34-2.5	60	11	NA
AS2.5/3	630	21	0.34-2.5	60	11	NA
AS2.5/4	630	21	0.34-2.5	60	11	NA
AS4	630	28	0.34-4	60	12	NA
AS4/3	630	28	0.34-4	60	12	NA
AS4/4	630	28	0.34-4	60	12	NA
AS6	630	36	0.34-6	60	13	NA
AS6/3	630	36	0.34-6	60	13	NA
AGT2.5	630	NA	0.34-2.5	60	11	NA
AGT2.5/3	630	NA	0.34-2.5	60	11	NA
AGT2.5/4	630	NA	0.34-2.5	60	11	NA
AGT4	630	NA	0.34-4	60	12	NA
AGT4/3	630	NA	0.34-4	60	12	NA
AGT4/4	630	NA	0.34-4	60	12	NA
AGT6	630	NA	0.34-6	60	13	NA
AGT6/3	630	NA	0.34-6	60	13	NA

# WIRE TERMINATION

---

Systematic wiring in a panel board requires a layout of properly selected Terminal Blocks. In the normal course, it would be appropriate to assign one wire per clamping unit of a Terminal Block thus, simplifying the task of identification of the circuit.

The Screw Clamp Terminal Blocks can accommodate wires one size higher than the rated cross section. It must be noted that they can also take two wires one size smaller than the rated cross section.

If, however, two wires are connected to one clamping unit of a screw clamp Terminal Block, care must be taken to ensure that the total current assigned to the two wires does not exceed the continuous rating of the Terminal Block.


For 'Screwless' Spring Clamp Terminal Blocks, special care must be taken that only one wire must be connected per clamping unit.

The relevant standard, IEC 60947-7-1, section 4.3.5 states that for Terminal Blocks with a rated cross section from 0.2 sq. mm to 35 sq. mm. (both inclusive), the manufacturer shall specify the range and number of the rated cross section. The conductor can be rigid (solid or multi strands) or flexible (fine strands), these values can be found in product related technical data.

Connectwell feed through Terminal Blocks are designed to allow copper wires to be connected without any special preparations such as soldering the individual strands of wire or using cable lugs / ferrules. However, wires requiring special preparation can also be used in Connectwell Terminal Blocks, as per IEC 60947-7-1.

For connecting aluminium wires, special care must be taken while stripping the insulation from the wires. It is strictly recommended to use ferrules and lugs while connecting flexible aluminium wires. Once the wire has been stripped of its insulation to the recommended length, it should be coated with acid and alkaline free Vaseline and screwed into the terminal immediately. This procedure must be followed each time that an aluminium wire is to be disconnected and reconnected.

In applications where connections have to be changed frequently, it is recommended to use lugs/ferrules/cable sockets to avoid fracturing of individual wires.

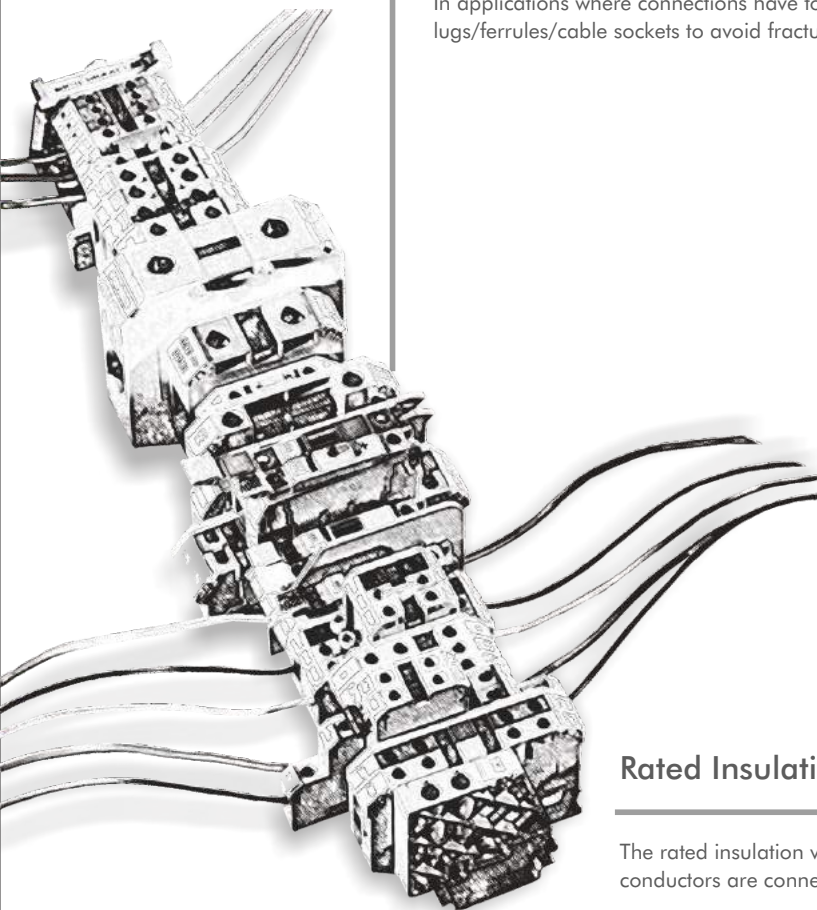


---


## Rated Insulation Voltage with two wires/conductors

The rated insulation voltage of the Terminal Blocks does not change if the wires / conductors are connected correctly.


# WIRE CONNECTION METHOD

## Screw Clamp Connection

'The Screw Clamp Connection' is the most popular method of wire termination. It offers distinct advantages over the other wire termination methods:



- Suitable for all cross-sections and types of wires
- Wires can be connected without any special preparation
- Provides vibration resistant connection
- Simple connection and disconnection of wires with the aid of an ordinary screw driver (Fig.1)
- The cold forged rolled threaded screws provide high tightening torque.



**Fig. 1**  
**Screw Clamp Operation**

The steel clamping screw produces high contact force while the steel clamping yoke transmits this force by pressing the conductor against the current bar. The conducting medium within a Terminal Block is its current bar, which is made from electrolytic copper or 63 / 37 brass and tin plated. The tin plating on the current bar ensures excellent continuous contact and provides good protection against corrosion. Even the best electrical conductor materials are worthless without the required contact force to press the connected wire to the contact surface on the current bar. It is because of this that the clamping yokes and screws are made of steel. The steel parts are zinc plated and additionally chromate passivated in order to achieve the highest degree of corrosion resistance.

When the clamping screw is tightened, the clamping yoke gets pulled upwards, pressing the wire against the current bar. The clamping yoke and current bar are serrated. The serrations of the current bar cut through the oxide skin of the wire on tightening, thereby providing many contact lines. The serrations of the clamping yoke improve the gripping of the wire. When the wire is tightened, the clamping pressure pulls the top threaded surfaces of the yoke exerting extra high locking action on the clamping screw. (Fig. 2)

Changes caused by temperature variations, if any, are effectively equalised by the elasticity of steel, providing excellent vibration resistance.



Large pressure areas on the current bar and the clamping yoke prevent notching, which otherwise could lead to possible wire fracture. The clamping yokes come in different sizes and shapes to accommodate wires of different cross sections. A flat clamping area ensures safe gripping of wires of smaller cross sections. The flange / tail of the clamping yokes prevents false entry of the wires underneath the yokes.

The following characteristics make the Screw Clamp Connection user friendly, versatile and sturdy:

- Strong contact force which makes it absolutely gas tight
- Very low contact resistance
- Excellent vibration proof protection preventing loosening of screws
- Reliable electrical and mechanical connection
- Ease of handling

## Cable Lug Connection



This method of wire termination is preferred for connections that are subject to very severe vibrations. The wire is crimped to a ring/fork type and is screwed on to the flat current bar in the Terminal Block.



**Fig. 2**  
**Wire / Conductor Retention**

## Spring Clamp Technology

The more recently introduced Screwless Spring Clamp connection is as versatile as the screw clamp connection. In this type of a connection, the wire is held against the electrolytic copper current bar directly by a pre stressed spring clamp. The spring is operated by using a screw driver to provide an access to the wire through the opening in the spring clamp. The inserted wire gets clamped on to the current bar on the removal of the screw driver. The high quality stainless steel spring clamp ensures a good connection of the wire with minimal contact resistance. The electrical and mechanical quality of the wire connection is maintained by the high quality rust proof spring clamp. Only one wire per clamp must be terminated.

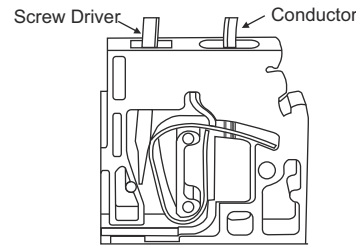


**Screwless Spring Clamp Actuation**

The following are the characteristics of Spring Clamp Connection:

- Easy to operate, versatile and vibration proof
- Minimal contact resistance because of a gas tight connection is made possible by the high quality stainless steel spring clamp
- Fail proof / safe, maintenance free connection
- The surface treated (tin plated) electrolytic copper current bar ensures oxidation free contact


## Cable Lug / Bus Bar Connection

This type of connection is preferred for wires of larger cross sections. The conductor is fit with a lug and bolted on to the flat current bar. This method is also ideal for connections subject to very severe vibrations.




## Solder Connection

Solder connections are suitable for wires having a cross section up to 2.5 sq. mm. In this type of connection, the wire is soldered to a solder lug. If done professionally, soldering can provide a good electrical connection.




## Tab Connection

Tab connections are preferred in applications where the connected wire needs to be frequently connected and disconnected. A tab sleeve with a crimped wire is pushed on to the Terminal Block.



## Wire Wrap Connection

This type of connection is suitable for connecting a thin solid wire. The wire is wrapped to a square pin provided in the Terminal Block. A special tool is required for wrapping the wire to the square pin.





# WIRE TIGHTENING

The design of the Connectwell Screw Clamps / Cable Lug system ensures vibration proof positive connection wires at the recommended torque values. However, Connectwell Terminal Blocks can withstand torque levels in excess of the recommended torque values. The Terminal Block clamping parts when tightened within the torque range ensure optimum performance as given below:

- The voltage drop (contact resistance) is well below the specified limits
- The wire gets clamped perfectly to form a gas tight connection
- The clamping yoke does not get damaged mechanically. The tightening torque according to IEC 60947-7-1 table 4, is the safe limit of the torque which guarantees the successful clamping of the connected wire.


Connectwell Terminal Blocks tightening torque data is given in the respective product pages.

All Connectwell Terminal Blocks are designed to function with rated wire sizes as per their respective AWG (American Wire Gauge) or Metric size/system. The Terminal Blocks are tested for Gauge Insertion as per VDE 0660.

## Tightening Torque for Screw Clamp Terminal Blocks

Terminal Blocks	Thread Size of Fastener	Recommended Torque Value
CTS2.5UN/CPT(M)/CPT5	M 2.5	0.4 Nm
CTS2.5(M)/CMST1/CMST2	M 2.6	0.4 Nm
CTS2.5/CMT4/CMB4/CDL4U/ODL4U/ CGT4U/CTS4UN/CTS4SC/CSTSB3/CSFL4U/ CSDL4U/CKT4U/CPT7.5/DDFL4U/ DDFL4U(E)/DDFL4U(E)LR/CMC1-2/CMC2-2	M 3	0.5 Nm
CTS6/CTS6SC/CTS6U/CSFL6U/CENC4	M 3.5	0.8 Nm
CTS10/10U/CTS16/16U/CSTSN4/B4/CDTTS/ CTS10SC/CGT10U/DDPT/CDTTU/CSTSN4U/STH4	M 4	1.2 Nm
CTS25U/CSTSB5/N5/N5(15)/RN5/N5U/CENC16	M 5	2.0 Nm
CTS35/CTS35U/CENC35/CGT35U/CSTSN6U	M 6.0	2.0 Nm
CTS35L/35LS/CSTSRN6/CSTSN6	M 6.0	2.8 Nm
CTS70L/70LS	M8.0	6.0 Nm
CTS95L/95LS	M10.0	10.0 Nm

## Conductor cross-sections and Gauges

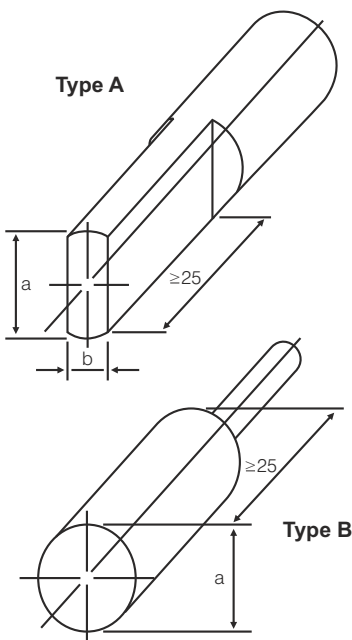

Representative Picture of Gauge Type A and Type B

Conductor Cross-section							
Flexible (sq.mm)	Rigid (solid or stranded) (sq.mm)	Gauge Type A			Gauge Type B		Permissible deviation for a and b
		Marking	Diameter a (mm)	Width b (mm)	Marking	Diameter a (mm)	
1.5	1.5	A1	2.4	1.5	B1	1.9	0 / -0.05
2.5	2.5	A2	2.8	2.0	B2	2.4	0 / -0.05
2.5	4	A3	2.8	2.4	B3	2.7	0 / -0.05
4	6	A4	3.6	3.1	B4	3.5	0 / -0.06
6	10	A5	4.3	4.0	B5	4.4	0 / -0.06
10	16	A6	5.4	5.1	B6	5.3	0 / -0.06
16	25	A7	7.1	6.3	B7	6.9	0 / -0.07
25	35	A8	8.3	7.8	B8	8.2	0 / -0.07
35	50	A9	10.2	9.2	B9	10.0	0 / -0.07
50	70	A10	12.3	11.0	B10	12.0	0 / -0.08
70	95	A11	14.2	13.1	B11	14.0	0 / -0.08
95	120	A12	16.2	15.1	B12	16.0	0 / -0.08
120	150	A13	18.2	17.0	B13	18.0	0 / -0.08
150	185	A14	20.2	19.0	B14	20.0	0 / -0.08
185	240	A15	22.2	21.0	B15	22.0	0 / -0.09
240	300	A16	26.5	24.0	B16	26.0	0 / -0.09

# ELECTRICAL DATA

Connectwell Terminal Blocks are standard blocks for industries such as Switchgear, Distribution, Machine Tools Control, Instrumentation Installations, Material Handling Equipments, Process Plants On and Offshore Installations and Panel Board Construction.

## Rated Voltage

The voltage rating of the product is assigned in accordance with specifications related to Creepage & Clearance distance defined in respective EN, VDE, UL and CSA standards, for the environmental conditions and pollution degrees as given below.

### Degree of Pollution

Pollution degree 1

Creepage and clearance distances are evaluated for the following pollution degree :

Pollution degree 2

No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.

Pollution degree 3

Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.

Pollution degree 4

Conductive pollution occurs or dry, non conductive pollution occurs which becomes conductive due to condensation is to be expected.

The pollution generates persistent conductivity caused by conductive dust or by rain or snow.

### Rated Impulse Voltage

The rated impulse voltage of the product is the peak value of an impulse voltage with which the terminal block can be loaded and on which the creepage and clearances according to relevant standard are based.

## CTI - Comparative Tracking Index of Insulation material

The insulation material is divided into four groups according to their CTI (Comparative Tracking Index)

<b>Material Group I</b>	<b>600 ≤ CTI</b>
<b>Material Group II</b>	<b>400 ≤ CTI &lt; 600</b>
<b>Material Group III a</b>	<b>175 ≤ CTI &lt; 400</b>
<b>Material Group III b</b>	<b>100 ≤ CTI &lt; 175</b>

The Comparative Tracking Index must be defined according to DIN IEC 112/ VDE 0303 part 1 on specimens made specifically for this purpose with test solution A. The proof-tracking index (PTI) is also used to identify the tracking characteristics of materials. A material may be included in one of the four groups given above on the basis that its PTI, established by the method of IEC 112 using solution A, is equal to or greater than the lower value specified for the Insulation group.

## Current carrying capacity of terminal block

(DIN EN 60947-7-1/VDE 0611 part1: 2000-05)

The data given below is for unprepared conductor ends without ferrules. The rated current for Terminal Blocks with specific functions such as Fuse type, Relays, Terminal Blocks incorporating electronic components is to be specified by manufacturer.

Rated Cross Section (sq.mm)	0.2	0.5	0.75	1	1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300
Test current (A)	4	6	9	13.5	17.5	24	32	41	57	76	101	125	150	192	232	269	309	353	415	520

## Current Rating with two wire/conductors

The total current of the two wires / conductors should not exceed the continuous current rating of the Terminal Block. The continuous current rating is the maximum current the terminal block can conduct without a temperature rise of 45 K (as per EN standard) and 30°C (as per UL / CSA standard).


### Note

For PE-Terminals only one conductor should be connected per clamping part, in accordance with installation requirement.

# TERMINAL BLOCK MATERIAL

Connectwell Terminal Blocks are made of carefully selected materials, insulating materials, clamping and conducting metals which are subject to strict quality control as demanded by the most stringent international standards.

## Clamping Screws




Structure of a turned Screw

One of the most important parts of the terminal block is its screw. The quality of the connection depends mainly on the quality of the screw. The screw must not get damaged, should withstand a higher torque than what is stipulated in its specification. The screw should not, even at the highest stress weld with the metal of the main thread.

Connectwell Terminal Blocks employ cold forged rolled threaded steel screws. In such screws the material is compressed and therefore strengthened. Whereas, when turned screws are cut, the material from between the threads is removed. Because of this and the stress concentration on the neck of the screw, the turned screw is considerably weaker on strength.

The screws are zinc plated and chromate passivated for a good galvanic surface.



Structure of a rolled Screw

## Clamping yoke

Clamping yokes in carefully selected grades of steel ensure high torque performance necessary for gas tight connections. The clamping components (both screws and clamping yokes) are electroplated with zinc and passivated by an additional coat of chromate. The Zinc provides a cathodic protection to the steel. Therefore the effect of protection against corrosion is still retained even when the plating is partially damaged by scratches or pores.

The clamping components of some of Connectwells Terminal Blocks are made of copper alloys. Such components are electroplated with either nickel or tin to ensure oxidation free performance.

## Current carrying / Conducting components

The current carrying/conducting components / current bars are made of electrolytic grade copper or copper alloy to ensure very low contact resistance. The components are electroplated with tin / nickel to provide an oxidation free contact.

## Insulating Material

All the live parts in Terminal Blocks are totally shrouded to minimize the risk of accidental contact in High Grade Melamine or in Engineering Thermoplastic Polyamide 6.6 Housing.

## High Grade Melamine

Melamine is a thermosetting material of the amino group pf plastics. Apart from its inherent dielectric properties, it retains its mechanical, electrical and dimensional stability under conditions of heat, cold, damp and dryness to a degree in excess of commercial thermoplastic and phenolic material. It has very good insulation properties and a high resistance to flash over. Since its material is of eroding type rather than carbonising type, its resistance to tracking is also high. The moulded housing is non-hygroscopic, not subject to mould growth, is completely reliable in tropical conditions and can be used in a temperature range of - 55°C to + 130°C.

# TERMINAL BLOCK MATERIAL

## Polyamide 6.6

Engineering Thermoplastic Polyamide 6.6 has excellent electrical, mechanical and chemical characteristics, even at temperature as high as 105°C. This insulating material has high mechanical strength - it is unbreakable. Its resistance to tracking is similar to Melamine. The Polyamide 6.6 moulded housing absorbs humidity from its surroundings. However, it does not crystallise water in the plastic itself as is the case in thermosetting plastic. The H<sub>2</sub>O groups combine within the molecular structure.

Thus moulded plastic housing becomes fracture proof and unbreakable even in sub zero temperature conditions.

Polyamide 6.6 is difficult to ignite, self-extinguishing, burns only as long as there is a supporting flame and is rated V2 according to UL 94. It has excellent resistance to micro organisms, bacteria, enzymes and termites. Good ageing resistance and insensitivity to ultra violet light makes it suitable for tropical and open air applications. Polyamide 6.6 has excellent resistance to fuels, oils, fats and most common solvents like aliphatic and aromatic carbohydrates, ketons and alcohols.

## Typical properties of insulation material

Property	Unit	Thermoset High Grade Melamine	Engineering Thermoplastic Polyamide 6.6
Specific Gravity	-	1.5	1.2 - 1.15
Upper Temperature Limit	°C	130	105
Lower Temperature Limit	°C	- 55	- 50
Volume Resistivity	Ohm cm	10 <sup>11</sup>	10 <sup>12</sup>
Surface Resistivity	Ohm	10 <sup>10</sup>	10 <sup>10</sup>
Dielectric Strength	KV/cm	100	400
Tropical Resistance	-	Good	Good
Flammability	Grade	V0	V2 / V0 #
Flexibility	-	-	Excellent

# V0 available on request

## CE Marking

The CE marking is, in particular, an indication that the products comply with the essential requirements of applicable directives and that the products have been subject to a conformity assessment procedure provided for in the directives. CE marking ensures free trading within Europe. Connectwell terminal blocks are CE marked and the products comply to Low Voltage Directive, 73/23/EEC, Including amendments by the CE marking directive, 93/68/EEC

At Connectwell the Product Development cycle, production & assembly of components and supply are all controlled by an ISO 9001:2008 Quality Management System.

Connectwell Products not only fulfill Customers needs and requirements of standards and specifications but also surpass the same.

# TECHNICAL INFORMATION









## FUSE TERMINAL BLOCKS

Max. power dissipation with Reference IEC 60947-7-3

When selecting Cartridge fuse inserts, please ensure that the maximum power dissipation specified below is not exceeded. Details can be obtained from the fuse manufacturers.

Cartridge fuse inserts 5 X 20 mm

Terminal Block	Rated Voltage (V)	Rated Current (I <sub>max</sub> )	Exclusive short circuit protection	
			Separate Arrangement	Compound Arrangement
CXF4	1000	10	2W	2W
CXF4L	1000	10	2W	2W
CXCC4-CPF	1000	10	2W	2W
CXCC4-CPFL	1000	10	2W	2W
CYDLGF4LRL	500	10	2W	2W
CYDLGF4LRL	500	10	2W	2W
CYDLGF4LRL	500	10	2W	2W
CYDLF4LR	500	10	2W	2W
CYDLGF4L	500	10	2W	2W
CYDLF4L	500	10	2W	2W
CYDLGF4	500	10	2W	2W
CYDLF4	500	10	2W	2W
CXF4/3	1000	10	2W	2W
CXF4/3L	1000	10	2W	2W
CXAF4/3	1000	10	2W	2W
CXCC4/3-CPF	1000	10	2W	2W
CXCC4/3-CPFL	1000	10	2W	2W
CXVFA	800	10	2W	2W
CXVF2.5A	800	10	2W	2W

Index	Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.
The Index gives ready reference of Cat. No. / Type and cross reference of page number.	ADLG2.5	111	CA402	220	CA509/K9/H	224
Abbreviation used:	AGT2.5	135	CA501-1M	219	CA509/K9/V	224
<b>Colour</b>	AGT2.5/3	136	CA501-1M-S	219	CA509/K9F/H	224
<b>Ordering Suffix</b>	AGT2.5/4	137	CA501-2M	219	CA509/K9F/V	224
Blue 	AGT4	136	CA501-2M-S	219	CA509/K9FWHT	224
Black 	AGT4/3	137	CA502	220	CA509/K9WHT	224
Orange 	AGT4/4	138	CA502/F	213	CA510/01	234
Red 	AGT6	136	CA503/01	234	CA510/1	234
Green 	AGT6/3	138	CA503/1	234	CA510/5	234
Yellow 	AS2.5	131	CA503/5	234	CA512/10-2	234
White 	AS2.5/3	132	CA504/01	234	CA512/10-3	234
Beige 	AS2.5/3BK	132	CA504/1	234	CA512/10-4	234
	AS2.5/3BU	132	CA504/5	234	CA512/11-2	233
	AS2.5/3GN	132	CA505/01	234	CA512/1-2	233
	AS2.5/3R	132	CA505/1	234	CA512/12-2	234
	AS2.5/3Y	132	CA505/5	234	CA512/1-3	233
	AS2.5/4	133	CA506/01	234	CA512/13-2	233
	AS2.5/4BK	133	CA506/1	234	CA512/13-3	233
	AS2.5/4BU	133	CA506/5	234	CA512/13-4	233
	AS2.5/4GN	133	CA507/L/Q/01	234	CA512/1-4	233
	AS2.5/4R	133	CA507/S/Q/01	234	CA512/14-2	234
	AS2.5/4Y	133	CA508/L/Q	234	CA512/14-3	234
	AS2.5BK	131	CA508/S/Q	234	CA512/14-4	234
	AS2.5BU	131	CA509/7	213	CA512/15-2	233
	AS2.5GN	131	CA509/G1	221	CA512/15-3	233
	AS2.5R	131	CA509/G2	221	CA512/15-4	233
	AS2.5Y	131	CA509/K10/H	224	CA512/17-2	234
	AS4	132	CA509/K10/V	224	CA512/17-3	234
	AS4/3	133	CA509/K10WHT	224	CA512/17-4	234
	AS4/3BK	133	CA509/K12/H	224	CA512/2-2	233
	AS4/3BU	133	CA509/K12/V	224	CA512/2-3	233
	AS4/3GN	133	CA509/K12WHT	224	CA512/2-4	233
	AS4/3R	133	CA509/K16/H	224	CA512/3-2	234
	AS4/3Y	133	CA509/K16/V	224	CA512/3-3	234
	AS4/4	134	CA509/K16WHT	224	CA512/3-4	234
	AS4/4BK	134	CA509/K2/H	224	CA512/4-2	234
	AS4/4BU	134	CA509/K2/V	224	CA512/4-3	234
	AS4/4GN	134	CA509/K2B4/H	224	CA512/4-4	234
	AS4/4R	134	CA509/K2B4/V	224	CA512/5-2	233
	AS4/4Y	134	CA509/K2B4WHT	224	CA512/5-3	233
	AS4BK	132	CA509/K2G/H	224	CA512/5-4	233
	AS4BU	132	CA509/K2G/V	224	CA512/6-2	234
	AS4GN	132	CA509/K2GWHT	224	CA512/6-3	234
	AS4R	132	CA509/K2WHT	224	CA512/6-4	234
	AS4Y	132	CA509/K3.5WHT	224	CA512/7-2	233
	AS6	132	CA509/K3/H	224	CA512/7-3	233
	AS6/3	134	CA509/K3/V	224	CA512/7-4	233
	AS6/3BK	134	CA509/K3WHT	224	CA512/8-2	234
	AS6/3BU	134	CA509/K4/H	224	CA512/8-3	234
	AS6/3GN	134	CA509/K4/V	224	CA512/8-4	234
	AS6/3R	134	CA509/K4WHT	224	CA512/9-2	233
	AS6/3Y	134	CA509/K5/H	224	CA512/9-3	233
	AS6BK	132	CA509/K5/V	224	CA512/9-4	233
	AS6BU	132	CA509/K5WHT	224	CA513	213
	AS6GN	132	CA509/K6/H	224	CA514/10-2	234
	AS6R	132	CA509/K6/V	224	CA514/10-3	234
	AS6Y	132	CA509/K6F/H	224	CA514/10-4	234
	ATL2.5	112	CA509/K6F/V	224	CA514/11-2	233
	ATL2.5H	112	CA509/K6FWHT	224	CA514/1-2	233
	ATLG2.5	112	CA509/K6WHT	224	CA514/12-2	234
	AUX6	14	CA509/K7.5/H	224	CA514/1-3	233
	CA102	220	CA509/K7.5/V	224	CA514/13-2	233
	CA103	220	CA509/K7.5WHT	224	CA514/13-3	233
	CA104	220	CA509/K8/H	224	CA514/13-4	233
	CA202	220	CA509/K8/V	224	CA514/1-4	233
	CA302	220	CA509/K8WHT	224	CA514/14-2	234

When ordering please add colour suffix to Cat. No.

**Example: CTS2.5UNR**

**Note:**

Colours given above are indicative purpose only.

Contact us for colour products that are not listed in Alphabetical index.

Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.
CA514/14-3	234	CA625/4	231	CA707/S/Q/1	230	CA729/2	229
CA514/14-3A	234	CA627/10	231	CA707/S/Q/2	230	CA729/3	229
CA514/14-4	234	CA627/2	231	CA707/S/Q/3	230	CA729/4	229
CA514/14-4A	234	CA627/3	231	CA710/10	230	CA731/10	230
CA514/15-2	233	CA627/4	231	CA710/2	230	CA731/100	230
CA514/15-3	233	CA628/2	231	CA710/3	230	CA731/10-A	230
CA514/15-4	233	CA628/3	231	CA710/4	230	CA732/10	230
CA514/17-2	234	CA629/2	231	CA711/10	230	CA732/100	230
CA514/17-3	234	CA629/3	231	CA711/2	230	CA732/10-A	230
CA514/17-4	234	CA643/10	231	CA711/3	230	CA733/10	230
CA514/2-2	233	CA643/2	231	CA711/4	230	CA734/10	230
CA514/2-3	233	CA643/3	231	CA713/10	230	CA735/10	230
CA514/2-4	233	CA643/4	231	CA713/2	230	CA737/10	230
CA514/3-2	234	CA644/10	231	CA713/3	230	CA739/10	230
CA514/3-3	234	CA644/2	231	CA713/4	230	CA741/10	229
CA514/3-4	234	CA644/3	231	CA714/10	230	CA741/100	229
CA514/4-2	234	CA644/4	231	CA714/2	230	CA741/2	229
CA514/4-3	234	CA645/10	231	CA714/3	230	CA741/3	229
CA514/4-4	234	CA645/2	231	CA714/4	230	CA741/4	229
CA514/5-2	233	CA645/3	231	CA715/10	230	CA742/10	229
CA514/5-3	233	CA645/4	231	CA715/2	230	CA742/100	229
CA514/5-4	233	CA701-15-1M	219	CA715/3	230	CA742/2	229
CA514/6-2	234	CA701-15-1M-S	219	CA715/4	230	CA742/3	229
CA514/6-3	234	CA701-15-2M	219	CA716/10	230	CA742/4	229
CA514/6-4	234	CA701-15-2M-S	219	CA716/2	230	CA743/10	229
CA514/7-2	233	CA701-1M	219	CA716/3	230	CA743/2	229
CA514/7-3	233	CA701-1M-S	219	CA716/4	230	CA743/3	229
CA514/7-4	233	CA701-2M	219	CA717/10	230	CA743/4	229
CA514/8-2	234	CA701-2M-S	219	CA717/2	230	CA744/10	229
CA514/8-3	234	CA702	220	CA717/3	230	CA744/2	229
CA514/8-4	234	CA703	222	CA717/4	230	CA744/3	229
CA514/9-2	233	CA703/01	230	CA718/10	230	CA744/4	229
CA514/9-3	233	CA703/1	230	CA718/2	230	CA745/10	229
CA514/9-4	233	CA703/10	230	CA718/3	230	CA745/2	229
CA521/10	233	CA703/11	231	CA718/4	230	CA745/3	229
CA521/2	233	CA703/2	230	CA721/10	229	CA745/4	229
CA521/3	233	CA703/3	230	CA721/100	229	CA747/10	229
CA521/4	233	CA703/4	230	CA721/2	229	CA747/2	229
CA522/10	233	CA703/6	230	CA721/3	229	CA747/3	229
CA522/2	233	CA703/8	230	CA721/4	229	CA747/4	229
CA522/3	233	CA703/9	231	CA722/10	229	CA749/10	229
CA522/4	233	CA704/01	230	CA722/100	229	CA749/2	229
CA601-1M	219	CA704/1	230	CA722/2	229	CA749/3	229
CA602	220	CA704/10	230	CA722/3	229	CA749/4	229
CA603	222	CA704/11	231	CA722/4	229	CA751/10	229
CA607/S/Q	230	CA704/2	230	CA723/10	229	CA751/2	229
CA611/S/Q	232	CA704/3	230	CA723/2	229	CA751/3	229
CA621/10	233	CA704/4	230	CA723/3	229	CA751/4	229
CA621/2	233	CA704/6	230	CA723/4	229	CA761/10	229
CA621/3	233	CA704/8	230	CA724/10	229	CA761/2	229
CA621/4	233	CA704/9	231	CA724/2	229	CA761/3	229
CA622/10	233	CA705/01	230	CA724/3	229	CA761/4	229
CA622/2	233	CA705/1	230	CA724/4	229	CA770/10	230
CA622/3	233	CA705/10	230	CA725/10	229	CA771/10	229
CA622/4	233	CA705/11	231	CA725/2	229	CA771/2	229
CA623/10	231	CA705/2	230	CA725/3	229	CA771/3	229
CA623/2	231	CA705/3	230	CA725/4	229	CA771/4	229
CA623/3	231	CA705/4	230	CA727/10	229	CA772/10	231
CA623/4	231	CA705/6	230	CA727/2	229	CA772/2	231
CA624/10	231	CA705/8	230	CA727/3	229	CA772/3	231
CA624/2	231	CA705/9	231	CA727/4	229	CA772/4	231
CA624/3	231	CA706/2	234	CA728/10	231	CA773/10	231
CA624/4	231	CA706/3	234	CA728/2	231	CA773/2	231
CA625/10	231	CA706/8	234	CA728/3	231	CA773/3	231
CA625/2	231	CA707/L/Q/1	234	CA728/4	231	CA773/4	231
CA625/3	231	CA707/S/Q/01	230	CA729/10	229	CA774/2	231

Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.
CA774/3	231	CBBPC1/70	191	CDL4UELD3	69	CF4UBK	33
CA774/4	231	CBBPC1/80	191	CDL4UELD4	69	CF4UBU	33
CA781/10	229	CBBPC2/100	193	CDL4UELD5	69	CF4UL110-240V	33
CA781/2	229	CBBPC2/160	193	CDL4UEMOV-30V	71	CF4UL6-60V	33
CA781/3	229	CBBPC2/200	193	CDL4UEMOV-60V	71	CGMT4	28
CA781/4	229	CBBPC2/250	193	CDL4UEN1	69	CGT10N	26
CA801/1	235	CBDT4U	184	CDL4UERC0.22MF	72	CGT10U	27
CA801/1-3	235	CBS3U	177	CDL4UERCO-0.1MF	72	CGT16N	27
CA801/2	235	CBS4U	178	CDL4UESDB-160V	72	CGT35U	28
CA801/2-3	235	CBS5U	178	CDL4UESDUA24V	72	CGT4N	25
CA801/3	235	CC14	31	CDL4UN	19	CGT4U	26
CA801/3-3	235	CC20	31	CDL4UN(I.S)	19	CGT50/70N	28
CA801/5	235	CC35	31	CDL4UN(I.S)BK	19	CGT6N	26
CA801/8	235	CC8	31	CDL4UN(I.S)BU	19	CHV10U	58
CA801/A10	235	CCC4U	56	CDL4UN(I.S)GN	19	CHV10UBU	58
CA801/A2	235	CCS10-20	32	CDL4UN(I.S)O	19	CHV4U	57
CA801/A3	235	CCS15-32	32	CDL4UN(I.S)R	19	CHV4UBU	57
CA801/A4	235	CCS2X2-6	32	CDL4UN(I.S)W	19	CHV6U	58
CA802	220	CCS3-8	32	CDL4UN(I.S)Y	19	CHV6UBU	58
CA803	222	CCS4 -13.5	32	CDL4UNBK	19	CIP	56
CA803/1	235	CDB10/2	50	CDL4UNBU	19	CKT4SP	38
CA901/1	235	CDB10/3	50	CDL4UNGN	19	CKT4SPBU	38
CA901/2	235	CDB10/4	50	CDL4UNO	19	CKT4SPSC	61
CA901/3	235	CDB25/1	51	CDL4UNR	19	CKT4U	37
CA901/4	235	CDB25/2	51	CDL4UNSP	222	CKT4U/4	38
CA901/5	235	CDB25/3	51	CDL4UNW	19	CKT4U/4BU	38
CA901/6	235	CDB25/4	51	CDL4UNY	19	CKT4U/S	37
CA902	223	CDB4/1	49	CDL4USP	222	CKT4UBU	37
CA903	222	CDB4/10(1)	50	CDLG2.5	21	CKT4UD1	68
CAFL4UBK	34	CDB4/11(1)	50	CDLG4	20	CKT4UD2	68
CAFL4UBU	34	CDB4/2	49	CDLG4(I.S)	20	CKT4UH	37
CAFL4UL110V	34	CDB4/2(1)	50	CDS6U	43	CKT6U	39
CAFL4UL220V	34	CDB4/3	49	CDS6U/FT	44	CKT6UBU	39
CAFL4UL24V	34	CDB4/3(1)	50	CDS6U/SC	44	CM1.5S	139
CAFL4UL48V	34	CDB4/4	49	CDS6U/TS	44	CM1.5S2	140
CAFL4UN110V	34	CDB4/4(1)	50	CDS6UBU	43	CM1.5S2BK	140
CAFL4UN220V	34	CDB4/5	49	CDTTU	41	CM1.5S2BU	140
CAFL4UW/F	34	CDB4/5(1)	50	CDTTUBU	41	CM1.5S2GN	140
CASP	222	CDB4/6	49	CDTTUFT	42	CM1.5S2O	140
CB16/2H	216	CDB4/6(1)	50	CDTTUFTBU	42	CM1.5S2R	140
CB16/3H	216	CDB6/1	50	CDTTUFTSC	62	CM1.5S2Y	140
CB4/1	215	CDB6/2	50	CDTTUSC	62	CM1.5S2YG	140
CB4/2	215	CDB6/3	50	CDTTUSH	42	CM1.5SBK	139
CB4/2H	215	CDB6/4	50	CENC16	30	CM1.5SBU	139
CB4/3	215	CDINS16	242	CENC16BK	30	CM1.5SGN	139
CB4/3H	215	CDINS6	241	CENC16BU	30	CM1.5SO	139
CB6/1	216	CDINSD	242	CENC16G	30	CM1.5SR	139
CB6/2H	216	CDINSUK	242	CENC35	30	CM1.5SY	139
CB6/3H	216	CDINSW1	242	CENC35BK	30	CM1.5SYG	139
CB6/4H	216	CDINSW2	242	CENC35BU?	30	CM2.5S	140
CBB120	192	CDL4U(O)	69	CENC35G	30	CM2.5S2	140
CBB120LS	192	CDL4UE3LA(90V)	71	CENC4	29	CM2.5S2BK	140
CBB150	193	CDL4UED1	67	CENC4BK	29	CM2.5S2BU	140
CBB150LS	193	CDL4UED2	67	CENC4BU	29	CM2.5S2GN	140
CBB185	194	CDL4UED3	67	CENC4G	29	CM2.5S2O	140
CBB185LS	194	CDL4UED4	68	CF4SP	34	CM2.5S2R	140
CBB35/50	191	CDL4UEDD1	68	CF4SPBK	34	CM2.5S2Y	140
CBB35/50LS	191	CDL4UEDD2	68	CF4SPBU	34	CM2.5S2YG	140
CBB70	192	CDL4UEDD3	68	CF4SPD1	68	CM2.5SBK	140
CBB70LS	192	CDL4UEDD4	68	CF4SPD2	68	CM2.5SBU	140
CBB95	192	CDL4UEDD5	68	CF4SPD3	68	CM2.5SGN	140
CBB95LS	192	CDL4UEL1	69	CF4SPFT	38	CM2.5SO	140
CBBPC1/130	191	CDL4UEL2	69	CF4SPFTBU	38	CM2.5SR	140
CBBPC1/160	191	CDL4UELA90V	70	CF4SPL110-240V	34	CM2.5SY	140
CBBPC1/200	191	CDL4UELD1	69	CF4SPL6-60V	34	CM2.5SYG	140
CBBPC1/250	191	CDL4UELD2	69	CF4U	33	CM4S	141



Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.
CM4S2	141	CMST16W	213	CP3LG2.5	163	CPF	56
CM4S2BK	141	CMST17W	213	CP3LG2.5(I.S)	164	CPFL110-240V	56
CM4S2BU	141	CMST18W	213	CP4	148	CPFL6-60V	56
CM4S2GN	141	CMST19W	213	CP4/3	151	CPG1.5	153
CM4S2O	141	CMST2	214	CP4/3BK	151	CPG1.5/3	155
CM4S2R	141	CMST210W	214	CP4/3BU	151	CPG1.5/4	155
CM4S2Y	141	CMST22W	214	CP4/3GN	151	CPG2.5	154
CM4S2YG	141	CMST23W	214	CP4/3O	151	CPG2.5/3	156
CM4SBK	141	CMST24W	214	CP4/3R	151	CPG2.5/4	156
CM4SBU	141	CMST25W	214	CP4/3Y	151	CPG4	154
CM4SGN	141	CMST26W	214	CP4/4	151	CPG4/3	156
CM4SO	141	CMST27W	214	CP4/4BK	151	CPG4/4	157
CM4SR	141	CMST28W	214	CP4/4BU	151	CPG6/10	154
CM4SY	141	CMST29W	214	CP4/4GN	151	CPG6/10/3	157
CM4SYG	141	CMSTPP	237	CP4/4O	151	CPPT2.5/3	168
CMB4	64	CMT4	63	CP4/4R	151	CPPTG2.5/4	168
CMB4BK	64	CMT4BK	63	CP4/4Y	151	CPST1.5/3	167
CMB4BU	64	CMT4BU	63	CP4BK	148	CPSTG1.5/4	168
CMB4GN	64	CMT4GN	63	CP4BU	148	CSB3/N3U	178
CMB4O	64	CMT4R	63	CP4GN	148	CSB3/N3UL	179
CMB4R	64	CMT4Y	63	CP4LG2.5	164	CSB3/N3USH	179
CMB4W	64	CMTB35	223	CP4O	148	CSB4/N4U	180
CMB4Y	64	CP1.5	147	CP4R	148	CSB4/N4USH	180
CMC1-2	15	CP1.5/3	149	CP4Y	148	CSB5/N5U	180
CMC1-2BU	15	CP1.5/3BK	149	CP6/10	148	CSB5/N5USH	181
CMC2-2	16	CP1.5/3BU	149	CP6/10/3	152	CSC16/3T	103
CMC2-2BU	16	CP1.5/3GN	149	CP6/10/3BK	152	CSC16/3TBU	103
CMDB10/10	52	CP1.5/3O	149	CP6/10/3BU	152	CSC16T	99
CMDB10/2	52	CP1.5/3R	149	CP6/10/3GN	152	CSC16TBK	99
CMDB10/3	52	CP1.5/3Y	149	CP6/10/3O	152	CSC16TBU	99
CMDB10/4	52	CP1.5/4	150	CP6/10/3R	152	CSC16TGN	99
CMDB25/10	52	CP1.5/4BK	150	CP6/10/3Y	152	CSC16TR	99
CMDB25/2	52	CP1.5/4BU	150	CP6/10BK	148	CSC16TY	99
CMDB25/3	52	CP1.5/4GN	150	CP6/10BU	148	CSCG16/3T	103
CMDB25/4	52	CP1.5/4O	150	CP6/10GN	148	CSCG16T	106
CMDB4/10	51	CP1.5/4R	150	CP6/10O	148	CSCP2.5T	142
CMDB4/2	51	CP1.5/4Y	150	CP6/10R	148	CSCP2.5T2	142
CMDB4/3	51	CP1.5BK	147	CP6/10Y	148	CSCP2.5T2BK	142
CMDB4/4	51	CP1.5BU	147	CP8L32	169	CSCP2.5T2BU	142
CMDB6/10	52	CP1.5GN	147	CP8L32(I.S)	170	CSCP2.5T2GN	142
CMDB6/2	52	CP1.5O	147	CP8L32(I.S)H	170	CSCP2.5T2R	142
CMDB6/3	52	CP1.5R	147	CPD1	56	CSCP2.5T2Y	142
CMDB6/4	52	CP1.5Y	147	CPDL1.5	158	CSCP2.5TBK	142
CMDT4	207	CP2.5	148	CPDL1.5(I.S)	159	CSCP2.5TBU	142
CMDT4BK	207	CP2.5/3	150	CPDL1.5BK	158	CSCP2.5TGN	142
CMDT4BU	207	CP2.5/3BK	150	CPDL1.5BU	158	CSCP2.5TR	142
CMDT4R	207	CP2.5/3BU	150	CPDL1.5GN	158	CSCP2.5TY	142
CMDT4S	208	CP2.5/3GN	150	CPDL1.5O	158	CSDL4U	48
CMDT4SH	208	CP2.5/3O	150	CPDL1.5R	158	CSE5U	183
CMDT4SHBK	208	CP2.5/3R	150	CPDL1.5Y	158	CSTSB3	202
CMDT4SHBU	208	CP2.5/3Y	150	CPDL2.5	160	CSTSB3BK	202
CMDT4SHR	208	CP2.5/4	150	CPDL2.5(I.S)	160	CSTSB3BU	202
CMDT4SHY	208	CP2.5/4BK	150	CPDL2.5BK	160	CSTSB3R	202
CMDT4Y	207	CP2.5/4BU	150	CPDL2.5BU	160	CSTSB3Y	202
CMS2.5	120	CP2.5/4GN	150	CPDL2.5GN	160	CSTSB4/N4	203
CMS2.5BK	120	CP2.5/4O	150	CPDL2.5O	160	CSTSB4/N4BK	203
CMS2.5BU	120	CP2.5/4R	150	CPDL2.5R	160	CSTSB4/N4BU	203
CMS2.5GN	120	CP2.5/4Y	150	CPDL2.5Y	160	CSTSB4/N4R	203
CMS2.5R	120	CP2.5BK	148	CPDLG1.5	159	CSTSB4/N4Y	203
CMS2.5Y	120	CP2.5BU	148	CPDLG1.5(I.S)	160	CSTSB5	203
CMST1	213	CP2.5GN	148	CPDLG2.5	161	CSTSB5BK	203
CMST110W	213	CP2.5O	148	CPDLG2.5(I.S)	161	CSTSB5BU	203
CMST12W	213	CP2.5R	148	CPDLK2.5	165	CSTSB5R	203
CMST13W	213	CP2.5Y	148	CPDLK2.5(I.S)	166	CSTSB5Y	203
CMST14W	213	CP3L2.5	162	CPDLKFT2.5	166	CSTSEP2	236
CMST15W	213	CP3L2.5(I.S)	163	CPDLKFT2.5(I.S)	166	CSTSN4	204

Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.
CSTSN415	204	CTS16	201	CTS4UNGN	10	CTSP1L	237
CSTSN415BK	204	CTS16BK	201	CTS4UNO	10	CTSP1SC	237
CSTSN415BU	204	CTS16BU	201	CTS4UNR	10	CTSP2	237
CSTSN415R	204	CTS16R	201	CTS4UNW	10	CTSP3	237
CSTSN415Y	204	CTS16U	11	CTS4UNY	10	CTT2.5UE	65
CSTSN4BK	204	CTS16UBK	11	CTS4USC	59	CTT2.5UJ	65
CSTSN4BU	204	CTS16UBU	11	CTS4USCBU	59	CTT2.5UK	65
CSTSN4R	204	CTS16UGN	11	CTS50/70N	13	CTT2.5UT	65
CSTSN4U	181	CTS16UR	11	CTS50/70NA	13	CX10	98
CSTSN4Y	204	CTS16UY	11	CTS50/70NABK	13	CX10/3	103
CSTSN5	205	CTS16Y	201	CTS50/70NABU	13	CX10/3BK	103
CSTSN515	205	CTS2.5	200	CTS50/70NAGN	13	CX10/3BU	103
CSTSN515BK	205	CTS2.5BK	200	CTS50/70NAR	13	CX10/3GN	103
CSTSN515BU	205	CTS2.5BU	200	CTS50/70NAY	13	CX10/3O	103
CSTSN515R	205	CTS2.5M	199	CTS50/70NBK	13	CX10/3R	103
CSTSN515Y	205	CTS2.5MBK	199	CTS50/70NBU	13	CX10/3Y	103
CSTSN5BK	205	CTS2.5MBU	199	CTS50/70NGN	13	CX10BK	98
CSTSN5BU	205	CTS2.5MR	199	CTS50/70NR	13	CX10BU	98
CSTSN5R	205	CTS2.5MY	199	CTS50/70NY	13	CX10GN	98
CSTSN5U	182	CTS2.5R	200	CTS6	200	CX10O	98
CSTSN5Y	205	CTS2.5UE	10	CTS6BK	200	CX10R	98
CSTSN6	206	CTS2.5UEBK	10	CTS6BU	200	CX10Y	98
CSTSN6BK	206	CTS2.5UEBU	10	CTS6R	200	CX2.5	97
CSTSN6BU	206	CTS2.5UEGN	10	CTS6SC	212	CX2.5/1B	125
CSTSN6R	206	CTS2.5UEO	10	CTS6U	10	CX2.5/2B	126
CSTSN6U	182	CTS2.5UER	10	CTS6UBK	10	CX2.5/3	100
CSTSN6USH	182	CTS2.5UEW	10	CTS6UBU	10	CX2.5/3/1B	126
CSTSN6Y	206	CTS2.5UEY	10	CTS6UGN	10	CX2.5/3BK	100
CTSP	237	CTS2.5UN	9	CTS6UO	10	CX2.5/3BU	100
CTSRP	236	CTS2.5UNBK	9	CTS6UR	10	CX2.5/3GN	100
CTSRN5	206	CTS2.5UNBU	9	CTS6USC	60	CX2.5/3O	100
CTSRN5BK	206	CTS2.5UNGN	9	CTS6USCBU	60	CX2.5/3R	100
CTSRN5BU	206	CTS2.5UNO	9	CTS6UW	10	CX2.5/3Y	100
CTSRN5R	206	CTS2.5UNR	9	CTS6UY	10	CX2.5/4	101
CTSRN5Y	206	CTS2.5UNW	9	CTS6Y	200	CX2.5/4(E)D1	114
CTSRN6	206	CTS2.5UNY	9	CTS70L	210	CX2.5/4(E)D2	114
CTSRN6BK	206	CTS2.5Y	200	CTS70LS	210	CX2.5/4/2B	126
CTSRN6BU	206	CTS25UN	12	CTS95/120N	14	CX2.5/4/4B	127
CTSRN6R	206	CTS25UNBK	12	CTS95/120NBK	14	CX2.5/4BK	101
CTSRN6Y	206	CTS25UNBU	12	CTS95/120NBU	14	CX2.5/4BU	101
CTC4U	66	CTS25UNGN	12	CTS95/120NGN	14	CX2.5/4GN	101
CTL2.5U	21	CTS25UNR	12	CTS95/120NR	14	CX2.5/4O	101
CTL2.5U(I.S)	22	CTS25UNY	12	CTS95/120NY	14	CX2.5/4P	101
CTL2.5UBU	21	CTS35	201	CTS95L	210	CX2.5/4R	101
CTL2.5UH	22	CTS35BK	201	CTS95LS	210	CX2.5/4Y	101
CTL2.5UH(I.S)D2	22	CTS35BU	201	CTSEP01	236	CX2.5BK	97
CTL2.5UHBU	22	CTS35L	209	CTSEP1	236	CX2.5BU	97
CTL2.5UHL	23	CTS35LS	209	CTSEP1SC	236	CX2.5GN	97
CTL2.5UL	23	CTS35R	201	CTSEP2	236	CX2.5O	97
CTLG2.5	24	CTS35UN	12	CTSEP3	236	CX2.5PLN	129
CTLG2.5EMOV-275V	72	CTS35UNA	12	CTSEP4	237	CX2.5PN	129
CTS10	200	CTS35UNABK?	12	CTSPC(100mm)	237	CX2.5PN/10	129
CTS10BK	200	CTS35UNABU	12	CTSPC(130mm)	237	CX2.5PN/11	129
CTS10BU	200	CTS35UNAGN	12	CTSPC(150mm)	237	CX2.5PN/12	129
CTS10R	200	CTS35UNAR	12	CTSPC(200mm)	237	CX2.5PN/13	129
CTS10SC	212	CTS35UNAY	12	CTSPC(240mm)	237	CX2.5PN/14	129
CTS10U	11	CTS35UNBK	12	CTSPC(300mm)	237	CX2.5PN/15	129
CTS10UBK	11	CTS35UNBU	12	CTSPC(330mm)	237	CX2.5PN/2	129
CTS10UBU	11	CTS35UNGN	12	CTSPC(40mm)	237	CX2.5PN/3	129
CTS10UGN	11	CTS35UNR	12	CTSPC(430mm)	237	CX2.5PN/4	129
CTS10UO	11	CTS35UNY	12	CTSPC(460mm)	237	CX2.5PN/5	129
CTS10UR	11	CTS35Y	201	CTSPC(760mm)	237	CX2.5PN/6	129
CTS10USC	60	CTS4SC	211	CTSPC(90mm)	237	CX2.5PN/7	129
CTS10UW	11	CTS4UN	10	CTSPC2-1	191	CX2.5PN/8	129
CTS10UY	11	CTS4UNBK	10	CTSP01	237	CX2.5PN/9	129
CTS10Y	200	CTS4UNBU	10	CTSP1B	237	CX2.5R	97

Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.
CX2.5SN	129	CXDL2.5(E)DD4	114	CXVF2.5AL240V	116	CYDLGF4L6-60V	88
CX2.5SN/10	129	CXDL2.5(E)LD1	114	CXVF2.5AL24V	116	CYDLGF4LR	90
CX2.5SN/11	129	CXDL2.5(E)TS1	114	CXVF2.5AL48V	116	CYDLGF4LRL110-240V	90
CX2.5SN/12	129	CXDL2.5(I.S)	110	CXVF2.5AL60V	116	CYDLGF4LRL6-60V	90
CX2.5SN/13	129	CXDL2.5/2B	127	CXVF2.5B	116	CYDLGK4	92
CX2.5SN/14	129	CXDL2.5/2B(I.S)	128	CXVF2.5BL12V	116	CYDLGK4BU	92
CX2.5SN/15	129	CXDL2.5BK	109	CXVF2.5BL240V	116	CYDLK4	92
CX2.5SN/2	129	CXDL2.5BU	109	CXVF2.5BL24V	116	CYDLK4BU	92
CX2.5SN/3	129	CXDL2.5GN	109	CXVF2.5BL48V	116	CYF4	87
CX2.5SN/4	129	CXDL2.5O	109	CXVF2.5BL60V	116	CYF4BK	87
CX2.5SN/5	129	CXDL2.5R	109	CXVF2.5C	116	CYF4BU	87
CX2.5SN/6	129	CXDL2.5Y	109	CXVF2.5CL12V	116	CYF4L110-240V	87
CX2.5SN/7	129	CXDLG2.5	110	CXVF2.5CL240V	116	CYF4L6-60V	87
CX2.5SN/8	129	CXDLG2.5/2B	127	CXVF2.5CL24V	116	CYG10	80
CX2.5SN/9	129	CXDLG2.5/2B(I.S)	128	CXVF2.5CL48V	116	CYG2.5	79
CX2.5Y	97	CXF4	115	CXVF2.5CL60V	116	CYG4	80
CX4	98	CXF4/3	116	CXVFA	116	CYG4/3	82
CX4/3	102	CXF4/3L110-240V	116	CXVFA12V	116	CYG4/4	82
CX4/3BK	102	CXF4/3L6-60V	116	CXVFAL240V	116	CYG6	80
CX4/3BU	102	CXF4L110-240V	115	CXVFAL24V	116	CYK4	91
CX4/3GN	102	CXF4L6-60V	115	CXVFAL48V	116	CYK4BU	91
CX4/3O	102	CXG10	106	CXVFAL60V	116	DB16	53
CX4/3R	102	CXG10/3	108	CXVFB	116	DB16BK	53
CX4/3Y	102	CXG2.5	104	CXVFB12V	116	DB16BU	53
CX4/4	102	CXG2.5/1B	125	CXVFB1240V	116	DB16GN	53
CX4/4BK	102	CXG2.5/2B	126	CXVFB124V	116	DB16R	53
CX4/4BU	102	CXG2.5/3	106	CXVFB148V	116	DB16Y	53
CX4/4GN	102	CXG2.5/3/1B	126	CXVFB160V	116	DB185	55
CX4/4O	102	CXG2.5/4	107	CXVFC	116	DB25	54
CX4/4R	102	CXG2.5/4/2B	126	CXVFC12V	116	DB25BU	54
CX4/4Y	102	CXG2.5/4/4B	127	CXVFC1240V	116	DB25GN	54
CX4BK	98	CXG4	105	CXVFC124V	116	DB35	54
CX4BU	98	CXG4/3	107	CXVFC148V	116	DB35BK	54
CX4GN	98	CXG4/4	108	CXVFC160V	116	DB35BU	54
CX4O	98	CXG6	105	CY10	78	DB35GN	54
CX4R	98	CXG6/3	108	CY10BU	78	DB35R	54
CX4Y	98	CXK2.5	117	CY2.5	77	DB35Y	54
CX6	98	CXK2.5/4	118	CY2.5BU	77	DB70	54
CX6/3	102	CXK2.5/4BU	118	CY4	78	DDDL4U	48
CX6/3BK	102	CXK2.5BU	117	CY4/3	81	DDDL4UBK	48
CX6/3BU	102	CXK4	118	CY4/3BU	81	DDDL4UBU	48
CX6/3GN	102	CXK4/3	118	CY4/4	82	DDFL4UE110-240V	35
CX6/3O	102	CXK4/3BU	118	CY4/4BU	82	DDFL4UE110V	35
CX6/3R	102	CXK4BU	118	CY4BU	78	DDFL4UE220V	35
CX6/3Y	102	CXLPN	129	CY6	78	DDFL4UE24V	35
CX6BK	98	CXM2.5	119	CY6BU	78	DDFL4UE440V	35
CX6BU	98	CXM2.5BK	119	CYDL2.5	83	DDFL4UE48V	35
CX6GN	98	CXM2.5BU	119	CYDL2.5(I.S)	84	DDFL4UE6-60V	35
CX6O	98	CXM2.5GN	119	CYDL2.5BU	83	DDFL4UELR110V	36
CX6R	98	CXM2.5R	119	CYDL4	85	DDFL4UELR220V	36
CX6Y	98	CXM2.5Y	119	CYDL4(I.S)	86	DDFL4UELR24V	36
CXAF4/3	116	CXMG2.5	120	CYDL4BU	85	DDFL4UELR440V	36
CXAF4/3L110-240V	116	CXPOLN	127	CYDLF4	88	DDFL4UELR48V	36
CXAF4/3L6-60V	116	CXS2.5	121	CYDLF4FT	88	DDFL4ULRW/F	36
CXCC4	124	CXS2.5BK	121	CYDLF4L110-240V	88	DDFL4UW/F	35
CXCP2.5/4	142	CXS2.5BU	121	CYDLF4L6-60V	88	EP1ODL2.5	236
CXDB35/10	123	CXS2.5GN	121	CYDLF4LR	89	EP1ODL4U	236
CXDB35/10A	123	CXS2.5R	121	CYDLF4LRL110-240V	89	EP2.5/4UN	236
CXDIN	129	CXS2.5Y	121	CYDLF4LRL6-60V	89	EP4P	237
CXDL2.5	109	CXS4	122	CYDLG2.5	84	EP6/10U	236
CXDL2.5(E)D1	113	CXSG2.5	122	CYDLG2.5(I.S)	84	EPADLG2.5	236
CXDL2.5(E)D2	113	CXSG4	122	CYDLG4	86	EPAS2.5	236
CXDL2.5(E)D3	113	CXSR2N	129	CYDLG4(I.S)	86	EPAS4	236
CXDL2.5(E)DD1	114	CXSR4N	129	CYDLGF4	88	EPAS6	236
CXDL2.5(E)DD2	114	CXVF2.5A	116	CYDLGF4FT	89	EPATL2.5	236
CXDL2.5(E)DD3	114	CXVF2.5AL12V	116	CYDLGF4L110-240V	88	EPATL2.5H	236

Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.	Cat. No.	Pg. No.
EPATLG2.5	236	GMH8	221	PL-35010002	228	STH4DT	185
EPCAF4U	236	GMH8N	221	PL-35010003	228	STH4DT/S	185
EPCBS3U	236	JX1.5/10	235	PL-35010004	228	STH4DTFT	186
EPCDGL2.5	236	JX1.5/2	235	PL-35010005	228	STH4DTSH	186
EPCDL4UN	236	JX1.5/3	235	PL-35010006	228	STH4DTTP	185
EPCDS6U	236	JX1.5/4	235	PL-35010030	228	STH4TP	176
EPCDTTU	236	JX10/2	235	PL-35010031	228	STH6	176
EPCGT4U	236	JX2.5/10	235	PL-35010032	228	SWCDS	44
EPCKT4U	236	JX2.5/2	235	PL-35010033	228	SWL16	225
EPCKT4U/4	236	JX2.5/3	235	PL-35010034	228	SWL4	225
EPCM1.5S	236	JX2.5/4	235	PL-35010035	228	SWL6	225
EPCM2.5S	236	JX2.5/5	235	PL-35010036	228	TM3.5	221
EPCM4S	236	JX2.5/6	235	PL-35010037	228	TM5	221
EPCMB4	236	JX2.5/7	235	PL-35010038	228	TPSLS	44
EPCMC1-2	236	JX2.5/8	235	PL-35010039	228	TPSLSBK	44
EPCMC2-2	236	JX4/10	235	PP2.5/4UN	237	TPSLSBU	44
EPCMDT4	236	JX4/2	235	PP25UN	237	TPSLSR	44
EPCMS2.5	236	JX4/3	235	PP35UN	237	TPPSLY	44
EPCMT4	236	JX4/4	235	PP6/10U	237	TX2.5	225
EPCP1.5	236	JX4/8	235	PPCBB	237	WLX10	225
EPCP1.5/3	236	JX6/10	235	PPCBB1	237	WLX2.5	225
EPCP1.5/4	236	JX6/2	235	PPCMT4	237	WLX2.5/V	225
EPCP3L2.5	236	JX6/3	235	PPCSFL4U	237	WLX4	225
EPCP4LG2.5	236	JX6/4	235	PPCX10	237	WLX6	225
EPCPDL1.5	236	JXS10/2.5	235	PPCX4	237		
EPCPDLK2.5	236	JXS10/6	235	PPCX4/3	237		
EPCPPT2.5/3	236	JXS4/2.5	235	PPCX4/4	237		
EPCSC16T	236	JXS6/2.5	235	PPCYDL2.5/4	237		
EPCSCP2.5T(L&R)	236	JXS6/4	235	PTB35/50	194		
EPCSTSU	236	LCCDS	44	PTB35/50SH	194		
EPCTC4U	236	MH2.5	223	PTB70/95	195		
EPCTL2.5U	236	MH4	223	PTB70/95SH	195		
EPCTL2.5UH	236	MS3.5WHT	224	RBCP8L32	236		
EPCTLG2.5	236	MS5WHT	224	SCA2.5	223		
EPCX10	236	NEB10	29	SCM0.4/2.5	240		
EPCX10/3	236	NEB6	29	SCM0.5/3	240		
EPCX2.5	236	NES	29	SCM0.8/4	240		
EPCX2.5/3	236	NESCC	31	SCM1/5.5	240		
EPCX2.5/4	236	ODL2.5	17	SCNT4	240		
EPCX2.5SN	236	ODL2.5(I.S)	18	SCNT5	240		
EPCX4	236	ODL2.5A	17	SCNT6	240		
EPCX4/3	236	ODL2.5A(I.S)	18	SCPH1	240		
EPCX4/4	236	ODL4U	20	SCPH2	240		
EPCX6	236	ODL4UA	20	SCPH2I	240		
EPCX6/3	236	ODL4UBU	20	SCS0.5/3	239		
EPCXCP2.5	236	ODLG2.5	18	SCS0.5/3I	239		
EPCXDL2.5	236	ODLG2.5(I.S)	18	SCS0.6/3.5	239		
EPCXM2.5	236	ODLG2.5A	18	SCS0.6/3.5I	239		
EPCXS2.5	236	ODLG2.5A(I.S)	18	SCS0.8/4	239		
EPCYDL2.5/4	236	PDB400	55	SCS0.8/4I	239		
EPDDL4U	236	PL-34000083	227	SCS1/5.5	239		
EPODL2.5	236	PL-34130010	228	SCS1/5.5I	239		
EPODL4U	236	PL-34130015	228	SP2.5/4UN	237		
EPSTH3	236	PL-34130098	227	SP6/10U	237		
EPSTH4	236	PL-34130099	227	SPCDL4U	237		
EPSTH4DT	236	PL-34902001	228	SPCDLG2.5	237		
EPSTH6	236	PL-34902057	228	SPCMB4	237		
EPUSC	236	PL-34902081	228	SPCP8L32	237		
FPCMST	213	PL-35003118	228	STH3	175		
GMH1	221	PL-35003125	228	STH4	176		
GMH2	221	PL-35003135	228				
GMH3	221	PL-35003150	228				
GMH4	221	PL-35003170	228				
GMH5	221	PL-35003200	228				
GMH6	221	PL-35010000	228				
GMH7	221	PL-35010001	228				

**Note:** The product information is carefully compiled and is accurate for most of the application. New findings in materials and process technology necessitate modification of the products. We reserve the right to change / modify the product without intimation. However the changes that take place without notice in no way reduce function or performance of the product.

**MKT/8.2/01 FEBRUARY 2019 x 3000**



**CONNECTWELL INDUSTRIES PVT. LTD.**

D-7, Phase 2, M.I.D.C., Dombivli - 421 204, India

Tel.: + 91 251 7120 600 | Fax : + 91 251 7120 700

connect@connectwell.com | www.connectwell.com